

PURPOSE BUILT  
FOR PERFORMANCE  
SINCE 1956



# PRODUCT CATALOG

PERFORMANCE  
RACING  
DIESEL  
AUTOMOTIVE  
HYDRAULIC  
AGRICULTURE  
LANDSCAPING  
INDUSTRIAL  
SPECIALTY



MADE IN USA  
ISO 9001:2015 REGISTERED MANUFACTURER



# ABOUT CHAMPION

3RD GENERATION FAMILY OWNED AND OPERATED

**CHAMPION BRANDS, LLC, ORIGINALLY LOWE OIL CO. FOUNDED BY RALPH LOWE IN 1956, IS A GLOBALLY RECOGNIZED INDUSTRY LEADER IN SPECIALTY LUBRICANTS FOR OVER 60 YEARS.**

**CHAMPION PRODUCES AND BLENDS OVER 300 PRODUCTS INCLUDING FUEL, OIL, ENGINE ADDITIVES, AND LUBRICANTS FOR THE RACING, AUTOMOTIVE, HEAVY TRUCK, AGRICULTURAL, INDUSTRIAL AND SPECIALTY MARKETS.**

**CHAMPION BRANDS UNDERSTANDS THE COMPLEXITIES OF DOING BUSINESS IN TODAY'S MARKET AND IS ALWAYS LOOKING FOR NEW AND BETTER WAYS TO MAKE YOUR COMPANY MORE EFFICIENT AND INCREASE YOUR BOTTOM LINE. QUALITY PRODUCTS ARE MORE THAN A COMMITMENT AT CHAMPION; OUR HIGH STANDARDS DEFINE THE WAY THAT WE DO BUSINESS.**

**OUR HEADQUARTERS, LOCATED IN CLINTON, MO IS IDEAL FOR TIMELY, COST EFFECTIVE SERVICE AND DISTRIBUTION. WE ARE TRULY MANUFACTURING IN THE "HEART" OF THE UNITED STATES.**

ABOUT CHAMPION



**IN 2017, CHAMPION BRANDS, LLC BECAME THE FIRST LUBRICANTS MANUFACTURER IN THE USA TO EARN AN ISO 9001:2015 DESIGNATION.**

# TABLE OF CONTENTS

<b>ABOUT CHAMPION</b>	<b>2</b>
<b>PRODUCTS:</b>	
<b>PASSENGER CAR MOTOR OILS (PCMOS)</b>	<b>4-7</b>
<b>RACING MOTOR OILS</b>	<b>8-9</b>
<b>RACING BRAKE FLUID</b>	<b>10</b>
<b>RACING GEAR LUBRICANTS</b>	<b>10</b>
<b>ENGINE BUILDER PRODUCTS</b>	<b>11</b>
<b>MODERN MUSCLE® MOTOR OILS</b>	<b>12-13</b>
<b>CLASSIC &amp; MUSCLE® MOTOR OILS</b>	<b>14-15</b>
<b>BLUE FLAME® DIESEL OILS</b>	<b>16-17</b>
<b>HEAVY DUTY DIESEL OILS</b>	<b>18-19</b>
<b>DIESEL FUEL ADDITIVES</b>	<b>20</b>
<b>FUEL TREATMENTS</b>	<b>21</b>
<b>2-CYCLE / 4-CYCLE OILS</b>	<b>22</b>
<b>CONVENTIONAL OILS</b>	<b>23</b>
<b>AUTOMOTIVE CHEMICALS</b>	<b>24</b>
<b>BRAKE FLUIDS</b>	<b>25</b>
<b>AEROSOLS / CLEANERS</b>	<b>26</b>
<b>CAR CARE PRODUCTS</b>	<b>27</b>
<b>TRANSMISSION FLUIDS</b>	<b>28</b>
<b>GEAR LUBRICANTS</b>	<b>29</b>
<b>GREASE PRODUCTS</b>	<b>30</b>
<b>SPECIALTY PRODUCTS</b>	<b>31</b>
<b>INDUSTRIAL OILS</b>	<b>32</b>
<b>HYDRAULIC FLUIDS</b>	<b>33</b>
<b>TRACTOR FLUIDS</b>	<b>34-35</b>
<b>SEASONAL PRODUCTS</b>	<b>36</b>
<b>APPAREL/MARKETING MATERIAL</b>	<b>37</b>
<b>PHOTO GALLERY</b>	<b>38</b>
<b>PRIVATE LABEL CAPABILITIES</b>	<b>39</b>

# MOTOR OIL (PCMO)

## SYNGOLD® FULL SYNTHETIC MOTOR OIL

FULL SYNTHETIC FORMULA  
INCREASES FUEL ECONOMY  
REDUCES WEAR AND VISCOSITY BREAKDOWN

EXCEEDS ALL WARRANTY REQUIREMENTS FOR OEMS REQUIRING  
API SN/SN+ OR ILSAC GF-5 ENGINE OILS

FORMULATED TO EXCEED THE LATEST DEXOS1 SPECIFICATIONS  
(SAE 0W-20 AND 5W-30), DEXOS1:2015

# Syn Gold

Full Synthetic  
Motor Oil

PART#	DESCRIPTION	SIZE
4428H/6	0W-30 SN+/GF-5*	6/ 1 QT.
4428AN	0W-30 SN+/GF-5*	55 Gal.
4428N/4	0W-30 SN+/GF-5*	4/ 1 Gal.
4429H/6	0W-20 SN+/GF-5*	6/ 1 QT.
4429AN	0W-20 SN+/GF-5*	55 Gal.
4430H/6	5W-20 SN+/GF-5*	6/ 1 QT.
4430N/4	5W-20 SN+/GF-5*	4/ 1 Gal.
4430AN	5W-20 SN+/GF-5*	55 Gal.
4431H/6	5W-30 SN+/GF-5*	6/ 1 QT.
4431N/4	5W-30 SN+/GF-5*	4/ 1 Gal.
4431AN	5W-30 SN+/GF-5*	55 Gal.
4432H/6	5W-40 SN+	6/ 1 QT.
4427H/6	0W-40 European High SAPS	6/ 1 QT.
4427N/4	0W-40 European High SAPS	4/ 1 Gal.
4434H/6	5W-40 European High SAPS	6/ 1 QT.
4434N/4	5W-40 European High SAPS	4/ 1 Gal.
4436H/6	5W-30 European Low SAPS	6/ 1 QT.
4436N/4	5W-30 European Low SAPS	4/ 1 Gal.

\*GF-6 available 5/1/2020

**INCREASED PERFORMANCE**  
**INCREASED PROTECTION**



API LICENSED - SYNGOLD®

# SynGold®

Full Synthetic  
Motor Oil



Champion SynGold® Engine Oils are built with robust additives and extremely pure synthetic base oils to deliver ultra-premium protection for your vehicles.

These oils provide protection far exceeding industry requirements. Excellent film strength and shear stability, reduced start-up wear, improved oxidation resistance and cleanliness and lower volatility make

SynGold® is the gold standard in today's most demanding light duty gasoline engines.

- Resists thickening, sludge and varnish to keep engines clean and running efficiently
- Excellent pumpability ensures easy cold-starts and reduced cold-start engine wear
- Low volatility reduces oil consumption and prevents oil thickening and sludging
- Reduced friction delivers excellent fuel compared with industry standards
- Robust additives and high quality synthetic base oil allows for longer oil service intervals than conventional engine oils

Available in full range of sizes and SAE grades to fit all needs

# MOTOR OIL (PCMO)

## SYNCCLEAN® SYNTHETIC BLEND MOTOR OIL

EXTENDS ENGINE LIFE  
OUTPERFORMS CONVENTIONAL OILS  
LOWER POUR POINT PUMPS FLUID FASTER TO PARTS

EXCEEDS ALL WARRANTY REQUIREMENTS FOR OEMS REQUIRING  
API SN/SN+ OR ILSAC GF-5 ENGINE OILS

RECOMMENDED OIL FOR GASOLINE, TURBO-CHARGED GASOLINE AND  
E-85 FLEX-FUEL ENGINES



API LICENSED - SYNCCLEAN®

PART#	DESCRIPTION	SIZE
4230H/12	5W-20 SN+/GF-5*	12/ 1 QT.
4230N/4	5W-20 SN+/GF-5*	4/ 1 Gal.
4230AN	5W-20 SN+/GF-5*	55 Gal.
4231H/12	5W-30 SN+/GF-5*	12/ 1 QT.
4231N/4	5W-30 SN+/GF-5*	4/ 1 Gal.
4231AN	5W-30 SN+/GF-5*	55 Gal.
4232H/12	10W-30 SN+/GF-5*	12/ 1 Qt.
4232N/4	10W-30 SN+/GF-5*	4/ 1 Gal.
4232D	10W-30 SN+/GF-5*	5 Gal.
4232AN	10W-30 SN+/GF-5*	55 Gal.
4233N/4	10W-40 SN+	4/ 1 Gal.
4229N/4	20W-50 SN+	4/ 1 Gal.

\*GF-6 available 5/1/2020



## REDUCES WEAR AND VISCOSITY BREAKDOWN

Advanced Low Friction Formula  
Fórmula avanzada de baja fricción  
Superior Protection  
Protección superior

32 FL. OZ.  
946 ml

# SynClean<sup>®</sup>

**SYNTHETIC BLEND  
MOTOR OIL**




Champion SynClean™ synthetic blend motor oil extends engine life by significantly reducing wear and viscosity breakdown through pioneering advancements in oil technology. SynClean's shear stable additive system in combination with Champion's mixture of premium water white base oils and synthetic fluid outperform all previous engine oils for protection and durability from wear and viscosity breakdown.

SynClean's premium sludge control is achieved using highly effective antioxidant and dispersant additives.

- Excellent wear protection and engine cleanliness at oil temperatures
- Excellent pumpability ensures easy cold-starts and reduced cold-start engine wear
- Low volatility reduces oil consumption and prevents oil thickening and sludging
- Reduced friction delivers excellent fuel compared with industry standards
- Better fuel economy retention than both API SN Resource Conserving and ILSAC GF-5
- Lower pour point pumps fluid faster to moving parts reducing cold weather wear

**Available in full range of sizes and SAE grades to fit all needs**

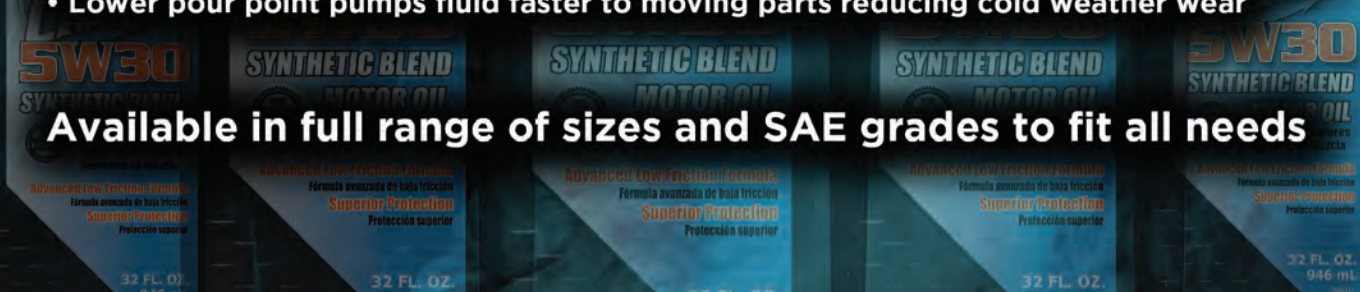

# PURPOSE BUILT FOR PERFORMANCE

SINCE 1956



**RACING - MUSCLE - DIESEL**

CHAMPIONS USE  
**CHAMPION!**

**LUBRICANTS - CHEMICALS - ADDITIVES  
BRAKE FLUIDS - AEROSOLS - and more**



# RACING OIL

## HIGH PERFORMANCE RACING MOTOR OIL

CHAMPION RACING OILS ARE PURPOSE BUILT PRODUCTS DESIGNED FOR SEVERE RACING APPLICATIONS. THESE PRODUCTS CONTAIN CHAMPION'S PROPRIETARY TVS® (THERMAL VISCOSITY STABILIZER), SPECIAL LUBRICITY MODIFIERS, AND A PREMIUM LEVEL OF ANTI-WEAR ADDITIVES.

CHAMPION RACING OILS ARE SUITABLE FOR USE IN ALL COMPETITION ENGINES, ESPECIALLY THOSE USING FLAT TAPPET AND/OR ROLLER CAMS OPERATING AT HIGH RPMs AND REQUIRING HIGH PRESSURE (STIFF) VALVE SPRINGS. OFFERED IN A POPULAR RANGE OF MULTI-VISCOSITY SAE GRADES AND FORMULATED TO MEET THE DEMANDS OF TODAY'S HIGH PERFORMANCE RACE ENGINES.

PART#	DESCRIPTION	SIZE
4104H/12	10W-30 SYN-BLEND	12/ 1 QT.
4104D	10W-30 SYN-BLEND	5 Gal.
4104AN	10W-30 SYN-BLEND	55 Gal.
4309H/12	15W-50 FULL SYNTHETIC	12/ 1 QT.
4309D	15W-50 FULL SYNTHETIC	5 Gal.
4080H/12	10W-40 SYNTHETIC BLEND	12/ 1 QT.
4111H/12	20W-50 SYN-BLEND	12/ 1 QT.
4111D	20W-50 SYN-BLEND	5 Gal.
4111AN	20W-50 SYN-BLEND	55 Gal.
4362D	10W FULL SYNTHETIC	5 Gal.
4360H/6	0W-20 FULL SYNTHETIC	6/ 1 QT.
4360D	0W-20 FULL SYNTHETIC	5 Gal.
4360AN	0W-20 FULL SYNTHETIC	55 Gal.
4361H/6	0W-30 FULL SYNTHETIC	6/ 1 QT.
4361D	0W-30 FULL SYNTHETIC	5 Gal.
4361AN	0W-30 FULL SYNTHETIC	55 Gal.
4201D	50W SYNTHETIC BLEND	5 Gal.
4201AN	50W SYNTHETIC BLEND	55 Gal.
4202D	60W SYNTHETIC BLEND	5 Gal.
4202AN	60W SYNTHETIC BLEND	55 Gal.
4204D	70W SYNTHETIC BLEND	5 Gal.
4204AN	70W SYNTHETIC BLEND	55 Gal.



RACING OILS

## MICRO-SPRINT RACING FULL SYNTHETIC MOTOR OIL

CHAMPION FULL SYNTHETIC MICRO SPRINT RACING OILS ARE THE FIRST PURPOSE-BUILT ENGINE OILS SPECIALLY FORMULATED TO PROVIDE UNMATCHED PROTECTION AND PERFORMANCE IN WET-CLUTCH MICRO SPRINT ENGINES.

PART#	DESCRIPTION	SIZE
4445H/12	10W-40 FULL SYNTHETIC	12/ 1 QT.
4446H/12	20W-50 FULL SYNTHETIC	12/ 1 QT.



# RACING PRODUCTS

## RACING GEAR LUBE FULL SYNTHETIC


EXTREME CONDITIONS FORMULA  
CONTAINS SHOCK LOAD CHEMISTRY  
PROVEN TO REDUCE HEAT, WEAR AND FRICTION



PART#	DESCRIPTION	SIZE
4312H/12	75W-90 FULL SYNTHETIC	12/ 1 QT.
4312D	75W-90 FULL SYNTHETIC	5 Gal.
4312AN	75W-90 FULL SYNTHETIC	55 Gal.
4371H/12	75W-140 FULL SYNTHETIC	12/ 1 QT.
4371D	75W-140 FULL SYNTHETIC	5 Gal.
4285V/12	LIMITED SLIP ADDITIVE	12/ 4 OZ.

## RACING BRAKE FLUID 600 SERIES - DOT 4

DEVELOPED FOR EXTREME APPLICATIONS  
RACE PROVEN BY TOP-TIER DOMESTIC/INTERNATIONAL TEAMS  
ULTIMATE IN HIGH TEMPERATURE PROTECTION



PART#	DESCRIPTION	SIZE
4059K/12	<b>DOT 4 RACING BRAKE FLUID</b> Typical Boiling Points: Dry 304°C (580°F) Wet 210°C (410°F)	12/ 12 OZ.

## RACING COOLANT ADDITIVE NON-GLYCOL FORMULA

LOWERS ENGINE TEMPS BY UP TO 25°  
MAXIMUM CORROSION PROTECTION  
FOR USE ON TRACK, STREET OR OFF-ROAD



PART#	DESCRIPTION	SIZE
4290I/12	RACING COOLANT ADDITIVE	12/ 16 OZ.

# ENGINE PRODUCTS

## POWERSHIELD® BREAK-IN OIL

CHAMPION POWERSHIELD® BREAK-IN MOTOR OIL IS PURPOSE-BUILT TO REDUCE THE POTENTIAL OF ENGINE FAILURE DURING HARD BREAK-IN.

CONTAINS HIGH LEVELS OF ZINC-THIOPHOSPHATES IN COMBINATION WITH CHAMPION'S PROPRIETARY TVS® (THERMAL VISCOSITY STABILIZER), WHICH EXTENDS OIL FILM CAPACITY FOR PROPER RING SEATING. RECOMMENDED FOR ALL TYPES OF ENGINES.



PART#	DESCRIPTION	SIZE
4270H/12	SAE 30 BREAK-IN OIL	12/ 1 QT.
4270D	SAE 30 BREAK-IN OIL	5 Gal.
4270AN	SAE 30 BREAK-IN OIL	55 Gal.
4272D	10W-40 BREAK-IN OIL	5 Gal.
4273D	20W-50 BREAK-IN OIL	5 Gal.



## POWERSHIELD® ENGINE ASSEMBLY LUBE & OIL BOOSTER

CHAMPION POWERSHIELD® ENGINE ASSEMBLY LUBE & OIL BOOSTER PROVIDES TOP-TIER RESISTANCE TO SCUFFING, WEAR AND FRICTION DURING HARD BREAK-IN OF ENGINES.

RECOMMENDED FOR USE ON ROCKER ARM FULCRUM BALLS, NEEDLE BEARINGS, ROLLER TIPS, ROCKER SHAFTS, TIMING CHAIN SPROCKETS AND GEARS, ROLLER LIFTERS AND CAMSHAFTS, ENGINE BEARING SURFACES, AND OUTER SURFACE OF LIFTER BODIES.

THIS PRODUCT CAN ALSO BE USED AS AN OIL BOOSTER TO REPLACE THE CRITICAL ANTI-WEAR ADDITIVES THAT CURRENT API RATED ENGINE OILS LEAVE OUT.

PART#	DESCRIPTION	SIZE
4281K/12	ENGINE ASSEMBLY LUBE	12/ 12 OZ.
4281D	ENGINE ASSEMBLY LUBE	5 Gal.



## PROFESSIONAL GRADE HONING OIL

SUITABLE FOR A WIDE RANGE OF APPLICATIONS  
EXCELLENT LUBRICITY CHARACTERISTICS  
HIGH-PERFORMANCE ANTI-FOAM AGENTS

PART#	DESCRIPTION	SIZE
4242D	PRO GRADE HONING OIL	5 Gal.



POWERSHIELD®

# INTRODUCING THE NEW BREED

# CHAMPION

HI-TECH<sup>®</sup> LUBRICANTS



## MODERN <sup>®</sup> MUSCLE HIGH PERFORMANCE MOTOR OIL



**PURPOSE BUILT FOR  
HIGH PERFORMANCE  
STREET ENGINES**

# MODERN MUSCLE

## MODERN MUSCLE FULL SYNTHETIC HIGH PERFORMANCE MOTOR OIL

CHAMPION MODERN MUSCLE HIGH PERFORMANCE MOTOR OILS ARE SPECIFICALLY FORMULATED TO MAXIMIZE PERFORMANCE AND MEET THE DEMANDS OF TODAY'S HIGH PERFORMANCE STREET ENGINES.

RECOMMENDED FOR THOSE SEEKING A HIGHER LEVEL OF PERFORMANCE AND PROTECTION FOR "LATE MODEL VEHICLES" AND "CRATE ENGINES" THAT ARE UNDER A MANUFACTURER OR ENGINE BUILDER WARRANTY THAT REQUIRES AN API LICENSED MOTOR OIL.

CHAMPION MODERN MUSCLE MOTOR OILS UTILIZE CHAMPION'S "BLUE E.T.®" (ENHANCED TECHNOLOGY) RACING ADDITIVE, AND CHAMPION'S TVS® (THERMAL VISCOSITY STABILIZER) PERFORMANCE ADDITIVE. THESE PROPRIETARY TECHNOLOGIES DELIVER UNMATCHED FILM STRENGTH AT HIGH TEMPERATURES, BETTER PISTON RING SEAL FOR MAXIMUM COMPRESSION, AND INCREASED HORSEPOWER AND TORQUE IN MOST ENGINES.

MODERN MUSCLE

PART#	DESCRIPTION	SIZE
4401H/12	5W-30 FULL SYNTHETIC	12/ 1 QT.
4402H/12	0W-40 FULL SYNTHETIC	12/ 1 QT.
4403H/12	5W-50 FULL SYNTHETIC	12/ 1 QT.

**5W-30**  
 CHAMPION MODERN MUSCLE 5W-30 MOTOR OIL IS AN API SN LICENSED SAE 5W-30 THAT EXCEEDS DEXOS 1:2010 (ver. 1) and DEXOS 1:2015 (ver. 2). CHAMPION RECOMMENDS THIS OIL FOR FORD RAPTOR 3.5L, FORD TURBO ENGINE, CHEV. CAMARO 6.2L, CHEV. CAMARO 3.6L, CHEV. CORVETTE 6.2L, CHEV. SS MODELS 6.2L, CHEV. TURBO ENGINES, CADILLAC TURBO ENGINES, LINCOLN TURBO ENGINES AND OTHERS, INCLUDING OEM/ENGINE BUILDER "CRATE MOTORS" REQUIRING A HIGH PERFORMANCE 5W-30 VISCOSITY.



**0W-40**  
 CHAMPION MODERN MUSCLE 0W-40 MOTOR OIL IS AN API SN LICENSED SAE 0W-40 WHICH CHAMPION RECOMMENDS FOR DODGE VIPER 8.4L, DODGE CHALLENGER 6.4L, DODGE CHARGER 6.4L, ADDITIONAL MODERN DODGE HEMI MOTORS, JEEP 6.4L, NISSAN GTR 3.8L AND OTHERS, PLUS OEM/ENGINE BUILDER "CRATE MOTORS" REQUIRING A HIGH PERFORMANCE 0W-40 VISCOSITY.



**5W-50**  
 CHAMPION MODERN MUSCLE 5W 50 MOTOR OIL IS AN API SN LICENSED SAE 5W 50 WHICH CHAMPION RECOMMENDS FOR FORD COYTE 5.0L, FORD MUSTANG 5.2L, ROUSH MUSTANG 5.2L, SHELBY GT350, SHELBY GT350R, SHELBY GT500, AND OTHERS, PLUS OEM /ENGINE BUILDER "CRATE MOTORS" REQUIRING A HIGH PERFORMANCE 5W-50 VISCOSITY.



# HIGH ZINC FORMULA HIGH PERFORMANCE



# CLASSIC & MUSCLE

## CLASSIC & MUSCLE® MOTOR OIL HOT ROD / STREET ROD / CLASSIC / MUSCLE

CHAMPION CLASSIC & MUSCLE® HIGH PERFORMANCE MOTOR OILS ARE SPECIFICALLY FORMULATED TO MEET THE LUBRICATION DEMANDS OF HIGH PERFORMANCE HOT ROD, STREET ROD, CLASSIC AND MUSCLE CAR ENGINES OPERATING UNDER EXTREME CONDITIONS.


SPECIALLY FORMULATED FOR ENGINES USING FLAT TAPPET AND/OR ROLLER CAMS OPERATING AT HIGH RPMs AND REQUIRING HIGH-PRESSURE (STIFF) VALVE SPRINGS.

CHAMPION CLASSIC & MUSCLE® HIGH PERFORMANCE MOTOR OILS ARE HIGH PERFORMANCE MOTOR OILS ARE BLENDED WITH A PREMIUM ZDDP ANTI-WEAR PROTECTION PACKAGE, CONTAINING A UNIQUE CHEMISTRY OF HIGH LEVELS OF ZINC AND PHOSPHORUS.

CHAMPION CLASSIC & MUSCLE® MOTOR OILS DELIVER UNMATCHED FILM STRENGTH AT HIGH TEMPERATURE < BETTER PISTON RING SEAL FOR MAXIMUM COMPRESSION, AND INCREASES THE FOOT POUNDS OF TORQUE IN MOST ENGINES.

PART#	DESCRIPTION	SIZE
4130H/6	10W-30 SYNTHETIC BLEND	6/ 1 QT.
4130AN	10W-30 SYNTHETIC BLEND	55 Gal.
4124H/6	20W-50 SYNTHETIC BLEND	6/ 1 QT.
4124AN	20W-50 SYNTHETIC BLEND	55 Gal.
4350H/6	15W-50 FULL SYNTHETIC	6/ 1 QT.
4350AN	15W-50 FULL SYNTHETIC	55 Gal.

Data from Petroleum Quality Institute of America

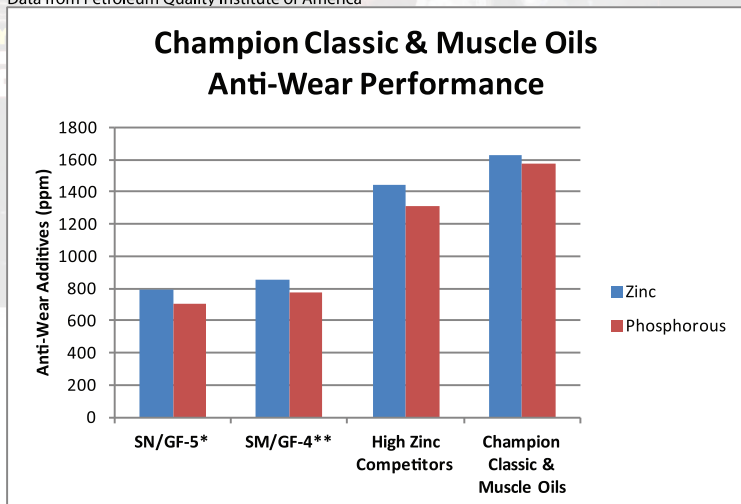

\*Averages for 13 major brands of SN/GF-5 motor oil

\*\*Averages for 13 major brands of SM/GF-4 motor oil



CLASSIC & MUSCLE®

# BLUE FLAME DIESEL

## BLUE FLAME® HIGH PERFORMANCE DIESEL OIL

INCREASES HORSEPOWER AND TORQUE  
MEETS EXTREME PERFORMANCE DEMANDS  
MEETS AND EXCEEDS OEM SPECIFICATIONS

API CK-4 / CJ-4 / CI-4



PART#	DESCRIPTION	SIZE
4358H/12	15W-40 SYN-BLEND CK-4/SN	12/ 1 QT.
4358N	15W-40 SYN-BLEND CK-4/SN	4/ 1 Gal.
4358AN	15W-40 SYN-BLEND CK-4/SN	55 Gal.
4359H/12	15W-40 CLASSIC BLEND (PRE-2007)	12/ 1 QT.
4359N	15W-40 CLASSIC BLEND (PRE-2007)	4/ 1 Gal.
4359AN	15W-40 CLASSIC BLEND (PRE-2007)	55 Gal.



ADVANCED PROTECTION FOR NEWER AND OLDER HEAVY-DUTY ENGINES

BACKED BY TOP-TIER TECHNOLOGY AND TESTING PRACTICES

CHAMPION BLUE FLAME® SYNTHETIC BLEND CK-4 OIL (4358) MEETS AND EXCEEDS THE FOLLOWING SPECIFICATIONS:

- API CK-4, CJ-4, CI-4 Plus, SN
- Volvo VDS-4.5, VDS-4
- Detroit Diesel DFS93K218
- Ford WSS-M2C171-F1
- ACEA E7-12, E9-12, JASO DH-2
- Cummins CES 20086, CES 20081
- Detroit Diesel DFS93K222
- Mack EO-O Premium Plus

CHAMPION BLUE FLAME® SYN-BLEND CLASSIC OIL (4359) MEETS AND EXCEEDS THE FOLLOWING SPECIFICATIONS:

- API CI-4 Plus, CI-4, CH-4, SJ
- Cummins CES 20081
- Detroit Diesel DFS93K215
- ACEA E7, E6, E5, E4, E3, E2
- Detroit Diesel DFS93K218
- Detroit Diesel DFS93K214

BLUE FLAME® DIESEL OILS



CHAMPIONS USE  
**CHAMPION!**

SINCE 1956  
PURPOSE BUILT OIL



# HEAVY DUTY DIESEL

## HEAVY DUTY DIESEL OILS PREMIUM HD / ALL FLEET T® / ULTRAFLEET®

EXCELLENT PROTECTION FOR DIESEL ENGINES  
INCREASED SOOT CONTROL AND OXIDATION CONTROL  
MEETS AND EXCEEDS OEM SPECIFICATIONS

API CK-4 / CJ-4 / FA-4 / CNG-LNG

PART#	DESCRIPTION	SIZE
4152AN	15W-40 CK-4/SN PREMIUM HD	55 Gal.
4152U	15W-40 CK-4/SN PREMIUM HD	2/ 2.5 Gal.
4152D	15W-40 CK-4/SN PREMIUM HD	5 Gal.
4152N/4	15W-40 CK-4/SN PREMIUM HD	4/ 1 Gal.
4152H/12	15W-40 CK-4/SN PREMIUM HD	12/ 1 Qt.
4160AN	10W-30 CK-4 ALL-FLEET T	55 Gal.
4160N/4	10W-30 CK-4 ALL-FLEET T	4/ 1 Gal.
4160H/12	10W-30 CK-4 ALL-FLEET T	12/ 1 Qt.
4158AN	15W-40 CK-4/SN ALL-FLEET T	55 Gal.
4158N/4	15W-40 CK-4/SN ALL-FLEET T	4/ 1 Gal.
4158U	15W-40 CK-4/SN ALL-FLEET T	2/ 2.5 Gal.
4158H/12	15W-40 CK-4/SN ALL-FLEET T	12/ 1 Qt.
4158D	15W-40 CK-4/SN ALL-FLEET T	5 Gal.
4173AN	5W-40 CK-4/SN ALL-FLEET T	55 Gal.
4173D	5W-40 CK-4/SN ALL-FLEET T	5 Gal.
4159N/4	15W-40 CK-4/SN ULTRA FLEET SYN-BLEND	4/ 1 Gal.
4159AN	15W-40 CK-4/SN ULTRA FLEET SYN-BLEND	55 Gal.
4161N/4	10W-30 CK-4 ULTRA FLEET SYN-BLEND	4/ 1 Gal.
4162N/4	10W-30 FA-4 ULTRA FLEET SYN-BLEND	4/ 1 Gal.
4164N/4	5W-40 CK-4/SN ULTRA FLEET SYN-BLEND	4/ 1 Gal.
4174AN	5W-30 CJ-4 ULTRA FLEET FULL SYNTHETIC	55 Gal.
4163D	15W-40 CNG/LNG OIL	5 Gal.



**BETTER PROTECTION AND  
LONGER DRAIN INTERVALS  
THAN OTHER LEADING  
HEAVY-DUTY DIESEL OILS**

HEAVY DUTY DIESEL OILS

# IT'S A NEW DAY FOR DIESEL OIL

INTRODUCING THE NEW CHAMPION  
CK-4 HEAVY DUTY DIESEL ENGINE OILS



**Champion All Fleet T<sup>®</sup> and UltraFleet<sup>®</sup>  
Heavy Duty Diesel Oils**  
are designed to provide industry-leading  
performance - meeting the needs  
of next gen heavy duty engines.

**Purpose Built for Performance.**

# DIESEL ADDITIVES

## DIESEL FLO® ANTI-GEL / DE-ICER FUEL CONDITIONER

PERFORMS IN LOW SULFUR AND ULTRA LOW SULFUR DIESEL AND BIODIESEL BLENDS  
REDUCES THE POURING POINT AND GEL TEMPERATURE OF FUEL  
HELPS PREVENT FUEL FILTER ICING AND COLD-FILTER PLUGGING  
CONTAINS CETANE BOOSTER

PART#	DESCRIPTION	SIZE
4183H/12	ANTI-GEL & DE-ICER (32 oz treats 250 Gallons)	12/ 1 QT.
4183D	ANTI-GEL & DE-ICER (5 gal treats 5000 Gallons)	5 Gal.
4183AN	ANTI-GEL & DE-ICER (55 gal treats 55000 Gallons)	55 Gal.

## POWER PLUS® DIESEL FUEL CONDITIONER

RAPIDLY CLEANS UP CARBON DEPOSITS  
INCREASES POWER, ACCELERATION AND FUEL ECONOMY  
PERFORMS IN ALL DIESEL FUELS AND BIODIESEL BLENDS  
CONTAINS CETANE BOOSTER  
EXTENDS FUEL SYSTEM COMPONENT LIFE

PART#	DESCRIPTION	SIZE
4277H/12	DIESEL FUEL CONDITIONER (32 oz treats 250 Gallons)	12/ 1 QT.

SUPER CONCENTRATED  
**DIESEL FLO®**  
FUEL CONDITIONER

SUPER CONCENTRATED  
**POWER+  
PLUS**  
DIESEL FUEL CONDITIONER  
with **CETANE BOOST**

# FUEL TREATMENTS

## EGUARD® ETHANOL FUEL TREATMENT

STABILIZES FUEL AND PREVENTS CORROSION  
REDUCES FRICTION AND GUM FORMATION  
CLEANS COMBUSTION CHAMBERS AND PORT FUEL INJECTORS

eGuard®

PART#	DESCRIPTION	SIZE
4207M/12	ETHANOL FUEL TREATMENT	12/ 8 OZ.
4207D	ETHANOL FUEL TREATMENT	5 Gal.

## FUEL STABILIZER CONCENTRATED FUEL TREATMENT

DESIGNED FOR 2 & 4 CYCLE ENGINES  
KEEPS GASOLINE AND DIESEL FUEL FRESH DURING STORAGE  
PREVENTS CORROSION AND VARNISH BUILD-UP

PART#	DESCRIPTION	SIZE
4205M/12	FUEL STABILIZER	12/ 8 OZ.



FUEL TREATMENTS

# 2 CYCLE / 4 CYCLE

## 2-CYCLE POWER EQUIPMENT OIL WITH FUEL STABILIZER

AVAILABLE IN SYNTHETIC BLEND AND FULL SYNTHETIC PREMIUM QUALITY, CLEAN BURNING FORMULA PURPOSE BUILT FOR 2-STROKE AND 4-MIX ENGINES MEETS AND EXCEEDS API TC, JASO FD AND ISO-L-EGD



PART#	DESCRIPTION	SIZE
4115L	2-CYCLE PE OIL SYN-BLEND	48/ 2.56 OZ.
4115J	2-CYCLE PE OIL SYN-BLEND	48/ 6.4 OZ.
4115K	2-CYCLE PE OIL SYN-BLEND	12/ 12.8 OZ.
4115N	2-CYCLE PE OIL SYN-BLEND	4/ 1 Gal.
4115D	2-CYCLE PE OIL SYN-BLEND	5 Gal.
4115DP	2-CYCLE PE OIL SYN-BLEND	5 Gal. (Pail)
4115AC	2-CYCLE PE OIL SYN-BLEND	55 Gal.
4115N	2-CYCLE PE OIL SYN-BLEND	4/ 1 Gal.
4145L	2-CYCLE PE OIL FULL-SYN	48/ 2.56 OZ.
4145K	2-CYCLE PE OIL FULL-SYN	12/ 12.8 OZ.
4145N	2-CYCLE PE OIL FULL-SYN	4/ 1 Gal.
4145D	2-CYCLE PE OIL FULL-SYN	5 Gal.
4090K	WP2 2-CYCLE RACING OIL	12/ 12.8 OZ.
4090N	WP2 2-CYCLE RACING OIL	4/ 1 Gal.

## 2-CYCLE ENGINE OIL PREMIUM QUALITY ASHLESS

BUILT TO EXCEED THE REQUIREMENTS OF LEADING ENGINE MANUFACTURERS SUPER TOUGH FILM OIL PROTECTS AGAINST ENGINE WEAR AND CORROSION MEETS THE LUBRICATION AND HIGH TEMPERATURE REQUIREMENTS FOR CHAIN SAWS MEETS AND EXCEEDS API TC

PART#	DESCRIPTION	SIZE
4025H	2-CYCLE ENGINE OIL	12/ 1 QT.
4025J	2-CYCLE ENGINE OIL	24/ 8 OZ.
4425V	2-CYCLE ENGINE OIL	24/ 2.6 OZ.

## 4-CYCLE LAWNMOWER OIL SAE 30 PERFORMANCE LUBRICANT

ANTIWEAR ADDITIVE PROVIDES EXCEPTIONAL LOAD CARRYING CHARACTERISTICS PROVIDES MAXIMUM PROTECTION AGAINST RUST AND CORROSION RESISTANT TO HIGH TEMPERATURE OXIDATION AND DEPOSIT FORMATION SPECIALLY FORMULATED FOR THE NEEDS OF TODAY'S SMALL ENGINES

PART#	DESCRIPTION	SIZE
4092E	4-CYCLE LAWNMOWER OIL	12/ 20 OZ.
4092H	4-CYCLE LAWNMOWER OIL	12/ 1 QT.



2-CYCLE / 4-CYCLE OILS

# CONVENTIONAL OILS

## HIGH MILEAGE MOTOR OIL

CHAMPION HIGH MILEAGE MOTOR OILS ARE FORMULATED TO PROTECT YOUR VEHICLE'S ENGINE BY BOOSTING SEAL CONDITIONERS, CLEANING AGENTS AND FRICTION MODIFIERS WHILE RESISTING THERMAL BREAKDOWN.

PART#	DESCRIPTION	SIZE
4030H/12	10W-40 HIGH MILEAGE	12/ 1 QT.
4030AN	10W-40 HIGH MILEAGE	55 Gal.



## HEAVY DUTY SUPER GRADE MOTOR OIL

CHAMPION SUPER GRADE HEAVY DUTY MOTOR OIL IS DESIGNED AND LICENSED TO MEET API SERVICE CATEGORY SN SPECIFICATIONS WHERE APPLICABLE. MEETS SAE SPECIFICATIONS FOR FOREIGN AND DOMESTIC OEM WARRANTY REQUIREMENTS.

PART#	DESCRIPTION	SIZE
4033H/12	SAE 30 HEAVY DUTY	12/ 1 QT.



## NON-DETERGENT PURE MINERAL OILS

CHAMPION NON-DETERGENT MOTOR OILS ARE PURE MINERAL OILS ARE RECOMMENDED FOR USE WHERE THE EQUIPMENT MANUFACTURER RECOMMENDS A NON-DETERGENT STRAIGHT MINERAL, OR API SA CLASS MOTOR OIL.

PART#	DESCRIPTION	SIZE
4003U/2	NON-DETERGENT 10W	2/ 2.5 Gal.
4004H/12	NON-DETERGENT 20W	12/ 1 QT.
4004U/2	NON-DETERGENT 20W	2/ 2.5 Gal.
4005H/12	NON-DETERGENT 30W	12/ 1 QT.
4005U/2	NON-DETERGENT 30W	2/ 2.5 Gal.



CONVENTIONAL OILS

# AUTO CHEMICALS

## POWER STEERING FLUID PREMIUM QUALITY FORMULAS

FORMULATED WITH PREMIUM BASE OILS AND BALANCE CHEMISTRY  
MINIMIZES SQUEAL OR SQUAWK IN POWER STEERING SYSTEMS  
PROTECTS PUMPS AND PARTS FROM CORROSION, OXIDATION AND SCUFFING

4182 MEETS AND EXCEEDS SPECIFICATIONS FOR: GM 9985010 SAGINAW,  
DAIMLER/CHRYSLER MS5931F, MS1872, FORD M2C138-CJ, ESW-M2C128,  
DEXRON IID, III, MERCON, CHRYSLER ATF+3, ACURA/HONDA (PRIOR TO 2007)

4186 MEETS AND EXCEEDS SPECIFICATIONS FOR: HONDA/ACURA PN 08206-9002A,  
HONDA PSF-2, HONDA PSF TYPE S AND HONDA PSF TYPE V SYSTEMS.

PART#	DESCRIPTION	SIZE
4182K	POWER STEERING FLUID	12/ 12 OZ.
4182H	POWER STEERING FLUID	12/ 1 QT.
4182N	POWER STEERING FLUID	4/ 1 Gal.
4182AN	POWER STEERING FLUID	55 Gal.
4186K	HONDA PSF FULL-SYN	12/ 12 OZ.



## PRO GRADE CHEMICAL ADDITIVES CLEANERS / TREATMENTS / BOOSTERS

CHAMPION PRO GRADE FUEL INJECTOR CLEANER KEEPS FUEL INJECTOR SYSTEMS  
CLEAN WHILE MAINTAINING PROPER INJECTOR SPRAY PATTERNS. HELPS REMOVE  
WATER AND CONTAMINANTS FROM FUEL SYSTEM.

CHAMPION PRO GRADE 5-MINUTE ENGINE FLUSH IS A QUALITY ENGINE CLEANING  
PRODUCT WITH HIGH SOLVENCY. CLEANS VALVES AND STUBBORN DEPOSITS.

CHAMPION PRO GRADE OCTANE TREATMENT IS FORMULATED TO REDUCE THE NEED  
FOR HIGHER OCTANE FUELS. STABILIZES FUEL WHILE BEING OXYGEN SENSOR SAFE.

CHAMPION PRO GRADE OCTANE BOOSTER SAFELY STOPS KNOCKS, PINGS,  
HESITATION AND RESTORES POWER. BOOSTS OCTANE LEVEL UP TO 15 POINTS.

PART#	DESCRIPTION	SIZE
4275K	FUEL INJECTOR CLEANER	12/ 12 OZ.
4133K	5-MINUTE ENGINE FLUSH	12/ 12 OZ.
4133AN	5-MINUTE ENGINE FLUSH	55 Gal.
4276K	OCTANE TREATMENT	12/ 12 OZ.
4279K	OCTANE BOOSTER	12/ 12 OZ.



# BRAKE FLUIDS

## DOT 3 HEAVY DUTY BRAKE FLUID

EXCELLENT THERMAL AND CHEMICAL STABILITY  
PROVIDES CORROSION AND OXIDATION RESISTANCE  
EXCEEDS SPECIFICATIONS FOR FMVSS No. 116 AND SAE J1703 DOT 3

PART#	DESCRIPTION	SIZE
4057K/12	DOT 3 HD BRAKE FLUID	12/ 12 OZ.
4057H/12	DOT 3 HD BRAKE FLUID	12/ 1 QT.
4057N	DOT 3 HD BRAKE FLUID	4/ 1 Gal.
4057D	DOT 3 HD BRAKE FLUID	5 Gal.
4057AN	DOT 3 HD BRAKE FLUID	55 Gal.



## DOT 4 HEAVY DUTY BRAKE FLUID

PROVIDES ULTIMATE IN HIGH-TEMP PROTECTION  
SUPER HEAVY DUTY FORMULATION RESISTS EFFECTS OF MOISTURE  
EXCEEDS SPECIFICATIONS FOR FMVSS No. 116 AND SAE J1703 DOT 4

PART#	DESCRIPTION	SIZE
4054K/12	DOT 4 HD BRAKE FLUID	12/ 12 OZ.
4054H/12	DOT 4 HD BRAKE FLUID	12/ 1 QT.
4054AN	DOT 4 HD BRAKE FLUID	55 Gal.



## DOT 5 SILICONE BRAKE FLUID

LOW VAPOR PRESSURE ELIMINATES VAPOR LOCK  
EXTREMELY HIGH DRY AND WET BOILING POINTS  
EXCEEDS SPECIFICATIONS FOR FMVSS No. 116 (DOT 5) AND MIL-PRF-46176B

PART#	DESCRIPTION	SIZE
4055K/12	DOT 5 SILICONE BRAKE FLUID	12/ 12 OZ.



## DOT 5.1 HIGH-TEMP BRAKE FLUID

MINIMUM WET BOILING POINT 356° F (180° C).  
BLENDS WITH ALL OTHER APPROVED DOT 3, DOT 4 AND DOT 5.1 BRAKE FLUIDS  
PROVIDES ULTIMATE IN HIGH-TEMP PROTECTION


PART#	DESCRIPTION	SIZE
4056K/12	DOT 5.1 BRAKE FLUID	12/ 12 OZ.



## RACING BRAKE FLUID 600 SERIES - DOT 4

DEVELOPED FOR EXTREME APPLICATIONS  
RACE PROVEN BY TOP-TIER DOMESTIC/INTERNATIONAL TEAMS  
ULTIMATE IN HIGH TEMPERATURE PROTECTION

PART#	DESCRIPTION	SIZE
4059K/12	DOT 4 RACING BRAKE FLUID Typical Boiling Points: Dry 304°C (580°F) Wet 210°C (410°F)	12/ 12 OZ.



BRAKE FLUIDS

# AEROSOLS / CLEANERS

## BRAKE CLEANERS PRO GRADE FORMULAS

4126P REMOVES GREASE, OIL, BRAKE FLUID AND OTHER CONTAMINANTS WITHOUT LEAVING RESIDUE. CANNOT BE SOLD IN CA, NJ OR BILLINGS, MT

4525I 45% VOC. INSTANTLY REMOVES GREASE, OIL, BRAKE FLUID AND OTHER CONTAMINANTS FROM COMPONENTS. CANNOT BE SOLD IN CA, NH OR UT

4221I INSTANTLY REMOVES GREASE, OIL, BRAKE FLUID AND OTHER CONTAMINANTS FROM DISC AND DRUM BRAKE COMPONENTS. 50 STATE FORMULA

4550 REMOVES GREASE, OIL, BRAKE FLUID AND OTHER CONTAMINANTS FROM DISC AND DRUM BRAKE COMPONENTS. 50 STATE FORMULA

PART#	DESCRIPTION	SIZE
4126P	BRAKE CLEANER	12/ 19 OZ.
4525I	N/C BRAKE CLEANER	12/ 15 OZ.
4125D	N/C BRAKE CLEANER (BULK)	5 Gal.
4125AN	N/C BRAKE CLEANER (BULK)	55 Gal.
4221I	FAST DRY BRAKE CLEANER	12/ 12.5 OZ.
4550DC	N/C BRAKE CLEANER (BULK)	5 Gal.
4550AN	N/C BRAKE CLEANER (BULK)	55 Gal.



## CARBURETOR CLEANERS PRO GRADE FORMULAS

4521K 45% VOC. RESTORES CARBURETOR PERFORMANCE BY REMOVING GUM, CARBON DEPOSITS AND DIRT BUILD-UP. CANNOT BE SOLD IN CA, NH OR UT

4121KC RESTORES CARBURETOR PERFORMANCE BY REMOVING GUM, CARBON DEPOSITS AND DIRT BUILD-UP. 50 STATE FORMULA

PART#	DESCRIPTION	SIZE
4521K	PRO GRADE CARB CLEANER	12/ 11 OZ.
4121KC	CARB CLEANER	12/ 13 OZ.



## SPECIALTY AEROSOLS PRO GRADE FORMULAS

4123I REMOVES GREASE, SLUDGE, DIRT AND TAR FROM ENGINE IN MINUTES. MULTI-USE APPLICATIONS. 50 STATE FORMULA

4244M PENETRATES, LUBRICATES AND STOPS RUST. GREAT FOR DRYING WET IGNITION SYSTEMS, SILENCING SQUEAKS AND WILL NOT HARM SURFACES. 50 STATE FORMULA

PART#	DESCRIPTION	SIZE
4123I	ENGINE DEGREASER	12/ 14.5 OZ.
4244M	RX-454 PENETRANT SPRAY	12/ 9 OZ.



# CAR CARE PRODUCTS

## WIPE-R-CLEAN GLASS CLEANER STREAKLESS FORMULA

EXCELLENT PRODUCT FOR CLEANING GLASS AND OTHER SURFACES  
POWERFUL CLEANER THAT IS SAFE AND EASY TO USE  
DISSOLVES SMUDGES, FILM, SCUM, SMEARS AND OTHER SOIL

PART#	DESCRIPTION	SIZE
4303P	STREAKLESS GLASS CLEANER	12/ 19 OZ.



## TIRE SHINE PROTECTANT FOAM

INTENSE FOAM ACTIVATES ON CONTACT, FLOATING DIRT AWAY  
CLEANS, SHINES, AND PROTECTS TIRES  
DESIGNED TO HELP RESTORE THE NATURAL BLACK SHINE

PART#	DESCRIPTION	SIZE
4522I	TIRE SHINE FOAM	12/ 15 OZ.



## SPRINT WAX HIGH GLOSS FORMULA

CLEANS AND SHINES GLASS, CHROME, PAINT AND OTHER SURFACES  
IDEAL PRODUCT FOR LAMINATED VINYL DECALS  
NO PREWASH NEEDED - QUICK AND EASY

PART#	DESCRIPTION	SIZE
4301S	SPRINT WAX	12/ 22 OZ.



CAR CARE PRODUCTS

# TRANSMISSION FLUIDS

## UNIVERSAL ATF MULTI-FUNCTIONAL FLUID

EXCELLENT CLEANLINESS AND RESISTANCE TO SLUDGE AND VARNISH  
ANTI-WEAR PERFORMANCE AND FRICTION MODIFICATION

RECOMMENDED FOR USE IN ALL TRANSMISSIONS REQUIRING THE  
PERFORMANCE REQUIREMENTS OF FORD MERCON®, GM DEXRON® III,  
ALLISON C-4, CAT TO-2, FORD TYPE H, FORD TASA AND CJ SPECIFICATIONS

PART#	DESCRIPTION	SIZE
4355H	UNIVERSAL ATF FLUID	12/ 1 QT.
4355N	UNIVERSAL ATF FLUID	4/ 1 Gal.
4355U	UNIVERSAL ATF FLUID	2/ 2.5 Gal.
4355AN	UNIVERSAL ATF FLUID	55 Gal.



## GLOBALTRANS SYNTHETIC ATF MULTI-VEHICLE FLUID

100% SYNTHETIC FORMULA FOR SUPERIOR RESISTANCE TO OXIDATION  
HIGHLY SHEAR STABLE COLD FLOW VISCOSITY ADDITIVE

EXCEEDS THE PERFORMANCE REQUIREMENTS OF MOST EUROPEAN, ASIAN  
AND NORTH AMERICAN OEMS

PART#	DESCRIPTION	SIZE
4357H/6	GLOBALTRANS ATF FLUID	6/ 1 QT.
4357N	GLOBALTRANS ATF FLUID	4/ 1 Gal.
4357D	GLOBALTRANS ATF FLUID	5 Gal.
4357AN	GLOBALTRANS ATF FLUID	55 Gal.



## SPECIALTY TRANSMISSION FLUIDS CVT / TO-4 / SUPER GRADE TORQUE FLUID

4354 PURPOSE BUILT FOR THE DEMANDS OF BELT AND CHAIN TYPE VARIABLES  
BALANCED ADDITIVE CHEMISTRY PACKAGE

4313/4314 SUPERIOR HYDRAULIC, TRANSMISSION AND FINAL DRIVE LUBRICANT  
PURPOSE BUILT FOR CATERPILLAR EQUIPMENT WHERE TO-4 IS SPECIFIED

4287 HYDROSTATIC TRANSMISSION FLUID USED IN MOST HYDROSTATIC  
TRANSMISSIONS. LOW VISCOSITY AND LOW POUR POINT.

PART#	DESCRIPTION	SIZE
4354H/6	CVT FLUID	6/ 1 QT.
4354D	CVT FLUID	5 Gal.
4313D	TO-4 TRANS FLUID 10	5 Gal.
4313AN	TO-4 TRANS FLUID 10	55 Gal.
4345D	TO-4 TRANS FLUID 30	5 Gal.
4345AN	TO-4 TRANS FLUID 30	55 Gal.
4287U	SG 10/40 TORQUE FLUID	2/ 2.5 Gal.
4287AN	SG 10/40 TORQUE FLUID	55 Gal.



# GEAR LUBRICANTS

## HTS SYNTHETIC GEAR LUBRICANTS TOP-TIER API GL-5 / CD 50

FULL SYNTHETIC FORMULA MEETS THE CHALLENGES OF MODERN DIFFERENTIALS  
RECOMMENDED FOR ANY APPLICATION SPECIFYING API GL-5 OR API GL-4

PART#	DESCRIPTION	SIZE
4314H	SYNTHETIC 75W-90 GL-5	12/ 1 Qt.
4314D	SYNTHETIC 75W-90 GL-5	5 Gal.
4314AN	SYNTHETIC 75W-90 GL-5	55 Gal.
4315D	SYNTHETIC 80W-140 GL-5	5 Gal.
4315AN	SYNTHETIC 80W-140 GL-5	55 Gal.
4317D	SYNTHETIC 75W-140 GL-5	5 Gal.
4316D	SYNTHETIC CD 50	5 Gal.
4316AN	SYNTHETIC CD 50	55 Gal.



## HEAVY DUTY GEAR LUBRICANTS ALL-PURPOSE API GL-5

PROVIDES EXCEPTIONAL PROTECTION UNDER EXTREME CONDITIONS  
RECOMMENDED FOR ANY APPLICATION SPECIFYING API GL-5 OR API GL-4

PART#	DESCRIPTION	SIZE
4120H	HEAVY DUTY 80W-90 GL-5	12/ 1 Qt.
4120N/4	HEAVY DUTY 80W-90 GL-5	4/ 1 Gal.
4120U	HEAVY DUTY 80W-90 GL-5	2/ 2.5 Gal.
4120D	HEAVY DUTY 80W-90 GL-5	5 Gal.
4120AN	HEAVY DUTY 80W-90 GL-5	55 Gal.
4157U	HEAVY DUTY 85W-140 GL-5	2/ 2.5 Gal.
4157D	HEAVY DUTY 85W-140 GL-5	5 Gal.
4157AN	HEAVY DUTY 85W-140 GL-5	55 Gal.



## SYNGOLD® EXTREME PRESSURE GEAR LUBES SYNTHETIC FORMULA

DELIVERS EXCELLENT LUBRICATION PERFORMANCE FOR INDUSTRIAL GEAR BOXES  
MEETS AND EXCEEDS AIST AND AGMA 9005 EP SPECIFICATIONS

PART#	DESCRIPTION	SIZE
4131AN	SYNGOLD EPG ISO 68	55 Gal.
4094AN	SYNGOLD EPG ISO 100	55 Gal.
4095AN	SYNGOLD EPG ISO 150	55 Gal.
4106AN	SYNGOLD EPG ISO 220	55 Gal.
4098AN	SYNGOLD EPG ISO 320	55 Gal.
4099AN	SYNGOLD EPG ISO 460	55 Gal.
4102AN	SYNGOLD EPG ISO 680	55 Gal.



## INDUSTRIAL EXTREME PRESSURE GEAR LUBES HIGHLY PURIFIED

HIGH QUALITY, EXTREME PRESSURE GEAR LUBRICANT FOR INDUSTRIAL APPLICATIONS  
MEETS AND EXCEEDS AIST AND AGMA 9005 EP SPECIFICATIONS

PART#	DESCRIPTION	SIZE
4068AN	INDUSTRIAL EPG ISO 68	55 Gal.
4069D	INDUSTRIAL EPG ISO 150	5 Gal.
4069AN	INDUSTRIAL EPG ISO 150	55 Gal.
4070D	INDUSTRIAL EPG ISO 220	5 Gal.
4070AN	INDUSTRIAL EPG ISO 220	55 Gal.
4071D	INDUSTRIAL EPG ISO 320	5 Gal.
4071AN	INDUSTRIAL EPG ISO 320	55 Gal.
4076AN	INDUSTRIAL EPG ISO 460	55 Gal.
4077AN	INDUSTRIAL EPG ISO 680	55 Gal.



## SPECIALTY FLEET GEAR LUBRICANTS HIGHLY PURIFIED

PROVIDES HIGH THERMAL AND OXIDATION STABILITY  
PURPOSE BUILT FOR HEAVY DUTY GEAR BOXES AND TRANSMISSIONS  
BEST IN CLASS CLEAN-GEAR CHEMISTRY EXCEEDS MT-1, GL-5 AND GL-4

PART#	DESCRIPTION	SIZE
4413AN	SYNTHETIC OE FLEET 75W-90	55 Gal.
4155AN	HEAVY DUTY FLEET 85W-90	55 Gal.
4156AN	HEAVY DUTY FLEET 85W-140	55 Gal.

GEAR LUBRICANTS

# GREASE PRODUCTS

## HIGH TEMP LITHIUM GREASES

### NLGI #2

POLY 7® IS AN ALL WEATHER MULTI-PURPOSE GREASE PURPOSE BUILT FOR AUTOMOTIVE WHEEL BEARING AND CHASSIS LUBRICATION (550°F Dropping Point)

POLY 7® RED IS A HIGH TEMP, EXTREME PRESSURE GREASE WITH SUPER TACK APPLICATION (550°F Dropping Point)

MOLY EP GREASE IS A HIGH QUALITY LITHIUM COMPLEX GREASE THAT PROVIDES LOW FRICTION AND WATER WASHOUT RESISTANCE

AMBER LITHIUM HAS GOOD LOAD CARRYING, RUST AND OXIDATION PROTECTION AND CORROSION RESISTANT CHARACTERISTICS

PART#	DESCRIPTION	SIZE
4050T	POLY 7® HIGH-TEMP GREASE	40/ 14 Oz.
4050D	POLY 7® HIGH-TEMP GREASE	35 Lb.
4050AN	POLY 7® HIGH-TEMP GREASE	400 Lb.
4053T	POLY 7® RED TACKY GREASE	40/ 14 Oz.
4053D	POLY 7® RED TACKY GREASE	35 Lb.
4053AN	POLY 7® RED TACKY GREASE	400 Lb.
4052T	AMBER LITHIUM GREASE	40/ 14 Oz.
4052D	AMBER LITHIUM GREASE	35 Lb.
4052AN	AMBER LITHIUM GREASE	400 Lb.
4051T	MOLY EP GREASE	40/ 14 Oz.
4051D	MOLY EP GREASE	35 Lb.
4051AN	MOLY EP GREASE	400 Lb.



## DISC BRAKE WHEEL BEARING GREASE EXTREME PRESSURE

LITHIUM COMPLEX BASE GREASE FORMULATED FOR SEVERE REQUIREMENTS.

THIS GREASE IS CAPABLE OF OPERATIONS FROM -40°F TO 350°F.

PART#	DESCRIPTION	SIZE
4149I	WHEEL BEARING GREASE	12/ 1 Lb.



## "00" MULTI-PURPOSE POUR GREASE EXTREME PRESSURE NLGI#00

EXCELLENT EXTREME PRESSURE LITHIUM BASED #00 GREASE

PROVIDES PROTECTION AGAINST RUST, CORROSION AND SCUFFING.

PART#	DESCRIPTION	SIZE
4049H	"00" EP POUR GREASE	12/ 1 Qt.



# SPECIALTY PRODUCTS

## AIR-LOK TIRE SEALANTS/INFLATORS HEAVY DUTY FORMULATIONS

DESIGNED TO AID IN THE REPAIR AND PREVENTION OF FLAT TIRES  
TPMS SAFE - 50 STATE FORMULA

PART#	DESCRIPTION	SIZE
4086I	TIRE SEALANT	12/ 16 Oz.
4086N/4	TIRE SEALANT	4/ 1 Gal.
4086D	TIRE SEALANT	5 Gal.
4086AN	TIRE SEALANT	55 Gal.
4086K	TIRE INFLATOR (NOZZLE)	12/ 12 Oz.
4086KH	TIRE INFLATOR (HOSE)	12/ 12 Oz.



## HYDRAULIC OIL ADDITIVE ANTI-CHATTER

PURPOSE BUILT TO REDUCE NOISE AND CONTROL STICK-SLIP  
PROFESSIONAL GRADE LOW FRICTION FORMULA

PART#	DESCRIPTION	SIZE
4177E	HYDRAULIC OIL ADDITIVE	6/ 48 Oz.

## SNOW PLOW HYDRAULIC OIL FULL SYNTHETIC PRO GRADE

PURPOSE BUILT FOR EXTREME COLD FLOW OPERATIONS  
EXTENDED FLUID LIFE FOR LONGER DRAIN INTERVALS

PART#	DESCRIPTION	SIZE
4013H	SYNTHETIC SNOW PLOW OIL	12/ 1 Qt.
4013N	SYNTHETIC SNOW PLOW OIL	4/ 1 Gal.



## CHARCOAL LIGHTER FLUID PREMIUM ODORLESS FLUID

COMPLIES WITH ALL VOC STANDARDS, INCLUDING SCAQMD RULE 1174  
GREAT FOR USE WITH OUTDOOR FIRE PITS, BBQ GRILLS AND CAMP FIRES

PART#	DESCRIPTION	SIZE
4206H	FIRE-BRITE LIGHTER FLUID	12/ 1 Qt.

## BAR & CHAIN LUBRICANTS ANTI-RUST BLEND

FORMULATED TO HELP REMOVE DIRT AND CHIPS FROM BARS  
PROVIDES MAXIMUM FILM ADHESION

PART#	DESCRIPTION	SIZE
4087H	BAR & CHAIN LUBRICANT	12/ 1 Qt.
4087N	BAR & CHAIN LUBRICANT	4/ 1 Gal.
4087AN	BAR & CHAIN LUBRICANT	55 Gal.

## INDUSTRIAL GRADE CLEANER/BRIGHTENER/TRUCK WASH HEAVY DUTY FORMULAS

PURPLE LIGHTNING/DEGREASER WORKS GREAT ON OIL, FILM, GREASE, GRIME, DIRT AND SOILS  
ALUMINUM BRIGHTENER EFFECTIVELY LEAVES ALUMINUM CLEAN AND BRIGHT  
HEAVY DUTY TRUCK WASH IS DESIGNED TO REMOVE TOUGH EXHAUST DEPOSITS AND FILM

PART#	DESCRIPTION	SIZE
4143D	PURPLE LIGHTNING CLEANER	5 Gal.
4136D	ALUMINUM BRIGHTENER	5 Gal.
4134D	HD TRUCK WASH	5 Gal.

## SOLVENTS (MINERAL SPIRITS) GENERAL PURPOSE FORMULAS

VERY GOOD SOLVENCY AND NARROW RANGE OF VOLATILITY  
SAFE AND EFFECTIVE PRODUCT FOR INDUSTRIAL CLEANING

PART#	DESCRIPTION	SIZE
4117D	SOLVENT (105° F FLASH)	5 Gal.
4117AN	SOLVENT (105° F FLASH)	55 Gal.
4114D	SOLVENT (180° F FLASH)	5 Gal.
4114AN	SOLVENT (180° F FLASH)	55 Gal.



SPECIALTY PRODUCTS

# INDUSTRIAL FLUIDS

## INDUSTRIAL COMPRESSOR OILS HIGH PERFORMANCE FORMULAS

HEAVY DUTY COMPRESSOR OILS ARE DESIGNED FOR USE IN SINGLE-STAGE RECIPROCATING COMPRESSORS, TWO-STAGE RECIPROCATING COMPRESSORS, MULTI-STAGE RECIPROCATING COMPRESSORS AND ROTARY SCREW COMPRESSORS

SYNTINEL PREMIUM SYNTHETIC COMPRESSOR OILS ARE PREMIUM FULL SYNTHETIC FLUIDS DESIGNED FOR HIGH PERFORMANCE AIR COMPRESSORS. UTILIZES ADVANCED SYNTHETIC TECHNOLOGY AND PREMIUM ADDITIVES

PART#	DESCRIPTION	SIZE
4139H/12	HD COMPRESSOR OIL	12/ 1 Qt.
4139AN	HD COMPRESSOR OIL	55 Gal.
4510D	PCL COMPRESSOR 32 FULL-SYN	5 Gal.
4510AN	PCL COMPRESSOR 32 FULL-SYN	55 Gal.
4511D	PCL COMPRESSOR 46 FULL-SYN	5 Gal.
4511AN	PCL COMPRESSOR 46 FULL-SYN	55 Gal.
4512D	PCL COMPRESSOR 68 FULL-SYN	5 Gal.
4512AN	PCL COMPRESSOR 68 FULL-SYN	55 Gal.



## INDUSTRIAL SPECIALTY OILS PROFESSIONAL GRADE FORMULAS

WIDE RANGE OF INDUSTRIAL OILS PURPOSE BUILT FOR MACHINERY AND INDUSTRIAL APPLICATIONS

PART#	DESCRIPTION	SIZE
4239AN	SUPER GRADE WAYLUBE 68	55 Gal.
4241AN	SUPER GRADE WAYLUBE 220	55 Gal.
4218AN	HEAT TRANSFER OIL 32	55 Gal.
4223AN	HEAT TRANSFER OIL 22	55 Gal.
4196AN	SUPER GRADE CUTTING OIL	55 Gal.
4194AN	SOLUBLE CUTTING OIL	55 Gal.
4251AN	ROCK DRILL OIL 220	55 Gal.
4067V/12	AIR TOOL OIL - LIGHT	12/ 4 Oz.
4103AN	PREMIUM FORM OIL	55 Gal.





# HYDRAULIC FLUIDS

## SUPER GRADE AW/RO HYDRAULIC FLUIDS 5,000 HOUR TYPICAL FLUID LIFE

DESIGNED FOR USE IN MODERN HIGH PERFORMANCE HYDRAULIC COMPONENTS  
PROVIDES EXCELLENT FILTERABILITY AND OXIDATION RESISTANCE

PART#	DESCRIPTION	SIZE
4245D	SUPER GRADE AW/RO 32	5 Gal.
4245AN	SUPER GRADE AW/RO 32	55 Gal.
4180D	SUPER GRADE AW/RO 46	5 Gal.
4180AN	SUPER GRADE AW/RO 46	55 Gal.
4181D	SUPER GRADE AW/RO 68	5 Gal.
4181AN	SUPER GRADE AW/RO 68	55 Gal.
4178AN	SUPER GRADE AW/RO 100	55 Gal.
4212AN	SUPER GRADE AW/RO 150	55 Gal.

## QUANTUM AW/RO HYDRAULIC FLUIDS 7,000 HOUR TYPICAL FLUID LIFE

INCLUDES ANTI-WEAR, ANTI-RUST AND ANTI-OXIDATION ADDITIVES  
PROVIDES EXCELLENT FILTERABILITY AND OXIDATION RESISTANCE

PART#	DESCRIPTION	SIZE
4318AN	QUANTUM AW/RO 32	55 Gal.
4319AN	QUANTUM AW/RO 46	55 Gal.
4320D	QUANTUM AW/RO 68	5 Gal.
4320AN	QUANTUM AW/RO 68	55 Gal.
4327AN	QUANTUM AW/RO 100	55 Gal.
4329AN	QUANTUM AW/RO 150	55 Gal.

## SYNTINEL ESL AW/RO HYDRAULIC FLUIDS 10,000 HOUR TYPICAL FLUID LIFE

EXTREMELY STABLE SYNTHETIC BASE OILS AND BOOSTED ADDITIVES  
DESIGNED FOR MAXIMUM PROTECTION AT EXTREME TEMPERATURES

PART#	DESCRIPTION	SIZE
4328AN	SYNTINEL ESL UL 15	55 Gal.
4331AN	SYNTINEL ESL UL 32	55 Gal.
4333D	SYNTINEL ESL UL 46	5 Gal.
4333AN	SYNTINEL ESL UL 46	55 Gal.
4335AN	SYNTINEL ESL UL 68	55 Gal.
4337AN	SYNTINEL ESL UL 150	55 Gal.

## QUANTUM ALL SEASON AW/RO FLUIDS 7000 HOUR TYPICAL FLUID LIFE

IMPROVED OXIDATION RESISTANCE AND VISCOSITY RETENTION  
PROVIDES EXCELLENT FILTERABILITY AND OXIDATION RESISTANCE

PART#	DESCRIPTION	SIZE
4266D	QUANTUM A/S AW/RO 3200	5 Gal.
4266AN	QUANTUM A/S AW/RO 3200	55 Gal.
4267D	QUANTUM A/S AW/RO 4600	5 Gal.
4267AN	QUANTUM A/S AW/RO 4600	55 Gal.
4268D	QUANTUM A/S AW/RO 6800	5 Gal.
4268AN	QUANTUM A/S AW/RO 6800	55 Gal.

## QUANTUM ASHLESS TURBINE R/O FLUIDS EXTRA LONG LIFE FORMULATIONS

EXTENDED OPERATING LIFE FOR REDUCED DOWNTIME  
PROVIDES EXCELLENT FILTERABILITY AND OXIDATION RESISTANCE

PART#	DESCRIPTION	SIZE
4321AN	QUANTUM ASHLESS R/O 32	55 Gal.
4323AN	QUANTUM ASHLESS R/O 46	55 Gal.
4322AN	QUANTUM ASHLESS R/O 68	55 Gal.
4326AN	QUANTUM ASHLESS R/O 220	55 Gal.



HYDRAULIC FLUIDS

# TRACTOR FLUIDS

## 4000® PREMIUM TRACTOR HYDRAULIC FLUID MEETS AND EXCEEDS J20C

4000® UTTO IS THE MOST UNIVERSALLY DIVERSE FLUID AVAILABLE FOR USE IN FARM TRACTORS, IMPLEMENTS, FORK LIFT TRUCKS, PAVEMENT ROLLERS, LOADERS, BACKHOES, BULLDOZERS, DITCHERS, 4X4 UTVs WITH WET BRAKE DIFFERENTIALS AND LAWN TRACTORS AND MOWERS.

DELIVERS EXCEPTIONAL PERFORMANCE AND HONORS MORE WARRANTIES THAN ANY OTHER TRACTOR HYDRAULIC FLUID ON THE MARKET.

PART#	DESCRIPTION	SIZE
4000N/4	4000® TRACTOR FLUID	4/ 1 Gal.
4000S/3	4000® TRACTOR FLUID	3/ 2 Gal.
4000U/2	4000® TRACTOR FLUID	2/ 2.5 Gal.
4000D	4000® TRACTOR FLUID	5 Gal.
4000AN	4000® TRACTOR FLUID	55 Gal.



**4000®**  
-PREMIUM-  
UNIVERSAL TRACTOR  
HYDRAULIC FLUID

## 4000® ULTRA TRACTOR HYDRAULIC FLUID MEETS AND EXCEEDS J20C/D

4000® ULTRA UTTO IS A FULL SYNTHETIC HIGH EFFICIENCY, ALL-WEATHER TRANSMISSION/HYDRAULIC FLUID DESIGNED FOR TRACTORS, DIGGERS, EXCAVATORS AND VOCATIONAL EQUIPMENT. BACKED BY PREMIUM BASE OILS

PART#	DESCRIPTION	SIZE
4001U/2	4000® ULTRA UTTO FLUID	2/ 2.5 Gal.
4001AN	4000® ULTRA UTTO FLUID	55 Gal.



**4000®**  
**ULTRA**

EXTREME PROTECTION  
EXTREME PERFORMANCE

TRACTOR FLUIDS

# 4000<sup>®</sup>

**-PREMIUM-  
UNIVERSAL TRACTOR  
HYDRAULIC FLUID**

**“KEEPING FARMERS  
IN THE FIELD”**

**PROTECT YOUR  
INVESTMENT**



# SEASONAL PRODUCTS

## ANTIFREEZE TOP-TIER FORMULAS

4116 - CHAMPION 50/50 UNIVERSAL PREDILUTED EXTENDED LIFE ANTIFREEZE & COOLANT IS FORMULATED FOR USE IN ALL MAKES AND MODELS OF CARS AND LIGHT DUTY TRUCKS. PROTECTS UP TO 5 YEARS / 150,000 MILES

4118 - CHAMPION ANTIFREEZE & COOLANT IS A CONVENTIONAL GREEN COLORED, LOW SILICATE ANTIFREEZE FORMULATED FOR USE IN AUTOMOTIVE, LIGHT DUTY AND HEAVY DUTY APPLICATIONS

4119 - CHAMPION UNIVERSAL ANTIFREEZE & COOLANT IS A RECOMMENDED, COMPATIBLE AND FORMULATED FOR USE WITH ANY ANTIFREEZE/COOLANT IN ANY VEHICLE WITH ALUMINUM AND OTHER ENGINE METALS

PART#	DESCRIPTION	SIZE
4116F	50/50 UNIVERSAL EX-LIFE	6/ 1 Gal.
4116AN	50/50 UNIVERSAL EX-LIFE	55 Gal.
4118F	PERMANENT ANTIFREEZE	6/ 1 Gal.
4116AN	PERMANENT ANTIFREEZE	55 Gal.
4119F	UNIVERSAL ANTIFREEZE	6/ 1 Gal.
4119AN	UNIVERSAL ANTIFREEZE	55 Gal.



## AIR BRAKE ANTIFREEZE CONDITIONER AND RUSTGUARD

RECOMMENDED FOR USE IN AIR BRAKE LINES TO PREVENT LINE FREEZE-UPS, AND TO ABSORB MOISTURE IN THE SYSTEM

PART#	DESCRIPTION	SIZE
4137H/12	AIR BRAKE ANTIFREEZE	12/ 1 Qt.
4137N/4	AIR BRAKE ANTIFREEZE	4/ 1 Gal.
4137AP	AIR BRAKE ANTIFREEZE	55 Gal.



## RV ANTIFREEZE TOP-TIER PROTECTION

UP TO -50° F BURST PROTECTION. CONTAINS CORROSION INHIBITOR ADDITIVE TECHNOLOGY FOR EXTENDED PROTECTION

PART#	DESCRIPTION	SIZE
CBRVAFAN	-50 RV ANTIFREEZE	55 Gal.
CBRVAFT	-50 RV ANTIFREEZE	250 Gal.

## WINDSHIELD WASHER FLUID HIGH QUALITY FORMULA

PROTECTS WASHER EQUIPMENT TO TEMPERATURES AS LOW AS -20°F TO COVER ALMOST ANY WEATHER CONDITION.

PART#	DESCRIPTION	SIZE
4105F	-20 WASHER PRE-MIX	6/ 1 Gal.
4105AP	-20 WASHER PRE-MIX	55 Gal.
4089AP	WASHER CONCENTRATE	55 Gal.

## STARTING FLUID PROFESSIONAL GRADE

WORKS GREAT ON GAS OR DIESEL ENGINES. ALLOWS FOR FASTER STARTS AND REDUCES WEAR ON BATTERIES

PART#	DESCRIPTION	SIZE
4580K/12	80% ETHER STARTING FLUID	12/ 11 Oz.
4590K/12	50% ETHER STARTING FLUID	12/ 11 Oz.

## DE-ICER SAFE TO USE

PROFESSIONAL GRADE FORMULA MELTS ICE FAST. WORKS GREAT ON FROZEN LOCKS, ICED WINDSHIELDS AND ICED WIPERS

PART#	DESCRIPTION	SIZE
4300K/12	PRO GRADE DE-ICER	12/ 11 Oz.



# MARKETING/APPAREL

## CHAMPION FLAG HAT

PART#	DESCRIPTION	SIZE
BCHAT	CHAMPION FLAG HAT	FITS ALL



## CHAMPION RACING HAT

PART#	DESCRIPTION	SIZE
SRHAT	CHAMPION RACING HAT	FITS ALL



## CHAMPION APPAREL

PART#	DESCRIPTION	SIZE
BCSHIRT	BLACK CHAMPION T-SHIRT	S,M,L,XL,2X,3X
BRSHIRT	BLACK RACING T-SHIRT	S,M,L,XL,2X,3X
BCFLEECE	BLACK CHAMPION FLEECE	S,M,L,XL,2X,3X

## CHAMPION OIL RAGS

PART#	DESCRIPTION	SIZE
WRRAG	CHAMPION OIL RAG (WARM RED)	8x8"
BLRAG	CHAMPION OIL RAG (BLUE)	8x8"

## CHAMPION DECALS

PART#	DESCRIPTION	SIZE
RML904	RACING OIL SHEET (L-R) SM	10x7.75"
RML909	CHAMPION FLAG	4.25"
RML910	BLUE FLAME	7x5.125"
RML914	RACING OIL SMALL	4"
RML913	RACING OIL SHEET (L-R) LG	12.25x15.75"
RML915	CHAMPION FLAG	7"
RML1920	CHAMPION FLAG (WARM RED)	7"
RML1921	CHAMPION FLAG (NMCA)	7"
RML1922	MODERN MUSCLE	6"
RML1923	RACING OIL NOSE WING	18"

## CHAMPION CATALOGS

PART#	DESCRIPTION	SIZE
CHCAT	FULL PRODUCT CATALOG	8.5x11"
HDBROC	HEAVY DUTY BROCHURE	8.5x11"
INDBROC	INDUSTRIAL BROCHURE	8.5x11"
MMBROC	MODERN MUSCLE BROCHURE	8.5x11"



## CHAMPION BANNERS

PART#	DESCRIPTION	SIZE
CHBAN1	CHAMPION FLAG BANNER	2x4
CHBAN2	AVAILABLE HERE BANNER	2x4
CHBAN3	CHAMPION FLAG BANNER	4x6
RCBAN1	RACING OIL BANNER	2x4
RCBAN2	RACING OIL BANNER	4x6



OTHER STYLE BANNERS AVAILABLE UPON REQUEST

MARKETING/APPAREL

# GALLERY

