



WARNING LIGHTING





ESG[®]

ECCO SAFETY GROUP

For 45 years, ECCO Safety Group (ESG) has designed and manufactured some of the world's most effective and innovative visual and audible warning equipment for commercial and public safety vehicles, providing superior protection and enhanced safety both on job sites and out on the road.


Through our primary brands, ECCO and Code 3, ESG serves thousands of OEM and private label, fleet and aftermarket customers in a range of industries. ESG has facilities in the Americas, Europe, Asia and Australia and a portfolio of the most respected brands in the industry. While we have reached global success, at our core we are committed to providing superior protection and enhanced safety to all of our customers.






ECCO catalogs


We know that you are busy, and when it comes to your business, efficiency is key. The new ECCO catalog helps you easily identify the products you need to get the job done. For those looking for the complete package, we have product category catalogs available. It's your complete guide to upfitting your work vehicles to ensure an optimal amount of safety.

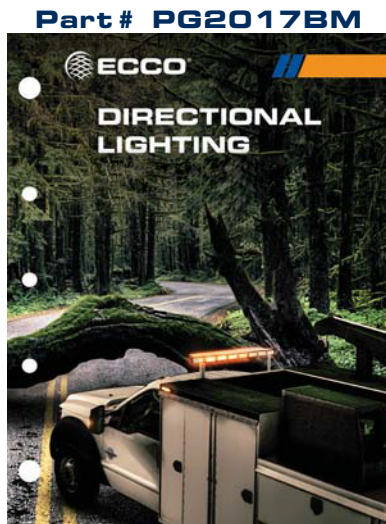

DIRECTIONALS & SAFETY DIRECTORS

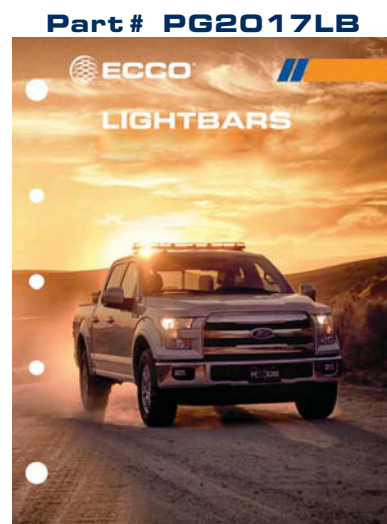

LIGHTBARS

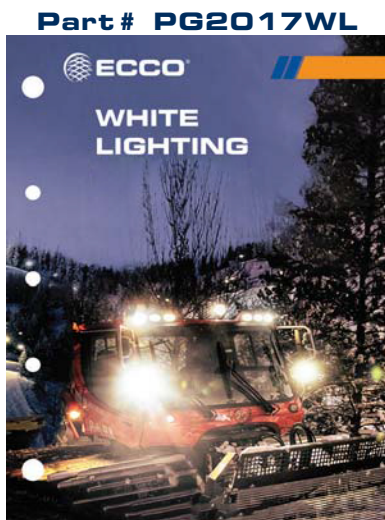

WORKLAMPS, UTILITY BARS & INTERIOR LIGHTING



ALARMS & CAMERA SYSTEMS



contents guide



Beacons



Minibars



Domes & Lenses



Guards & Covers



Cables, Plugs



Mounting Hardware



Part Number Index



The Dirt Magazine

symbol guide



Part Number



Color



Type



Volts



Amps



Flashes per minute



Joules



Watts



Mounting



Approvals



Warranty





certifications

Certifications & Standards

SAE Class (I, II & III) Indicates compliance with the relevant section of the Society of Automotive Engineers' general requirements for warning lights. Specific class ratings indicate the intensity of light produced, Class I being most powerful.


California Title 13 Indicates compliance with California vehicle code requirements.

R65 Indicates compliance with European regulations specifically related to vehicle warning lights.

CE Indicates compliance with general mandatory European product safety regulations (electromagnetic compatibility).

R10 Indicates compliance with mandatory European product safety regulations specifically related to electrical products for on-road vehicles (electromagnetic compatibility).

IP Indicates level of environmental protection provided by a product enclosure as defined by the European Committee for Electro Technical Standardization. Ingress Protection (IP) ratings are stated as two numbers, the first number relates to protection from solid materials (1-6), and the second number to protection from liquids (1-8). The higher the number, the greater the protection.

UL /  Indicates compliance with a relevant electrical product safety standard as defined by Underwriters Laboratories (UL). UL recognized products are suitable for use on electrically powered vehicles that are themselves covered by a UL standard (i.e. forklifts).

AMECA Indicates 3rd party, independent verification of SAE compliance by the Automotive Manufacturers Equipment Compliance Agency.

RoHS Indicates compliance with European directive restricting the use of hazardous substances such as lead, mercury, cadmium, hexavalent chromium, and six other substances.



RELIABILITY....UPGRADED

LED OPTICS GIVE ECCO'S POPULAR BEACON AN INTENSE WARNING SIGNAL IN A LOW-MAINTENANCE, LONG-LASTING FORM.





beacons LED

7660 RotoLED™ **NEW**

SAE Class I LED Hybrid



- # **7660A**
- C Amber
- V 12-24
- A 2.1
- F 125
- X 3 Bolt
- ⊗ SAE J845 Class I, CE, R10, IP67
- ⊕ Cal. Title 13 (A & CA only), RoHS
- ⊕ 5 Year



- # **7660A-VM**
- C Amber
- V 12-24
- A 2.1
- F 125
- X Vacuum-Magnet
- ⊗ SAE J845 Class I, CE, R10, IP67
- ⊕ Cal. Title 13 (A & CA only), RoHS
- ⊕ 5 Year



No gears, brushes, or bulbs to wear out
LED optics produce intense rotating beam

UV hard coated lens reduces abrasion, cracking and fading

DIMENSIONS

6.2 [156] H x 6.5 [165] Diameter

AVAILABLE COLORS

Amber, Blue, Clear, Green & Red



CA models = clear lens / amber illumination

7960 Pulse™

SAE Class I LED



- # **7960A**
- C Amber
- V 12-24
- A 3.7
- X 3 Bolt / 1" Pipe
- ⊗ SAE J845 Class I, CE, R10
- ⊕ IP56, RoHS
- ⊕ 5 Year



- # **7960A-VM**
- C Amber
- V 12-24
- A 3.7
- X Vacuum-Magnet
- ⊗ SAE J845 Class I, CE, R10, RoHS
- ⊕ 5 Year



11 flash patterns

Hi/Lo intensity

Encapsulated electronics for severe vibration applications

DIMENSIONS

5.6 [142] H x 6.5 [165] Diameter

AVAILABLE COLORS

Amber, Blue, Clear & Red



CA models = clear lens / amber illumination

LENSES

R7960LX

Replace 'X' with A=Amber, B=Blue, C=Clear, R=Red



beacons LED



Compact, low-profile beacon

8 flash patterns, including simulated rotate mode

Synchronization capable

EB7180

SAE Class I LED



EB7180A

- # Amber
- C 12-24
- V 6.2
- A 4 Bolt / 1" Pipe
- X SAE J845 Class I, Cal. Title 13,
- ⊕ R10, IP55, AMECA
- 🕒 3 Year



EB7180A-VM

- Amber
- 12-24
- 6.2
- Vacuum-Magnet
- SAE J845 Class I, Cal. Title 13,
- R10, IP55, AMECA
- 3 Year

DIMENSIONS

2.3 [58] H x 6.5 [165] W x 6.5 [165] D

AVAILABLE COLORS

Amber, Clear/Amber & Clear/Clear



CA models = clear lens / amber illumination

CC models = clear lens / clear illumination

EB7185

SAE Class I Dual-Color LED



Dual-color warning

24 flash patterns, including simulated rotate mode

Hi/Lo intensity, synchronization capable



EB7185AAA

- C Amber
- V 12-24
- A 8.6
- X 4 Bolt / 1" Pipe
- ⊕ SAE J845 Class I, Cal. Title 13,
- R10, IP55, AMECA, RoHS
- 🕒 3 Year



EB7185AAA-VM

- Amber
- 12-24
- 8.6
- Vacuum-Magnet
- SAE J845 Class I, Cal. Title 13,
- R10, IP55, AMECA
- 3 Year

DIMENSIONS

3.3 [84] H x 6.5 [165] W x 6.5 [165] D

AVAILABLE COLORS

Amber, Clear/Amber/Amber, Clear/Amber/Clear, Clear/Clear/Clear, Clear/Amber/Blue, & Clear/Amber/Green



CAA models = clear lens / amber illumination

CAB models = clear lens / amber and blue illumination

CAC models = clear lens / amber and clear illumination

CAG models = clear lens / amber and green illumination

CCC models = clear lens / clear illumination



beacons LED

7460 Profile™

SAE Class I LED



7460A

- C Amber
- V 12-36
- A 3.6
- F 80 FPMx8
- X 3 Bolt / 1" Pipe
- ⊙ SAE J845 Class I, CE, IP67
- Ⓟ 5 Year

7460A-VM

- C Amber
- V 12-24
- A 3.6
- F 80 FPMx8
- X Vacuum-Magnet
- ⊙ SAE J845 Class I, CE, IP67
- Ⓟ 5 Year

DIMENSIONS

3.1 [79] H x 6.4 [163] Diameter

AVAILABLE COLORS

Amber, Blue, Clear, Green & Red



CA models = clear lens / amber illumination



Compact, low-profile beacon

Reflective LED module

Overhead heatsink design provides aesthetic pipe mounting

7160 Reflex®

SAE Class I LED



7160A

- C Amber
- V 12-24
- A 2.0
- X 3 Bolt / 1" Pipe
- ⊙ SAE J845 Class I, Cal. Title 13, CE, R10 IP66, RoHS
- Ⓟ 5 Year

7160A-VM

- C Amber
- V 12-24
- A 2.0
- X Vacuum-Magnet
- ⊙ SAE J845 Class I, Cal. Title 13, CE R10, IP66
- Ⓟ 5 Year

DIMENSIONS

3.9 [99] H x 6.5 [165] Diameter

AVAILABLE COLORS

Amber, Blue, Clear, Green & Red



CA models = clear lens / amber illumination

LENSES

R7160LX

Replace 'X' with A=Amber, B=Blue, C=Clear, G=Green, R=Red



15 flash patterns

Hi/Lo intensity and synchronization capable

Encapsulated electronics extend product life



beacons LED

7900 Series

SAE Class I LED



11 flash patterns

Encapsulated electronics for severe vibration applications (7975/80 only)

Aluminum base (Class I only)



7965A
C Amber
V 12-24
A 3.6
X 3 Bolt / 1" Pipe
 ☉ SAE J845 Class I, CE
 R10, RoHS
 ☺ 2 Year



7965A-VM
 Amber
 12-24
 3.6
 Vacuum-Magnet
 SAE J845 Class I, CE
 R10
 2 Year



7965A-HBT
 Amber
 12-24
 3.6
 High Bond Tape
 SAE J845 Class I, CE
 R10, RoHS
 2 Year



7970A
C Amber
V 12-24
A 3.6
X 3 Bolt / 1" Pipe
 ☉ SAE J845 Class I, CE
 R10, RoHS
 ☺ 2 Year



7970A-VM
 Amber
 12-24
 3.6
 Vacuum-Magnet
 SAE J845 Class I, CE
 R10
 2 Year



7970A-HBT
 Amber
 12-24
 3.6
 High Bond Tape
 SAE J845 Class I, CE
 R10, RoHS
 2 Year



7975A
T Severe Vibration
C Amber
V 12-24
A 3.6
X 3 Bolt / 1" Pipe
 ☉ SAE J845 Class I, CE, R10
 ☺ 2 Year



7980A
T Severe Vibration
C Amber
V 12-24
A 3.6
X 3 Bolt / 1" Pipe
 ☉ SAE J845 Class I, CE, R10
 ☺ 2 Year

AVAILABLE COLORS

Amber, Blue, Clear, Green & Red



DIMENSIONS

7965/7975: 4.9 [124] H,
7970/7980: 6.7 [170] H,
Base: 6.5 [165] Diameter

LENSES

R6050LX [5"], R6070LX [7"]
Replace 'X' with A=Amber, B=Blue, C=Clear, G=Green, R=Red



beacons LED

7900 Series

SAE Class II LED



7945A
C Amber
V 12-48
A 1.3
X 3 Bolt / 1" Pipe
⊗ SAE J845 Class II, CE
Ⓢ R10, RoHS
Ⓢ 2 Year



7945A-VM
C Amber
V 12-24
A 1.3
X Vacuum-Magnet
⊗ SAE J845 Class II, CE, R10
Ⓢ 2 Year



7945A-HBT
C Amber
V 12-24
A 1.3
X High Bond Tape
⊗ SAE J845 Class II, CE
Ⓢ R10, RoHS
Ⓢ 2 Year



7950A
C Amber
V 12-48
A 1.3
X 3 Bolt / 1" Pipe
⊗ SAE J845 Class II, CE,
Ⓢ R10, RoHS
Ⓢ 2 Year



7950A-VM
C Amber
V 12-24
A 1.3
X Vacuum-Magnet
⊗ SAE J845 Class II, CE, R10
Ⓢ 2 Year



7950A-HBT
C Amber
V 12-24
A 1.3
X High Bond Tape
⊗ SAE J845 Class II, CE
Ⓢ R10, RoHS
Ⓢ 2 Year

11 flash patterns

Encapsulated electronics for severe vibration applications (EB7930/35 only)

Reinforced polypropylene base (Class II only)



EB7930A
T Severe Vibration
C Amber
V 12-48
A 1.3
X 3 Bolt / 1" Pipe
⊗ SAE J845 Class II, CE, R10
Ⓢ 2 Year



EB7935A
T Severe Vibration
C Amber
V 12-48
A 1.3
X 3 Bolt / 1" Pipe
⊗ SAE J845 Class II, CE, R10
Ⓢ 2 Year

AVAILABLE COLORS

Amber, Blue, Clear, Green & Red



DIMENSIONS

7930/7945: 4.9 [124] H,
7935/7950: 6.7 [170] H,
Base: 6.5 [165] Diameter

LENSES

R6050LX [5"], R6070LX [7"]

Replace 'X' with A=Amber, B=Blue, C=Clear, G=Green, R=Red



beacons LED



6465 SAE Class III LED

Industrial applications
Reinforced nylon base
Ideal for material handling equipment



6465A
C Amber
V 12-80
A 1.9
F 85 FPMx8
X 3 Bolt
⊙ SAE J845 Class III
CE, R10, UL, RoHS
Ⓜ 3 Year



6465A-MG
Amber
12-24
1.9
85 FPMx8
Magnet
SAE J845 Class III
CE, R10
3 Year



6465A-HBT
Amber
12-24
1.9
85 FPMx8
High Bond Tape
SAE J845 Class III
CE, R10, RoHS
3 Year

AVAILABLE COLORS

Amber, Blue, Clear, Green & Red



DIMENSIONS

3.9 [99] H x 5.1 [130] Diameter

LENSES

R6400LX

Replace 'X' with A=Amber, B=Blue, C=Clear, G=Green, R=Red



beacons LED



6262 Series SAE Class III LED

Industrial applications

Encapsulated electronics extend product life

Ideal for material handling equipment



Wire exit: side

- # 6262A
- C Amber
- V 12-80
- A 0.47
- F 70 FPMx8
- X 2 Bolt
- ☑ SAE J845 Class III
- CE, R10, UL, IP66/67, RoHS
- 🕒 3 Year



Wire exit: bottom

- # 6263A
- C Amber
- V 12-80
- A 0.47
- F 70 FPMx8
- X 2 Bolt
- ☑ SAE J845 Class III
- CE, R10, UL, IP66/67, RoHS
- 🕒 3 Year



- # 6267A
- C Amber
- V 12-80
- A 0.47
- F 70 FPMx8
- X 1/2" Pipe
- ☑ SAE J845 Class III
- CE, R10, UL, IP66/67, RoHS
- 🕒 3 Year

AVAILABLE COLORS

Amber, Blue, Clear, Green & Red



DIMENSIONS

6262/6263: 4.9 [124] H x 3.9 [98] W
6267: 4.9 [124] H x 2.8 [71] Diameter

LENSES

R6260LX

Replace 'X' with A=Amber, B=Blue, C=Clear, G=Green, R=Red



beacons strobe

6700 Series

SAE Class II Strobe
Severe Vibration

Double or quad flash

Encapsulated electronics for severe vibration applications

6710/20 = reinforced polypropylene base

6750/70 = aluminum base/diagnostic indicator



*i.beam*TM
diagnostic indicator

- # 6750A
- C Amber
- V 12-24
- A 2.6
- F 75 FPMx2, 65 FPMx4
- J 10 Jx2, 16 Jx4
- X 3 Bolt / 1" Pipe
- ☑ SAE J1318 Class II
CE, R10, IP66
- 🕒 2 Year Strobe
6 Month Tube



*i.beam*TM
diagnostic indicator

- # 6770A
- C Amber
- V 12-24
- A 2.6
- F 75 FPMx2, 65 FPMx4
- J 10 Jx2, 16 Jx4
- X 3 Bolt / 1" Pipe
- ☑ SAE J1318 Class II
CE, R10, IP66
- 🕒 2 Year Strobe
6 Month Tube



- # 6710A
- C Amber
- V 12-48
- A 1.3
- F 75 FPMx2, 65 FPMx4
- J 7 Jx2, 10 Jx4
- X 3 Bolt / 1" Pipe
- ☑ SAE J1318 Class II
CE, R10
- 🕒 2 Year Strobe
6 Month Tube



- # 6720A
- C Amber
- V 12-48
- A 1.3
- F 75 FPMx2, 65 FPMx4
- J 7 Jx2, 10 Jx4
- X 3 Bolt / 1" Pipe
- ☑ SAE J1318 Class II
CE, R10
- 🕒 2 Year Strobe
6 Month Tube

6600 Series

SAE Class II Strobe



- # 6690A
- C Amber
- V 12-24
- A 2.2
- F 65 FPM
- J 8/13 Jx2, 12/17 Jx4
- X 3 Bolt / 1" Pipe
- ☑ SAE J1318 Class II,
CE, R10
- 🕒 2 Year Strobe
6 Month Tube

Double or quad flash

Hi/Lo intensity

Aluminum base



- # 6650A
- C Amber
- V 12-24
- A 2.2
- F 65 FPM
- J 8/13 Jx2, 12/17 Jx4
- X 3 Bolt / 1" Pipe
- ☑ SAE J1318 Class II,
CE, R10
- 🕒 2 Year Strobe
6 Month Tube



- # 6650A-VM
- C Amber
- V 12-24
- A 2.2
- F 65 FPM
- J 8/13 Jx2, 12/17 Jx4
- X Vacuum-Magnet
- ☑ SAE J1318 Class II
CE, R10
- 🕒 2 Year Strobe
6 Month Tube



- # 6670A
- C Amber
- V 12-24
- A 2.2
- F 65 FPM
- J 8/13 Jx2, 12/17 Jx4
- X 3 Bolt / 1" Pipe
- ☑ SAE J1318 Class II
CE, R10
- 🕒 2 Year Strobe
6 Month Tube



- # 6670A-VM
- C Amber
- V 12-24
- A 2.2
- F 65 FPM
- J 8/13 Jx2, 12/17 Jx4
- X Vacuum-Magnet
- ☑ SAE J1318 Class II
CE, R10
- 🕒 2 Year Strobe
6 Month Tube

AVAILABLE COLORS

Amber



DIMENSIONS

Low: 4.8 [121], Med: 6.7 [170],
High: 7.9 [200], 6.5 [165] Diameter

FLASHTUBE

R6501FT

LENSES

R6050LX [5"], R6070LX [7"]
Replace 'X' with A=Amber, B=Blue, C=Clear,
G=Green, R=Red



beacons strobe

6500 Series SAE Class II Strobe

Double or quad flash
On/off road suitable
Reinforced polypropylene base



6550A
C Amber
V 12-48
A 2.4
F 80 FPMx2, 65 FPMx4
J 7 Jx2, 10 Jx4
X 3 Bolt / 1" Pipe
⊗ SAE J1318 Class II
CE, R10
⊕ 2 Year Strobe
6 Month Tube



6550A-VM
Amber
12-24
2.4
80 FPMx2
7 Jx2
Vacuum-Magnet
SAE J1318 Class II
CE, R10
2 Year Strobe
6 Month Tube



6550A-HBT
Amber
12-24
2.4
80 FPMx2
7 Jx2
High Bond Tape
SAE J1318 Class II
CE, R10
2 Year Strobe
6 Month Tube



6570A
C Amber
V 12-48
A 2.4
F 80 FPMx2, 65 FPMx4
J 7 Jx2, 10 Jx4
X 3 Bolt / 1" Pipe
⊗ SAE J1318 Class II
CE, R10
⊕ 2 Year Strobe
6 Month Tube



6570A-VM
Amber
12-24
2.4
80 FPMx2
7 Jx2
Vacuum-Magnet
SAE J1318 Class II
CE, R10
2 Year Strobe
6 Month Tube



6570A-HBT
Amber
12-24
2.4
80 FPMx2
7 Jx2
High Bond Tape
SAE J1318 Class II
CE, R10
2 Year Strobe
6 Month Tube

AVAILABLE COLORS

Amber



DIMENSIONS

Low: 4.8 [121], Med: 6.7 [170],
High: 7.9 [200], 6.5 [165] Diameter

FLASHTUBE

R6501FT


LENSES

R6050LX [5"], R6070LX [7"]
Replace 'X' with A=Amber, B=Blue, C=Clear,
G=Green, R=Red

STAYING POWER

YOUR NO-DRILL SOLUTION

ECCO'S NEW HIGH BOND TAPE OFFERS COUNTLESS MOUNTING
OPTIONS WHILE PROVIDING DUROBILITY FOR THE TOUGHEST JOBS.

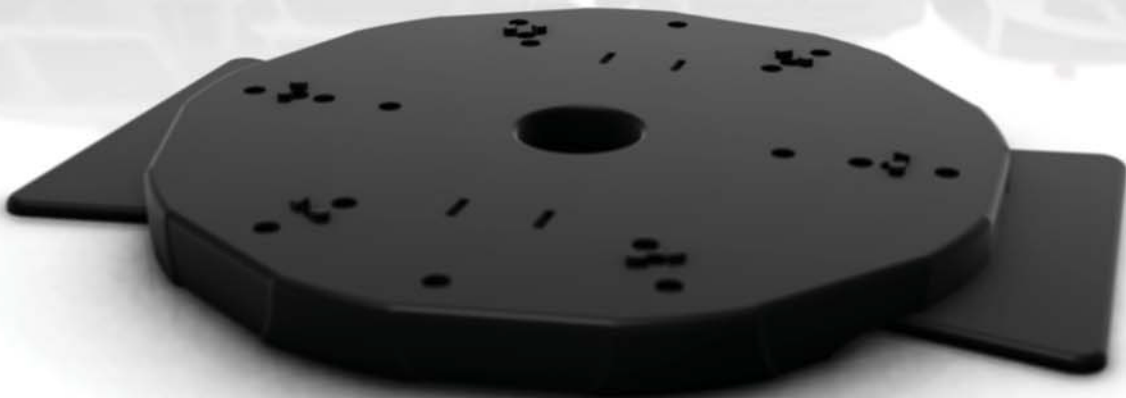



beacons strobe & rotating

6200 Series

Low-Intensity Strobe

Industrial applications

Encapsulated electronics extend product life

Ideal for material handling equipment



- # 6220A
- C Amber
- V 12-80
- A 0.6
- F 85 FPMx1
- J 1.5
- X 2 Bolt
- Ⓞ CE, R10, UL, IP66/67
- ⌚ 2 Year Strobe
- ⌚ 6 Month Tube

6410

Low-Intensity Strobe

Industrial applications

Reinforced nylon base

Ideal for material handling equipment



- # 6410A
- C Amber
- V 12-80
- A 0.3
- F 70 FPMx1
- J 1.5
- X 3 Bolt
- Ⓞ CE, R10, UL
- ⌚ 2 Year Strobe
- ⌚ 6 Month Tube



- # 6410A-MG
- C Amber
- V 12-24
- A 0.3
- F 70 FPMx1
- J 1.5
- X Magnet
- Ⓞ CE, R10
- ⌚ 2 Year Strobe
- ⌚ 6 Month Tube

5800 Series

SAE Class I Rotator

Belt-drive rotator mechanism

Free-form optical reflector maximizes light output

Polycarbonate base



- # 5813A
- C Amber
- V 12
- A 4.9
- F 195 RPM
- X 3 Bolt
- Ⓞ SAE J845 Class I
- ⌚ R10, R65
- ⌚ 1 Year Rotator
- ⌚ 3 Month Bulb



- # 5813A-MG
- C Amber
- V 12
- A 4.9
- F 195 RPM
- X Magnet
- Ⓞ SAE J845 Class I
- ⌚ R10, R65
- ⌚ 1 Year Rotator
- ⌚ 3 Month Bulb



- # 5810A
- C Amber
- V 12
- A 4.9
- F 195 RPM
- X DIN Pole
- Ⓞ SAE J845 Class I
- ⌚ R10, R65
- ⌚ 1 Year Rotator
- ⌚ 3 Month Bulb



- # 5816A
- C Amber
- V 12
- A 4.9
- F 195 RPM
- X 1 Bolt
- Ⓞ SAE J845 Class I
- ⌚ R10, R65
- ⌚ 1 Year Rotator
- ⌚ 3 Month Bulb

AVAILABLE COLORS

Amber



DIMENSIONS

6410: 3.9 [99] H x 5.1 [130] Diameter
 6220: 5.5 [140] H x 3.9 [98] W x 2.8 [71] D
 5810: 8.2 [208] H x 5.3 [134] Diameter
 5813: 5.7 [146] H x 6.0 [153] Diameter
 5816: 7.3 [208] H x 5.3 [134] Diameter

FLASHTUBE

R6410FT 6410
 R6200FT 6200

BULB

R5812BH

LENSES

R6400LA 6410,
 R6220A 6200
 R5810LA 5810/13/16

New to the REFLEX line,
the **5545** and **5550**

SLEEK YET



POWERFUL

Our Reflex™ line of micro and minibars provide a compact, sleek yet powerful warning solution offering the flexibility of either permanent or vacuum-magnet mounting. These slim, high-intensity LEDs maximize light output and have 18 flash patterns.





minibars LED




5550 Reflex® **NEW**

SAE Class I LED, 11"

Four LED modules, each containing 12 linear optic LEDs provide high intensity light output


18 flash patterns and synchronization capable

Cigarette plug adapter with on/off and flash pattern switches (magnet models)




5550A

- C** Amber
- V** 12-24
- A** 2.7
- X** 4 Bolt
- ⊗ SAE J845 Class I, Cal. Title 13, IP65, CE, R10, R65 (A,CA only), RoHS
- ⌚ 3 Year




5550CA

- Amber
- 12-24
- 2.7
- 4 Bolt
- ⊗ SAE J845 Class I, Cal. Title 13, IP65, CE, R10, R65 (A,CA only), RoHS
- 3 Year




5550CAC

- Amber
- 12-24
- 2.7
- 4 Bolt
- ⊗ SAE J845 Class I, Cal. Title 13, CE, R10, IP65, RoHS
- 3 Year




5550A-VM

- C** Illuminates Amber
- V** 12-24
- A** 2.7
- X** Vacuum-Magnet
- ⊗ SAE J845 Class I, Cal. Title 13, IP65, CE, R10, R65 (A,CA only), RoHS
- ⌚ 3 Year



5550CA-VM

- Illuminates Amber
- 12-24
- 2.7
- Vacuum-Magnet
- ⊗ SAE J845 Class I, Cal. Title 13, IP65, CE, R10, R65 (A,CA only), RoHS
- 3 Year



5550CAC-VM

- Illuminates Amber
- 12-24
- 2.7
- Vacuum-Magnet
- ⊗ SAE J845 Class I, Cal. Title 13, CE, R10, IP65, RoHS
- 3 Year

AVAILABLE COLORS

Amber, Clear, Amber/Clear



DIMENSIONS

2.2 [56] H x 10.9 [278] W x 7.6 [194] D

DOMES

R5545LX

Replace 'X' with A=Amber, C=Clear



minibars LED




5545 Reflex® **NEW**

SAE Class II LED, 11"


Four LED modules, each containing 6 linear optic LEDs provide high intensity light output

18 flash patterns and synchronization capable


Cigarette plug adapter with on/off and flash pattern switches (magnet models)




- # 5545A
- C Amber
- V 12-24
- A 0.7
- X 4 Bolt
- ⊗ SAE J845 Class II, CE, R10, IP65, AMECA, RoHS
- 🕒 3 Year



- 5545CA
- Illuminates Amber
- 12-24
- 0.7
- Vacuum-Magnet
- SAE J845 Class II, CE, R10, IP65, AMECA, RoHS
- 3 Year



- # 5545A-VM
- C Amber
- V 12-24
- A 0.7
- X 4 Bolt
- ⊗ SAE J845 Class II, CE, R10, IP65, AMECA, RoHS
- 🕒 3 Year



- 5545CA-VM
- Illuminates Amber
- 12-24
- 0.7
- Vacuum-Magnet
- SAE J845 Class II, CE, R10, IP65, AMECA, RoHS
- 3 Year

AVAILABLE COLORS

Amber, Clear



DIMENSIONS

2.2 [56] H x 10.9 [278] W x 7.6 [194] D


DOMES

R5545LX

Replace 'X' with A=Amber, C=Clear



minibars LED

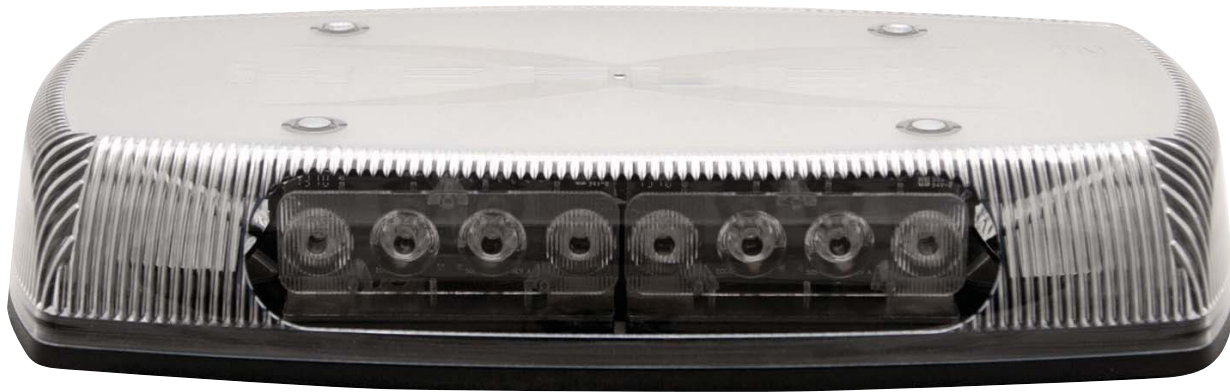


5590 Reflex®


SAE Class I LED, 15"

Lenticular optic lens with combined Reflective and TIR Optic LED modules to optimize focused front/rear warning and wide-angle side warning
18 flash patterns and synchronization capable


Cigarette plug adapter with on/off and flash pattern switches (magnet models)




- # 5590A
- C Amber
- V 12-24
- A 6.0
- X 4 Bolt
- SAE J845 Class I
- Cal. Title 13, CE, R10, IP65
- 3 Year




- # 5590A-MG
- Amber
- 12-24
- 6.0
- Magnet
- SAE J845 Class I
- Cal. Title 13, CE, R10
- 3 Year




- # 5590A-VM
- Amber
- 12-24
- 6.0
- Vacuum-Magnet
- SAE J845 Class I
- Cal. Title 13, CE, R10
- 3 Year




- # 5590A-HBT
- Amber
- 12-24
- 6.0
- High Bond Tape
- SAE J845 Class I
- Cal. Title 13, CE, R10
- 3 Year




- # 5590CA
- C Illuminates Amber
- V 12-24
- A 6.0
- X 4 Bolt
- SAE J845 Class I
- Cal. Title 13, CE, R10, IP65
- 3 Year



- # 5590CA-MG
- Illuminates Amber
- 12-24
- 6.0
- Magnet
- SAE J845 Class I
- Cal. Title 13, CE, R10
- 3 Year



- # 5590CA-VM
- Illuminates Amber
- 12-24
- 6.0
- Vacuum-Magnet
- SAE J845 Class I
- Cal. Title 13, CE, R10
- 3 Year



- # 5590CA-HBT
- Illuminates Amber
- 12-24
- 6.0
- High Bond Tape
- SAE J845 Class I
- Cal. Title 13, CE, R10
- 3 Year

AVAILABLE COLORS

Amber, Blue, Clear, Green & Red
(MG models amber & amber/clear only)



DIMENSIONS

2.5 [63] H x 15 [381] W x 9 [229] D
3.1 [79] H including vacuum-magnet

DOMES

R5590LX
Replace 'X' with A=Amber, C=Clear



minibars LED




5597 Reflex®

SAE Class I LED, 15"


Lenticular optic lens with combined Reflective and TIR Optic LED modules to optimize focused front/rear warning and wide-angle side warning

18 flash patterns and synchronization capable


Cigarette plug adapter with on/off and flash pattern switches (magnet models)




- # 5597A
- C Amber
- V 12-24
- A 6.0
- X 4 Bolt
- Ⓢ SAE J845 Class I, Cal. Title 13, CE, R10, IP65
- 🕒 3 Year




- # 5597A-MG
- Amber
- 12-24
- 6.0
- Magnet
- SAE J845 Class I, Cal. Title 13, CE, R10
- 3 Year




- # 5597A-VM
- Amber
- 12-24
- 6.0
- Vacuum-Magnet
- SAE J845 Class I, Cal. Title 13, CE, R10
- 3 Year



- # 5597CA
- C Illuminates Amber
- V 12-24
- A 6.0
- X 4 Bolt
- Ⓢ SAE J845 Class I, Cal. Title 13, CE, R10, IP65
- 🕒 3 Year



- # 5597CA-MG
- Illuminates Amber
- 12-24
- 6.0
- Magnet
- SAE J845 Class I, Cal. Title 13, CE, R10
- 3 Year



- # 5597CA-VM
- Illuminates Amber
- 12-24
- 6.0
- Vacuum-Magnet
- SAE J845 Class I, Cal. Title 13, CE, R10
- 3 Year

AVAILABLE COLORS

Amber, Clear, Amber/Clear
(MG models amber & amber/clear only)



DIMENSIONS


2.5 [63] H x 15 [381] W x 9 [229] D
3.1 [79] H including vacuum-magnet

DOMES

EZ5507LX
Replace 'X' with A=Amber, C=Clear



minibars LED

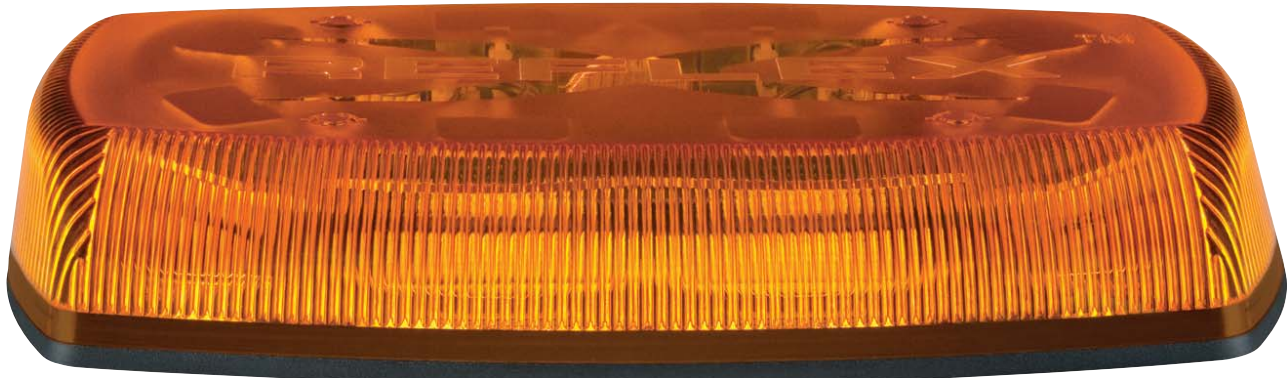


5585 Reflex®

SAE Class I LED, 15"


Lenticular optic lens with reflective LED modules

18 flash patterns and synchronization capable


Cigarette plug adapter with on/off and flash pattern switches (magnet models)




- # 5585A
- C Amber
- V 12-24
- A 5.1
- X 4 Bolt
- ⊗ SAE J845 Class I, CE, R10
IP65, RoHS
- ⌚ 3 Year




- 5585A-MG
- Amber
- 12-24
- 5.1
- Magnet
- SAE J845 Class I, CE, R10
- 3 Year




- 5585A-VM
- Amber
- 12-24
- 5.1
- Vacuum-Magnet
- SAE J845 Class I, CE, R10
- 3 Year




- 5585A-HBT
- Amber
- 12-24
- 5.1
- High Bond Tape
- SAE J845 Class I, CE
R10, RoHS
- 3 Year




- # 5585CA
- C Illuminates Amber
- V 12-24
- A 5.1
- X 4 Bolt
- ⊗ SAE J845 Class I,
Cal. Title 13, CE, R10
IP65, RoHS
- ⌚ 3 Year



- 5585CA-MG
- Illuminates Amber
- 12-24
- 5.1
- Magnet
- SAE J845 Class I,
Cal. Title 13, CE, R10
- 3 Year



- 5585CA-VM
- Illuminates Amber
- 12-24
- 5.1
- Vacuum-Magnet
- SAE J845 Class I,
Cal. Title 13, CE, R10
- 3 Year



- 5585CA-HBT
- Illuminates Amber
- 12-24
- 5.1
- High Bond Tape
- SAE J845 Class I,
Cal. Title 13, CE
R10, RoHS
- 3 Year

AVAILABLE COLORS

Amber, Blue, Clear, Green, Red & Amber/
Clear (MG models amber illumination only)



DIMENSIONS


2.5 [63] H x 15 [381] W x 9 [229] D
3.1 [79] H including vacuum-magnet

DOMES

R5590LX
Replace 'X' with A=Amber, C=Clear



minibars LED

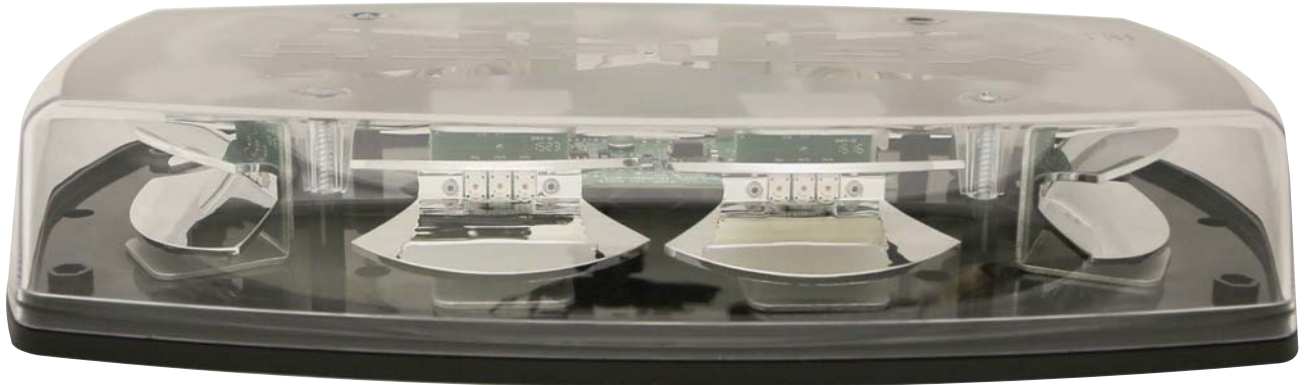


5587 Reflex®

SAE Class I LED, 15"

Zero optic lens with reflective LED modules

18 flash patterns and synchronization capable

Cigarette plug adapter with on/off and flash pattern switches (magnet models)



5587A

C Amber


V 12-24

A 5.1

X 4 Bolt

⊙ SAE J845 Class I, CE, R10, IP65, RoHS

⌚ 3 Year



5587A-MG

Amber


12-24

5.1

Magnet

SAE J845 Class I, CE, R10

3 Year



5587A-VM

Amber


12-24

5.1

Vacuum-Magnet

SAE J845 Class I, CE, R10

3 Year



5587CA

C Illuminates Amber


V 12-24

A 5.1

X 4 Bolt

⊙ SAE J845 Class I,
Cal. Title 13, CE, R10, IP65, RoHS

⌚ 3 Year



5587CA-MG

Illuminates Amber


12-24

5.1

Magnet

SAE J845 Class I,
Cal. Title 13, CE, R10

3 Year



5587CA-VM

Illuminates Amber

12-24

5.1

Vacuum-Magnet

SAE J845 Class I,
Cal. Title 13, CE, R10

3 Year

AVAILABLE COLORS

Amber, Clear, Amber/Clear

(MG models amber & amber/clear only)



DIMENSIONS

2.5 [63] H x 15 [381] W x 9 [229] D

3.1 [79] H including vacuum-magnet


DOMES

EZ5507LX

Replace 'X' with A=Amber, C=Clear



minibars LED

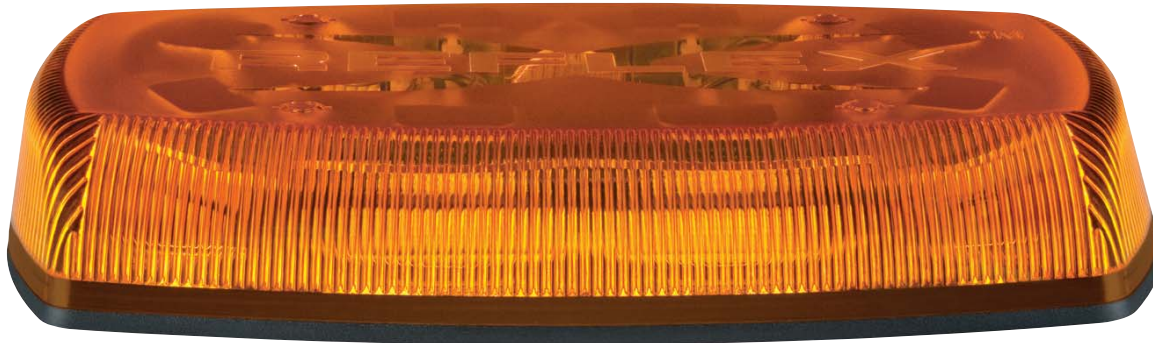


5580 Reflex®

SAE Class II LED, 15"


Lenticular optic lens with reflective LED modules

18 flash patterns and synchronization capable


Cigarette plug adapter with on/off and flash pattern switches (magnet models)




5580A
C Amber
V 12-24
A 2.7
X 4 Bolt
 ⓘ SAE J845 Class II, CE, R10
 IP65, RoHS
 ⌚ 3 Year




5580A-MG
 Amber
 12-24
 2.7
 Magnet
 SAE J845 Class II, CE, R10
 3 Year




5580A-VM
 Amber
 12-24
 2.7
 Vacuum-Magnet
 SAE J845 Class II, CE, R10
 3 Year




5580A-HBT
 Amber
 12-24
 2.7
 High Bond Tape
 SAE J845 Class II, CE
 R10, RoHS
 3 Year




5580CA
 Illuminates Amber
 12-24
 2.7
 4 Bolt
 ⓘ SAE J845 Class II, CE, R10
 IP65, RoHS
 ⌚ 3 Year



5580CA-MG
 Illuminates Amber
 12-24
 2.7
 Magnet
 SAE J845 Class II, CE, R10
 3 Year



5580CA-VM
 Illuminates Amber
 12-24
 2.7
 Vacuum-Magnet
 SAE J845 Class II, CE, R10
 3 Year



5580CA-HBT
 Illuminates Amber
 12-24
 2.7
 High Bond Tape
 SAE J845 Class II, CE
 R10, RoHS
 3 Year

AVAILABLE COLORS

Amber



DIMENSIONS

2.5 [63] H x 15 [381] W x 9 [229] D
 3.1 [79] H including vacuum-magnet

DOMES

R5500LX
 Replace 'X' with A=Amber, C=Clear



minibars LED



DuoBEAM™ Series **NEW**

SAE Class I LED Minibars

High Intensity LED Modules

19 flash patterns (single color or dual color)

#	21-DB001-E	21-DB002-E	21-DB003-E	21-DB004-E	21-DB005-E
C	Amber	Clear	Clear/Amber	Amber/Amber/Amber	Clear/Clear/Clear
V	12	12	12	12	12
A	2.0	2.0	2.0	4.0	4.0
X	4 Bolt	4 Bolt	4 Bolt	4 Bolt	4 Bolt
	SAE J845 Class I, Cal. Title 13	SAE J845 Class I, Cal. Title 13	SAE J845 Class I, Cal. Title 13	SAE J845 Class I, Cal. Title 13	SAE J845 Class I, Cal. Title 13
	3 Year	3 Year	3 Year	3 Year	3 Year
#	21-DB006-E	21-DB007-E	27-DB001-E	27-DB002-E	27-DB003-E
C	Clear/Amber/Amber	Clear/Amber/Clear	Amber	Clear	Clear/Amber
V	12	12	12	12	12
A	4.0	4.0	6.4	6.4	6.4
X	4 Bolt	4 Bolt	4 Bolt	4 Bolt	4 Bolt
	SAE J845 Class I, Cal. Title 13	SAE J845 Class I, Cal. Title 13	SAE J845 Class I, Cal. Title 13	SAE J845 Class I, Cal. Title 13	SAE J845 Class I, Cal. Title 13
	3 Year	3 Year	3 Year	3 Year	3 Year

AVAILABLE COLORS

Amber, Clear, Amber/Clear



DIMENSIONS

3.3 [83] H x 10.3 [261] W x 10.3 [261] D



minibars LED

ADDITIONAL COLORS & CUSTOM CONFIGURATIONS AVAILABLE



21-00003-E (back view)

21 Series SAE Class I LED, 22"

Low-profile chassis

Three, four, six, nine, and 18 TIR LED modules

Integrated LED Safety Director™

19 flash patterns (independent flashing)

Aluminum chassis, polycarbonate base and lens

Magnet mount available for 22" lightbars (EZ2122MG)

SYMBOLS

6 LED Warning Module

4 LED Warning Module


AVAILABLE COLORS

Amber, Blue, Green, Red & White

DIMENSIONS


2.1 [53] H x 12.3 [312] W

TIR Optic




22" # 21-00001-E

- C** Amber
- T** 4 LEDs
- V** 12
- A** 2.0
- ☑ SAE J845 Class I, Cal. Title 13
- 🕒 5 Year



22" # 21-00002-E

- C** Amber
- T** 6 LEDs
- V** 12
- A** 3.0
- ☑ SAE J845 Class I, Cal. Title 13
- 🕒 5 Year



22" # 21-00003-E

- C** Amber
- T** 8 LEDs
- V** 12
- A** 4.0
- ☑ SAE J845 Class I, Cal. Title 13
- 🕒 5 Year



minibars LED

ADDITIONAL COLORS & CUSTOM CONFIGURATIONS AVAILABLE



27-00003-E (back view)

27 Series SAE Class I LED 22"

Medium-profile chassis

Three, eight, 12, and 22 reflective LED modules

Integrated LED Safety Director™

19 flash patterns (independent flashing)

Aluminum chassis, polycarbonate base and lens

Magnet mount available for 22" lightbars (EZ2122MG)

SYMBOLS

12 LED Warning Module

8 LED Warning Module


AVAILABLE COLORS Amber, Blue, Red & White



DIMENSIONS

2.7 [69] H x 12.2 [310] W

REFLECTIVE



22" # 27-00001-E

C Amber


T 4 LEDs

V 12

A 2.0

SAE J845 Class I, Cal. Title 13

5 Year



22" # 27-00002-E

C Amber


T 6 LEDs

V 12

A 3.0

SAE J845 Class I, Cal. Title 13

5 Year



22" # 27-00003-E

C Amber

T 8 LEDs

V 12

A 4.0

SAE J845 Class I, Cal. Title 13

5 Year



lightbars LED

ADDITIONAL COLORS & CUSTOM CONFIGURATIONS AVAILABLE



15-00019-E (back view)

15 Series LED Lightbar, 23"

Available with TIR Optic or Reflective LED modules
 Alternating or simultaneous flash (quad)
 2" height profile
 Aluminum base

SYMBOLS

LED Warning Module

Additional modules available for custom configuration.

LED

DIMENSIONS

2 [53] H x 12 [305] W
 2.1 [53] H x 23.2 [590] W x 12.2 [310] D (22" lightbar)


Controller
 2 [50] H x 3.5 [90] W x 0.5 [8] D

AVAILABLE COLORS


Amber

23"


TIR Optic




15-00011-E
 Illuminates Amber
 12
 0.8
 80 FPMx4
 4 Bolt
 2 Year Lightbar
 5 Year Electrical



15-00015-E
 Illuminates Amber
 12
 1.6
 80 FPMx4
 4 Bolt
 2 Year Lightbar
 5 Year Electrical



15-00013-E
 Illuminates Amber
 12
 1.2
 80 FPMx4
 4 Bolt
 2 Year Lightbar
 5 Year Electrical




15-00019-E
 Illuminates Amber
 12
 2.0
 80 FPMx4
 4 Bolt
 2 Year Lightbar
 5 Year Electrical


REFLECTIVE




15-01423-E
 Illuminates Amber
 12
 2.8
 80 FPMx4
 4 Bolt
 2 Year Lightbar
 5 Year Electrical



15-01428-E
 Illuminates Amber
 12
 5.6
 80 FPMx4
 4 Bolt
 2 Year Lightbar
 5 Year Electrical



15-01427-E
 Illuminates Amber
 12
 4.2
 80 FPMx4
 4 Bolt
 2 Year Lightbar
 5 Year Electrical



15-01429-E
 Illuminates Amber
 12
 7.0
 80 FPMx4
 4 Bolt
 2 Year Lightbar
 5 Year Electrical



minibars LED



5280 RotoLED™ SAE Class I LED Hybrid, 13"

No gears, brushes, or bulbs to wear out

LED optics produce intense rotating beam

UV hard-coated lens reduces abrasion, cracking and fading



- # 5280A
- C Amber
- V 12-24
- A 4.0
- F 360 FPM
- X 4 Bolt
- ✓ SAE J845 Class I
- CE, R10, IP67
- 🕒 5 Year



- # 5280A-MG
- C Amber
- V 12-24
- A 4.0
- F 360 FPM
- X Magnet
- ✓ SAE J845 Class I
- CE, R10, IP67
- 🕒 5 Year

AVAILABLE COLORS

Amber



DIMENSIONS

5.8 [146] H x 13.3 [337] W x 6.3 [160] D



beacons strobe & rotating

5350

SAE Class II Strobe, 15"



- # 5350AAA
- C Amber
- V 12-48
- A 3.0
- F 80 FPMx2, 65 FPMx4
- J 7 Jx2, 10 Jx4
- X 4 Bolt
- ⊗ CE (SAE J1318 Class II 5350CAA model only)
- ⌚ 2 Year Strobe, 6 Month Tube



- # 5350AAA-VM
- C Amber
- V 12-24
- A 3.0
- F 80 FPMx2
- J 7 Jx2
- X Vacuum-Magnet
- ⊗ CE (SAE J1318 Class II 5350CAA model only)
- ⌚ 2 Year Strobe, 6 Month Tube

AVAILABLE COLORS

Amber



DIMENSIONS

5.8 [147] H x 15.7 [400] W
x 8.3 [210] D
6.2 [157] H including vacuum-magnet

FLASHTUBE

R6501FT

DOMES

R5300LX

LENSES

R6050LA

5315

SAE Class I Rotator, 15"



- # 5315A
- C Amber
- V 12-48
- A 8.6
- F 300 FPM
- X 4 Bolt
- ⊗ SAE J845 Class I California Title 13
- ⌚ 2 Year Rotator, 3 Month Bulb



- # 5315A-VM
- C Amber
- V 12-48
- A 8.6
- F 300 FPM
- X Vacuum-Magnet
- ⊗ SAE J845 Class I California Title 13
- ⌚ 2 Year Rotator, 3 Month Bulb

AVAILABLE COLORS

Amber



DIMENSIONS

5.8 [147] H x 15.7 [400] W
x 8.3 [210] D
6.2 [157] H including vacuum-magnet

BULB

R5012BH 12V
R5024BH 24V

DOMES

R5300LA



accessories

Beacon Lenses



7960 Series
R7960LA - Amber
R7960LB - Blue
R7960LC - Clear
R7960LG - Green
R7960LR - Red



7100 Series
R7160LA - Amber
R7160LB - Blue
R7160LC - Clear
R7160LG - Green
R7160LR - Red



7900/6700/6600/6500
R6050LA - Amber
R6050LB - Blue
R6050LC - Clear
R6050LG - Green
R6050LR - Red



7900/6700/6600/6500
R6070LA - Amber
R6070LB - Blue
R6070LC - Clear
R6070LG - Green
R6070LR - Red



6410 / 6465
R6400LA - Amber
R6400LB - Blue
R6400LC - Clear
R6400LG - Green
R6400LR - Red



6220 Strobe
R6220LA - Amber



6200 Series LED
R6260LA - Amber
R6260LB - Blue
R6260LC - Clear
R6260LR - Red



5800 Series
R5810LA - Amber



5800 Series
R5840LA - Amber

Minibar Domes / Lenses



70 Series - 22" Lens
5315/5350 - 15"
R6050LA - Amber



70 Series - 22" Filter
5315/5350 - 15"
A5000FA - Amber



5315/5350 - 15"
R5300LA - Amber



5580/5585 15" Dome
R5500LA - Amber
R5500LC - Clear



5590 15" Dome
R5590LA - Amber
R5590LC - Clear



5587/5597 15" Dome
EZ5507LA - Amber
EZ5507LC - Clear



5545/5550 11" Dome
R5545LA - Amber
R5545LC - Clear



15 Series - All Models
R159-901X - End Upper
R309-902C - End Lower
R109-906X - Center Upper Long
R209-907C - Center Lower Long



21 Series - All Models
EZ2127U22X - 22" Upper Lens
EZ21L22C - 22" Lower Lens



27 Series - All Models
EZ2127U22X - 22" Upper Lens
EZ22L22C - 22" Lower Lens

accessories

Light Source Components



EZ21IF4X - Module
Front/rear TR4 LED module - independent flashing (A, B, G, R, W)
Used with 21 & DuoBEAM Series



EZ21IF6X - Module
Corner TR6 LED module - independent flashing (A, B, G, R, W)
Used with 21 & DuoBEAM Series



EZ27IF8SX - Module
Front/rear REF8 LED module - steady burn (A, B, R, W)
Used with 27 & DuoBEAM Series



EZ27IF12X - Module
Front/rear REF12 LED module - independent flashing (A, B, R, W)
Used with 27 & DuoBEAM Series



A109-924X - Module
Front/rear TIR module w/pigtail (A, B, C, R)
Used with 15 Series



A159-938X - Module
Corner TIR module w/pigtail (A, B, C, R)
Used with 15 Series



EZ0001X - Module
Front/rear reflective module (A, B, C, R)
Used with 10 & 15 Series



EZ0002X - Module
Corner reflective module (A, B, C, R)
Used with 10 & 15 Series



R5015MGA - Assembly
Motor gear rotator 12V
Used with 5315 Series



R5101RA - Assembly
Belt drive rotator 12V
Used with 5135



R5800RA - Assembly
Belt drive rotator 12V
Used with 5800 Series



R6004RA - Assembly
Belt drive rotator 12V
Used with 60 Series



R6004STT - Assembly
Stop-Tail-Indicator lamp
Used with 60 Series



R6002WL - Assembly
Worklamp
Used with 60 Series



R5100RF
Rotator belt/reflector
Used with R5101RA, R5800RA, R6004RA, 5135, 5800 & 60 Series rotators



R5300RF
Rotator reflector
Used with R5015MGA & 5315 Series rotators



A5000FX
Rotator filter (A, B, R)
Used with R5015MGA & 5315 Series



R5101B / R5801B
Rotator belt/reflector
R5101B used with R5101RA, R6004RA, 5135 & 60 Series rotators
R5801B used with R5800RA & 5800 Series



R6501FT - Flashtube
Helical (360° strobes)
Used with 5150, 5350, 6500, 6600, 6700, 6900 & 60 Series 360° strobes



R9000FT - Flashtube
Helical (directional strobes)
Used with 60 Series directional strobes



R6410FT - Flashtube
'U' (industrial 360° strobe)
Used with 6410



R6200FT - Flashtube
Linear (industrial 360° strobe)
Used with 6220, 6225 & 6226



R5812BH - Bulb
Halogen 12V H1
Used with 5135, 5800, 60 Series rotators



R5012BH - Bulb
Halogen 12V Bayonet
Used with 5315 Series rotators & 60 Series directional halogens



R5024BH - Bulb
Halogen 24V Bayonet
Used with 5315 Series rotators



E94001 - Bulb
H3 Bulb 12V, 55W
E94002 - Bulb
H3 Bulb 24V, 70W
Used with halogen worklamps



accessories

Guards & Covers



A6050BG
5" Branch guard
Used with 6550, 6650, 6710, 6750, 7160, 7930, 7945, 7965 & 7975



A6070BG
7" Branch guard
Used with 6570, 6670, 6720, 6770, 7935, 7950, 7960, 7970 & 7980



A6090BG
7" High base branch guard
Used with 6690



A6220BG / 6400
Branch guard
A6220BG used with 6200 Series
A6400BG used with 6400 Series



A6501BT
Black top
Used with 6500, 6600, 6700, 6900 & 7900 Series



A6520BG
5" J-Bolt
Used with 6520



A6050DC
5" Dust cover
Used with 6550, 6650, 6710, 6750, 7930, 7945, 7965 & 7975



A6070DC
7" Dust cover
Used with 6570, 6670, 6690, 6770, 7935, 7950, 7970 & 7980



A6400HC
1/2 Lens cover
Used with 6400 Series



A6600HT
1/2 Lens cover
Used with 6550, 6650, 6710, 6750, 7930, 7945, 7965 & 7975

Cables & Plugs

cables y enchufes | câbles et prises



R5135CP
17' Cigarette Cord & Plug
Used with 5813-MG



R5300CP
17' Cigarette Cord & Plug
Used with 5315-VM



R5150CP
15' Cigarette Cord & Plug
Used with 5350-VM



R5500CP
15' Cigarette Cord & Plug
Used with 5500 Series



R6600CP
15' Cigarette Cord & Plug
Used with A6600MK, 6400, 6500, 6600 & 7900 Series

Switches & Controls



E22127SB
Switch box - 3 level slide, 6 switch 12V
Used with all Beacons and Minibars



A9000
Switchbox - 6 switch 12V
Used with all Beacons and Minibars



A9891
Illuminated 12V-Amber-SPST
Used with all Beacons and Minibars



A9893
Switch panel - single slot (excludes switch)
Used with all Beacons and Minibars



A9904
Bracket mounting kit
Used with all Beacons and Minibars



A9905SW
On/off & flash pattern switches
Used with all Beacons and Minibars



A9660SW
Remote strobe switch
Used with all Beacons and Minibars



A9901
Illuminated 12V
Used with all Beacons and Minibars



A9902
Bracket - end section
Used with all Beacons and Minibars



A9903
Bracket - center section
Used with all Beacons and Minibars

Dome Clips



E22127LC
Lens retaining clip
Used with 21/27 & DuoBEAM Series

accessories

Mounting Hardware



A5850TB
T Bracket DIN Pole Mount
Used with 5810 & 5850



A5850LB
L Bracket DIN Pole Mount
Used with 5810 & 5850



A6400MB
1" Pipe Mirror Bracket
Used with 6550, 6570, 7460,
7945 & 7950



A6400MBP
Mirror Bracket Adapter Plate
Used with 6200 & 6400 Series
(use with A6400MB)



A7660PF
1" Pipe Mount Flange
Used with 7600 Series



A6520HW
J-Bolt Installation Kit
Used with 6520 & 6530



A6600VDK
Vibration Damping Mount Kit
Used with 6500, 6600, 6700, 6900,
7100, 7400, 7600 & 7900 Series



A6600SLB
Self-Leveling Bracket
Used with 6500, 6600, 6700, 6900,
7100, 7400, 7600 & 7900 Series



A5300VMK
Vacuum-Magnet Mount Kit
Used with 5100 & 5300 Series



A5545VMK
Vacuum-Magnet Mount Kit
Used with 5550 & 5545



A5500VMK
Vacuum-Magnet Mount Kit
Used with 5500 Series



A6000VMK
Vacuum-Magnet Mount Kit
Used with 6500, 6600, 6900, 7100,
7400, 7600 & 7900 Series



A7660VMK
Vacuum-Magnet Mount Kit
Used with 7400 & 7600 Series



A6600MK
Magnet Mount Kit
Used with 6500, 6600, 6900, 7100,
7400, 7600 & 7900 Series



A7660MK
Magnet Mount Kit
(Requires A7660PF
for use with 7600 Series)
Used with 7400 & 7600 Series



A7180VMK
Vacuum-Magnet Mount Kit
Used with EB7180 (5A fuse)



A7185VMK
Vacuum-Magnet Mount Kit
Used with EB7185 (15A fuse)



A5300M
2 3/8" Magnet
Used with 5280MG & 5315MG



R6600M
3" Magnet
Used with A6600MK



A6600MC
Magnet Cover
Used with A6600MK



EZ21DBPM
Pylon Mount Kit
Used with 21/27 Series & DuoBEAM



EZ21DBMM
Mirror Mount Kit
Used with 21/27 Series & DuoBEAM



EZ21DBMG
Magnet Mount Kit
Used with 21/27 Series & DuoBEAM



A2127HRMK
Headache Rack Bracket
Used with 21/27 Series & DuoBEAM



A2127FT
Standard Feet Kit
Used with 21/27 Series & DuoBEAM



A5005RMK
Rubber Feet Kit
Used with 15 Series



A5500HBTK
High Bond Tape Kit
Used with 5580, 5585, 5587,
5590, 5597



A6000HBTK
High Bond Tape Kit
Used with 5550, 5545 &
6500, 6900, 7900 Series



A6465HBTK
High Bond Tape Kit
Used with 6465



A6520FM
Flush Mount Base
Used with 6520 & 6530



part number index

BEACONS	PART #	PAGE #	TYPE	CLASS RATING	AMPS	VDC
		5810	17	Rotator	Class I	4.9
	5813	17	Rotator	Class I	4.9	12
	5816	17	Rotator	Class I	4.9	12
	6220	16	Strobe	Low Intensity	0.6	12-80
	6262	13	LED	Class III	0.47	12-80
	6263	13	LED	Class III	0.47	12-80
	6267	13	LED	Class III	0.47	12-80
	6410	16	Strobe	Low Intensity	0.3	12-80
	6465	12	LED	Class III	1.9	12-80
	6550	15	Strobe	Class II	2.4	12-48
	6570	15	Strobe	Class II	2.4	12-48
	6650	15	Strobe	Class II	2.2	12-24
	6670	15	Strobe	Class II	2.2	12-24
	6690	15	Strobe	Class II	2.2	12-24
	6710	14	Strobe	Class II	1.3	12-48
	6720	14	Strobe	Class II	1.3	12-48
	6750	14	Strobe	Class II	2.6	12-24
	6770	14	Strobe	Class II	2.6	12-24
	7160	9	LED	Class I	2.0	12-24
	7460	9	LED	Class I	3.6	12-36
	7660	7	LED Hybrid	Class I	2.1	12-24
	7945	11	LED	Class II	1.3	12-48
	7950	11	LED	Class II	1.3	12-48
	7960	7	LED	Class I	3.7	12-24
	7965	11	LED	Class I	3.6	12-24
	7970	11	LED	Class I	3.6	12-24
	7975	11	LED	Class I	3.6	12-24
	7980	11	LED	Class I	3.6	12-24
	EB7180	8	LED	Class I	6.2	12-24
	EB7185	8	Dual Color LED	Class I	8.6	12-24
	EB7930	11	LED	Class II	1.3	12-48
	EB7935	11	LED	Class II	1.3	12-48



part number index

MINIBARS	PART #	PAGE #	TYPE	SIZE	CLASS RATING	AMPS	VDC
	5280A	31	LED Hybrid	13"	Class I	4.0	12-24
5315	32	Rotator	15"	Class I	8.6	12	
5350	32	Strobe	15"	Class II	3.0	12-48	
5545	21	LED	11"	Class II	0.7	12-24	
5550	20	LED	11"	Class I	2.7	12-24	
5580	26	LED	15"	Class II	2.7	12-24	
5585	24	LED	15"	Class I	5.1	12-24	
5587	25	LED	15"	Class I	5.1	12-24	
5590	22	LED	15"	Class I	6.0	12-24	
5597	23	LED	15"	Class I	6.0	12-24	
15-00011-E	30	LED	23"	-	0.8	12	
15-00013-E	30	LED	23"	-	1.2	12	
15-00015-E	30	LED	23"	-	1.6	12	
15-00019-E	30	LED	23"	-	2.0	12	
15-01423-E	30	LED	23"	-	2.8	12	
15-01427-E	30	LED	23"	-	4.2	12	
15-01428-E	30	LED	23"	-	5.6	12	
15-01429-E	30	LED	23"	-	7.0	12	
21-00001-E	28	LED	22"	Class I	2.0	12	
21-00002-E	28	LED	22"	Class I	3.0	12	
21-00003-E	28	LED	22"	Class I	4.0	12	
21-DB001-E	27	LED	10"	Class I	2.0	12	
21-DB002-E	27	LED	10"	Class I	2.0	12	
21-DB003-E	27	LED	10"	Class I	2.0	12	
21-DB004-E	27	LED	10"	Class I	4.0	12	
21-DB005-E	27	LED	10"	Class I	4.0	12	
21-DB006-E	27	LED	10"	Class I	4.0	12	
21-DB007-E	27	LED Dual Color	10"	Class I	4.0	12	
27-00001-E	29	LED	22"	Class I	2.0	12	
27-00002-E	29	LED	22"	Class I	3.0	12	
27-00003-E	29	LED	22"	Class I	4.0	12	
27-DB001-E	27	LED	10"	Class I	6.4	12	
27-DB002-E	27	LED	10"	Class I	6.4	12	
27-DB003-E	27	LED	10"	Class I	6.4	12	