



ATV • UTV • OFF-ROAD
LIGHTING & ACCESSORIES



MPS-RZIRGB
 RGB HALO BT CONTROLLED
POLARIS® RZR EXTREME LED HEADLIGHT



RGB LEADS

▶ 2014-2018

- + White/Red/Green/Pink/RGB
- + 121 different flashing modes: jumping, fading, flashing, dimming, watering and running, etc.
- + RGB angel eye has more than 120 different color change modes
- + App controlled (Car-lights app)
- + 2-piece Polaris® RZR LED headlights (left and right)
- + Compatible with Android® and iOS®
- + Housing color: black/black



MPS-RZILEDH
 LED DRL HALO
POLARIS® RZR EXTREME LED HEADLIGHT


▶ 2014-2018

- + LED white angel eye
- + 2-piece Polaris® RZR LED headlights (left and right)
- + Angel eyes controlled by trigger wire
- + Housing color: black/chrome

COMMON FEATURES

INPUT VOLTAGE: 10-30V DC • **COLOR TEMPERATURE:** 6000K • **HOUSING MATERIAL:** DIE-CAST ALUMINUM • **LED POWER:** 60W HALO RING
LUMEN: 3500LM @ HIGH BEAM / 1800LM @ LOW BEAM • **SOCKET TYPE:** H4 (COMES WITH ADAPTERS)
POWER: 30W/15W 6PCS CREE XTE LED CHIP

RZR HEADLIGHT BRACKET + HARNESS

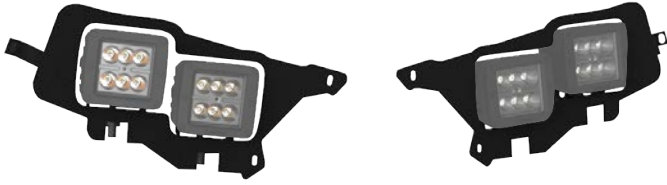

MPS-RZHB1

MOUNTING KIT FOR 4 HEISE CUBE LIGHTS

POLARIS® HEADLIGHT UPGRADE BRACKET

▶ 2014-2018 POLARIS® RZR / GENERAL

- + Headlight mount kit for 4 HEISE cube lights (lights not included)
- + Steel construction
- + Uses OEM mounting and hardware
- + Durable sand grit powder coating
- + Custom wire harness adapters available
- + Sold in pairs




MPS-RZHB2

MOUNTING KIT FOR 4 HEISE CUBE LIGHTS

POLARIS® HEADLIGHT UPGRADE BRACKET

▶ 2008-2017 POLARIS® RZR / RANGER

- + Headlight mount kit for 4 HEISE cube lights (lights not included)
- + Steel construction
- + Uses OEM mounting and hardware
- + Durable sand grit powder coating
- + Custom wire harness adapters available
- + Sold in pairs

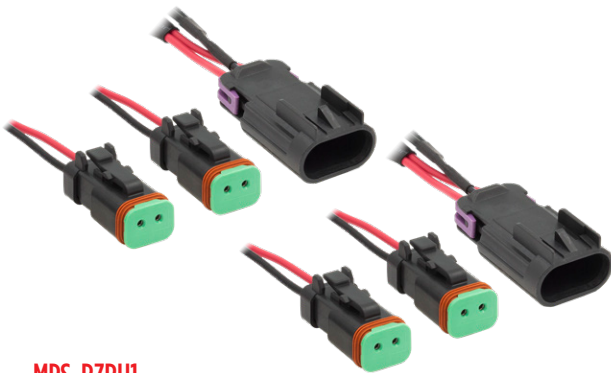


MPS-RZRH1

SEPARATE HIGH & LOW BEAM CONNECTION

POLARIS® HEADLIGHT ADAPTER HARNESS

▶ POLARIS® ATV/UTV WITH STOCK HALOGEN LIGHTS

- + Simple plug-n-play
- + One pair (left & right) four 4-pin Delphi, two (2) Deutsch connectors
- + Compatible with stock halogen headlights

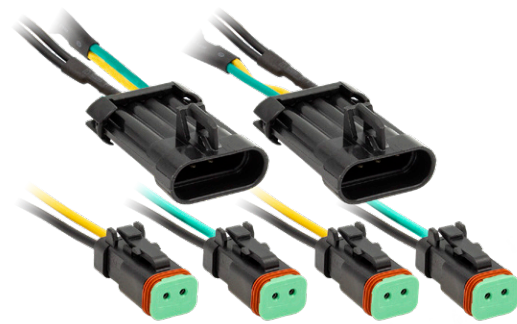

MPS-RZRH1H1

SEPARATE HIGH & LOW BEAM CONNECTION

POLARIS® HEADLIGHT ADAPTER HARNESS

▶ POLARIS® ATV/UTV WITH STOCK LED LIGHTS

- + Simple plug-n-play
- + One pair (left & right) four 4-pin Delphi, two (2) Deutsch connectors
- + Compatible with stock LED headlights

CUBE LIGHTS

HE-CL22PK HIGH OUTPUT 2-CUBE LED LIGHT PACK

▶ 3 INCH ▶ 4 LED

- + Power: 12W
- + Raw lumens: 960lm
- + lux @ 10m: 17
- + Current consumption @ 13.8V: .9A
- + IP rating: IP68
- + Beam pattern: Flood 90°

Heise HE-DLWH1 dual light wiring harness included



HE-CL3S2PK HIGH OUTPUT 2-CUBE LED LIGHT PACK

▶ 3 INCH ▶ 6 LED

- + Power: 18W
- + Raw lumens: 1440lm
- + lux @ 10m: 350
- + Current consumption @ 13.8V: 1.2A
- + IP rating: IP68
- + Beam pattern: Spot 5°

Heise HE-DLWH1 dual light wiring harness included



INPUT VOLTAGE: 10-30V DC • **COLOR TEMPERATURE:** 6000K • **HOUSING MATERIAL:** DIE-CAST ALUMINUM • **COLOR:** BLACK
LENS MATERIAL: POLYCARBONATE • **HARDWARE:** STAINLESS STEEL 316 • **ELECTRONICS:** INTEGRATED-EPOXY ENCAPSULATED
MOUNTING BRACKET: STAINLESS STEEL • **OPERATING TEMPERATURE:** -40°F TO +140°F • **PROTECTION:** REVERSE POLARITY

COMMON FEATURES

LED HEADLIGHT REPLACEMENT BULBS



LED HEADLIGHT

▶ UNIVERSAL

- + 2nd generation LED chipset
- + 6500K color temperature with 3000K & 8000K films
- + 6000lm
- + 25 watts per bulb (single and dual beam kits)
- + IP67 Rated
- + Operating temperature: -40°F to +176°F

SINGLE BEAM KITS

HE-881LED
HE-9005LED

DUAL BEAM KITS

HE-H4LED



HE-H3LED

SINGLE BEAM

FITS POLARIS® SLINGSHOT

▶ 2015-UP*

- + 2nd generation LED chipset
- + 6500K color temperature with 3000K & 8000K films
- + 6000lm
- + 25 watts per bulb
- + IP67 rated
- + Operating temperature: -40°F to +176°F

POLARIS® SLINGSHOT



99-9721

SLINGSHOT RADIO KIT

FITS POLARIS® SLINGSHOT

▶ 2015-UP*

- + Custom textured trim to match the factory finish with a built-in, retractable, smoke-tinted splash guard
- + Designed for Single-DIN and Double-DIN installations
- + Pocket included for Single-DIN installations



72-9701

AFTERMARKET RADIO HARNESS

FITS POLARIS® SLINGSHOT

▶ 2015-UP*

- + 2-pin
- + Sold as pair



72-9702

AFTERMARKET RADIO HARNESS

FITS POLARIS® SLINGSHOT

▶ 2015-UP*

- + 3-pin
- + Sold as pair



AX-SSBACKUP

REVERSE CAMERA RETENTION HARNESS

FITS POLARIS® SLINGSHOT

▶ 2015-UP*

- + Retain reverse camera through RCA
- + For use in Slingshot motorcycles that have reverse cameras



70-9701

SLINGSHOT AFTERMARKET RADIO HARNESS

FITS POLARIS® SLINGSHOT

▶ 2015-UP*

- + 36-pin



BC-SSPWR

REPLACE FACTORY RADIO

FITS POLARIS® SLINGSHOT

▶ 2014-2017

- + T-harness will provide: 12V constant, 12V ignition & ground
- + Made from OEM quality parts
- + Plug-n-play



XSVI-9701-NAV

REPLACE FACTORY RADIO

FITS POLARIS® SLINGSHOT

▶ 2015-UP*

- + Provides NAV outputs (parking brake and reverse)
- + Pre-wired USB retention
- + Pre-wired ASWC-1 harness to retain speed dependent volume control (ASWC-1 sold separately)
- + Micro "B" USB updatable




MPS-RCLOC

AUDIO

ADAPTER

▶ **FITS POLARIS®**

- + Polaris® Ride Command® audio adapter
- + Designed for RZR, Ranger and General with Ride Command® 7" display
- + Retains factory Polaris® Ride Command® as source unit
- + Utilizes built-in crossovers from Ride Command®
- + Harness plugs in to any amp with RCA inputs
- + Works on AMP-1, AMP-2, AMP-3 Ride Command® connectors
- + Includes remote-out to turn on amplifiers

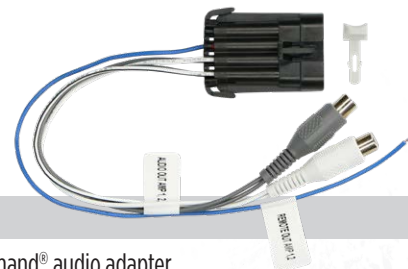

HIGH PERFORMANCE LED LIGHTING

Our LED Lighting Systems are exclusively developed and manufactured to meet all international standards. Our range of lighting integrates advanced thermal management, short circuit and open circuit protection and many other innovative features. All products undergo rigorous testing during the development and manufacturing process and again before leaving the factory. Metra's history, experience and approach to engineering and manufacturing ensure that their products stand out among the competitors and are the highest quality lights available on the market.

Auxiliary driving and fog lights are intended for use solely as auxiliary lighting. They are not intended to be used for headlight purposes, nor are they certified for headlight usage. Auxiliary lights are designed to improve visibility during night time driving and inclement weather. Irresponsible use of any auxiliary light can be dangerous and illegal. Auxiliary driving lights are intended to supplement the high-beam of a standard headlamp system. They are not intended for use alone or with the low-beam of a standard headlamp system. Lighting laws vary from state to state.



MPS-DL IPX5 RATED DOME LIGHT FIXTURE

★ IPX5 ★
CERTIFIED

▶ 6 WATT LED

- + IPX5 rated for RV, marine, ATV/UTV or any vehicle
- + 12 pieces of .5 watt high output/power SMD LEDs
- + Touch control on/off and 10-level dimmer
- + Color temperature: 6000-6500K warm white
- + 50,000 hours of life expectancy



RGB LEDs


MPS-RGBDL IPX5 RATED RGB DOME LIGHT FIXTURE

★ IPX5 ★
CERTIFIED

▶ 6 WATT LED

- + RGB LED with 10ft long cable with micro-DIN connector
- + IPX5 rated for RV, marine, ATV/UTV or any vehicle
- + 8 pieces of RGB SMD LEDs – 5 watts total
- + 50,000 hours of life expectancy
- + Can be used as accent lighting
- + Use with MPS-RGBC-4 RGB LED controller

ACCENT LIGHTING

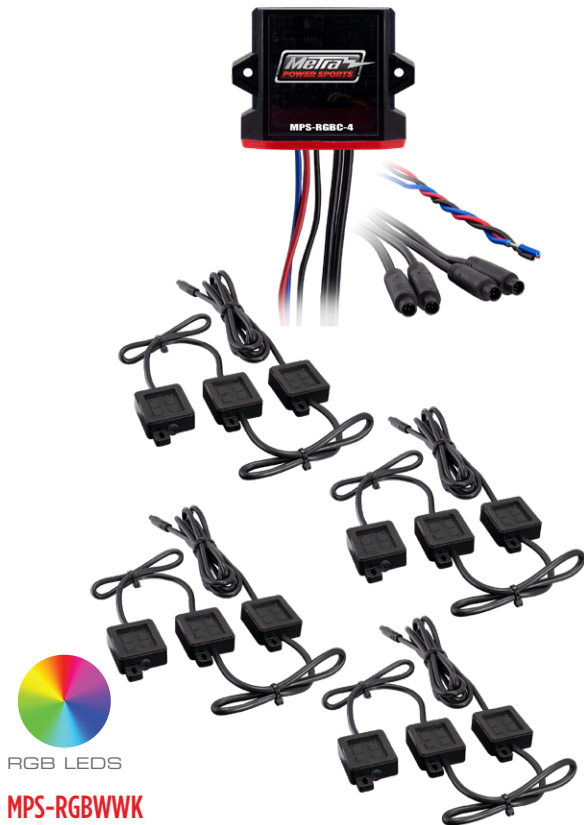

MPS-RGBWWS4 POD LED STRING KIT

▶ 4 ROPES ▶ 12 PODS ▶ 1 CONTROLLER

- + Includes four (4) sets of pod LED string lights, MPS-RGBWWS4
- + Includes one (1) hideaway RGB controller (MPS-RGBC-4)



MPS-RGBC-4 WATER-RESISTANT RGB LED CONTROLLER

▶ 10 SPEEDS | 20 MODES

- + IPX5 water-resistant RGB LED controller via smartphone app (EZ LED)
- + Use EZ LED app to control infinite colors, 10 speeds and 20 dynamic modes - download from App Store or Google Play
- + LED's flash to your music via your smartphone Bluetooth® feature
- + Operational voltage: 12-24V DC
- + Maximum current: 18A
- + App operating range: 60ft (20m) unobstructed
- + Outputs: (4) micro-DIN male connectors
- + Fused power and ground wires for easy connection
- + Use with MPS-RGBWWS4



RGB LEDS

MPS-RGBWWS4 POD LEDS

▶ 1 ROPE ▶ 3 PODS

- + String of 4 LEDs per pod
- + Designed for use in wheel wells or anywhere else that will be getting wet
- + IP68 rated
- + Use with MPS-RGBC-4 (RGB LED controller)

★ IP68 ★
CERTIFIED



RGB LEDS

MPS-YRGB "Y" ADAPTER

▶ 1 MALE TO 2 FEMALES MINI-DIN

- + Allows you to double up the amount of MPS-RGBWWS4 string lights used with the MPS-RGBC-4 (RGB LED controller)
- + 12 inches

★ IPX5 ★
CERTIFIED



RGB LEDS

MPS-ECR6B72 EXTENSION

▶ 6 FOOT (72 INCHES)

- + For use with MPS RGB controller (MPS-RGBC-4) and lighting products

★ IPX5 ★
CERTIFIED



RGB LEDS

MPS-ECR6B36 EXTENSION

▶ 3 FOOT (36 INCHES)

- + For use with MPS RGB controller and lighting products

★ IPX5 ★
CERTIFIED

ACCENT LIGHTING

NEW! MPS-RBSVMS LIGHTED UTV ROLL BAR/CAGE SIDE MIRRORS

► ROLL BAR MOUNTED

- + Aluminum alloy housing designed to withstand the most extreme punishment
- + Anti-glare mirror surface
- + Wide angle viewing (convex)
- + Smoke-colored LED lens



★ IP68 ★
CERTIFIED

- + Universal adjustable brackets fit 1.5" to 2.5" roll bars
- + 9 LEDs each in mirror producing 4500 lumens of white light
- + 1 pair of side mirrors (left & right)
- + 1 wiring harness with relay, fuse and carling switch
- + All necessary hardware included



HE-BALW WHITE HE-BALB BLUE HE-BALR RED HE-BALY YELLOW HE-BALG GREEN HE-BALPP PURPLE BLACK 0.75" ACCENT LIGHT

★ IP65 ★
CERTIFIED

► 3 WATTS

- + Black aluminum accent lights comes in 6 colors: white, blue, red, yellow, green, and purple
- + 3-watt COB LED
- + Great for lighting up foot wells or highlighting installations
- + Sold in pairs



HE-SALW WHITE HE-SALB BLUE HE-SALR RED HE-SALY YELLOW HE-SALG GREEN HE-SALPP PURPLE SILVER 0.75" ACCENT LIGHT

★ IP65 ★
CERTIFIED

► 3 WATTS

- + Silver aluminum accent lights comes in 6 colors: white, blue, red, yellow, green, and purple
- + 3-watt COB LED
- + Great for lighting up foot wells or highlighting installations
- + Sold in pairs



WHIPS



NEW! MPS-RGBWHIP4-1 LED RGB WHIPS

Actual color tones may vary

▶ 4 FOOT ▶ RF REMOTE

- + Long life 5050 RGB LEDs
- + Mount on any off-road vehicle: ATVs/UTVs, Jeeps, trucks, etc
- + Easy to install/uninstall with quick release mounting base
- + Included orange flag and mounts for safety

SPECS:

- + Controlled by RF remote (included)
- + IPX5 rating
- + Operating voltage: 9-16 volts DC
- + 147 LEDs / 60 per meter / 3A
- + Tube length: 4ft (1.2m) - Material: reinforced polycarbonate
- + LED life: 50,000 hours
- + Base: milled aluminum, black anodized, quick release design



NEW! MPS-RGBWHIP6-1 LED RGB WHIPS


Actual color tones may vary

▶ 6 FOOT ▶ RF REMOTE

- + Long life 5050 RGB LEDs
- + Mount on any off-road vehicle: ATVs/UTVs, Jeeps, trucks, etc
- + Easy to install/uninstall with quick release mounting base
- + Included orange flag and mounts for safety

SPECS:

- + Controlled by RF remote (included)
- + IPX5 rating
- + Operating voltage: 9-17 volts DC
- + 227 LEDs / 60 per meter / 4A
- + Tube length: 6ft (1.8m) - Material: reinforced polycarbonate
- + LED life: 50,000 hours
- + Base: milled aluminum, black anodized, quick release design

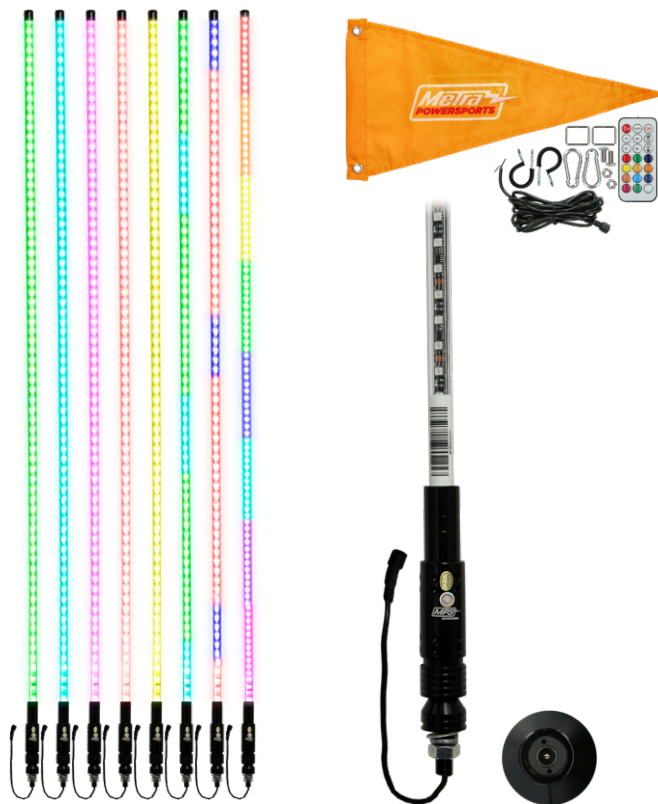

NEW! MPS-CRWBWHIP4
DANCING LED RGB WHIPS

Actual color tones may vary

▶ **4 FOOT** ▶ **RF REMOTE**

- + Long life 5050 RGB LEDs
- + Mount on any off-road vehicle: ATVs/UTVs, Jeeps, trucks, etc
- + Easy to install/uninstall with quick release mounting base
- + Included orange flag and mounts for safety

SPECS:

- + Controlled by RF remote (included)
- + IPX5 rating
- + Operating voltage: 9-16 volts DC
- + 147 LEDs / 60 per meter / 3A
- + Tube length: 4ft (1.2m) - Material: reinforced polycarbonate
- + LED life: 50,000 hours
- + Base: milled aluminum, black anodized, quick release design



NEW! MPS-CRWBWHIP6
DANCING LED RGB WHIPS

Actual color tones may vary

▶ **6 FOOT** ▶ **RF REMOTE**

- + Long life 5050 RGB LEDs
- + Mount on any off-road vehicle: ATVs/UTVs, Jeeps, trucks, etc
- + Easy to install/uninstall with quick release mounting base
- + Included orange flag and mounts for safety

SPECS:

- + Controlled by RF remote (included)
- + IPX5 rating
- + Operating voltage: 9-16 volts DC
- + 227 LEDs / 60 per meter / 4A
- + Tube length: 6ft (1.8m) - Material: reinforced polycarbonate
- + LED life: 50,000 hours
- + Base: milled aluminum, black anodized, quick release design

WHIPS



NEW! MPS-FORGBWHIP4 FIBER OPTIC RGB WHIPS

Actual color tones may vary

▶ 4 FOOT ▶ SMART PHONE

- + Long life 5050 RGB LEDs
- + 20 preset static colors and more than 30 eye-catching patterns
- + Mount on any off-road vehicle: ATVs/UTVs, Jeeps, trucks, etc.
- + Easy to install/uninstall with quick release mounting base
- + Included orange flag and mounts for safety

SPECS:

- + Single SMD RGB LED with a fiber optic insert
- + Controlled by RF remote (included)
- + IP67 rating
- + Operating voltage: 9-16 volts DC
- + Tube length: 4ft (1.2m) - Material: reinforced polycarbonate
- + LED life: 50,000 hours
- + Base: milled aluminum, black anodized, quick release design



NEW! MPS-FORGBWHIP6 FIBER OPTIC RGB WHIPS

Actual color tones may vary

▶ 6 FOOT ▶ SMART PHONE

- + Long life 5050 RGB LEDs
- + 20 preset static colors and more than 30 eye-catching patterns
- + Mount on any off-road vehicle: ATVs/UTVs, Jeeps, trucks, etc.
- + Easy to install/uninstall with quick release mounting base
- + Included orange flag and mounts for safety

SPECS:

- + Single SMD RGB LED with a fiber optic insert
- + Controlled by RF remote (included)
- + IP67 rating
- + Operating voltage: 9-16 volts DC
- + Tube length: 6ft (1.8m) - Material: reinforced polycarbonate
- + LED life: 50,000 hours
- + Base: milled aluminum, black anodized, quick release design

SINGLE COLOR WHIPS

SINGLE COLOR FIBER OPTIC WHIPS



	4 FOOT	6 FOOT
BLUE	MPS-FOBWHIP4	MPS-FOBWHIP6
GREEN	MPS-FOGWHIP4	MPS-FOGWHIP6
ORANGE	MPS-FOOWHIP4	MPS-FOOWHIP6
RED	MPS-FORWHIP4	MPS-FORWHIP6
WHITE	MPS-FOWWHIP4	MPS-FOWWHIP6

► 5 COLORS

- + Polycarbonate cover is virtually unbreakable
- + Flag included
- + Detachable base



SINGLE COLOR LED WHIPS



	4 FOOT	6 FOOT
BLUE	MPS-BWHIP4	MPS-BWHIP6
GREEN	MPS-GWHIP4	MPS-GWHIP6
ORANGE	MPS-OWHIP4	MPS-OWHIP6
PINK	MPS-PWHIP4	MPS-PWHIP6
RED	MPS-RWHIP4	MPS-RWHIP6
WHITE	MPS-WWHIP4	MPS-WWHIP6

► 6 COLORS

- + Polycarbonate cover is virtually unbreakable
- + Flag included
- + Detachable base




MPS-WHIPM

DESIGNED TO WORK WITH ROLL CAGES

WHIP MOUNT

► COMES WITH 1.5", 1.75", 1.875" & 2" RUBBER INSERTS

- + Whip antenna mount for roll cages
- + Milled aluminum
- + Powder coated gloss black
- + Adjusts to fit most angles

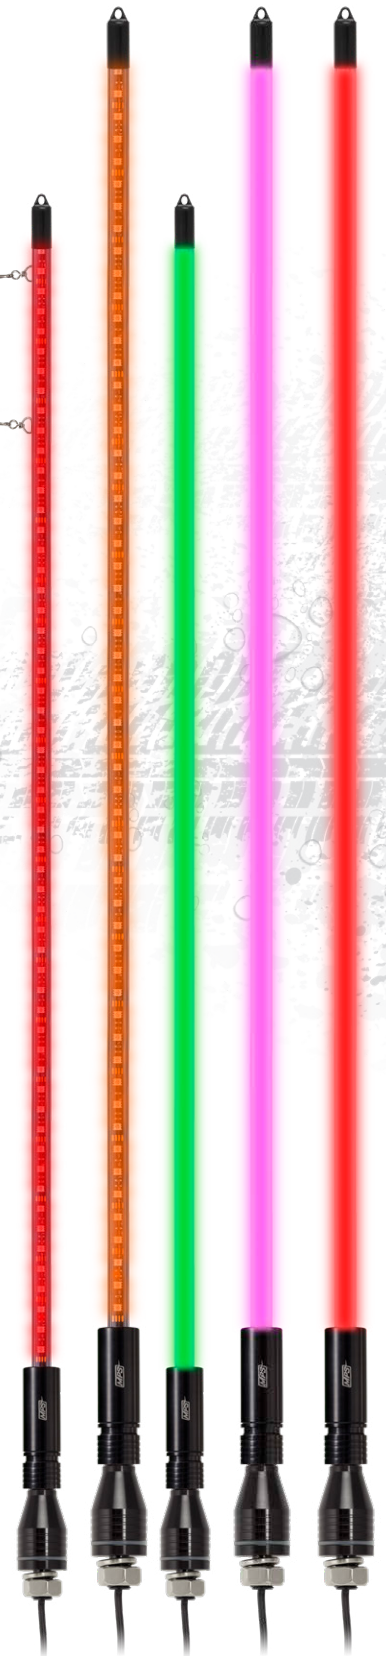

Actual color tones may vary

SWITCH PANEL



NEW! HE-SWP8

► 8 GANG SWITCH PANEL

This 8-gauge switch panel system allows you to control 8 auxiliary LED lights or electrical devices. You can now customize your switch panel according to your needs with 50 switch stickers, blue LED lights for back lighting and multi-position installation (2 brackets for panel, 1 bracket for control box, 60 amp circuit breaker and 7-gauge tinned copper battery cables).

FEATURES

- + Switched or momentary activation
- + 8 gang switch panel
- + Control box with cover
- + 50 switch labels
- + 60 amp resettable circuit breaker
- + 6 extra fuses
- + Power harness
- + Battery cables
- + 2 switch panel brackets
- + 1 control box bracket
- + Mounting hardware, screws and zip ties included

SPECS

- + Input voltage: 12V-24V
- + Power handling: 600W - 1200W
- + Maximum current: 60A
- + Panel material: Die-cast aluminum
- + Control box material: Die-cast aluminum
- + Control box cover: ABS plastic
- + Operating temperature: -40°F to +302°F
- + Panel size: 4.53" x 0.59" x 2.60"
- + Circuit box size: 7.48" x 1.34" x 4.13"



**NEW! HE-RACBAR
LED LIGHTBAR**

▶ 30 INCH ▶ 56 LED

- + Wattage: 24W
- + Current consumption @ 13.8V: 1.75A
- + IP rating: IP65
- + Input voltage: 12-14 DC
- + Color configuration: Red/Blue/Amber/Amber/Blue/Red
- + Functions:
 - Red – brake/running lights
 - Blue – slow moving caution lights
 - Amber – hazard lights
- + Flash patterns:
 - Blue – 1 pattern
 - Amber – 22 selectable patterns
- + Beam pattern: Flood
- + Housing material: Die-cast aluminum
- + Housing color: Black
- + Lens Material: Polycarbonate
- + Electronics: Integrated-epoxy encapsulated
- + Hardware: Aluminum
- + Operating Temperature: -40°F to +140°F
- + Protection: Reverse polarity
- + Hole dimensions: Bracket turned in: 39.25" / brackets turned out: 41.50"
- + Height of lightbar: 4.8"
- + Depth of lightbar: 3.50"

**NEW! HE-HDRS8
DUAL ROW LED LIGHTBAR**

▶ 9.2 INCH ▶ 12 LED

- + Length: 9.2"
- + Wattage: 48W
- + Raw lumens: 4760lm
- + Current consumption @ 13.8V: 3.58A



9.2"W x 3.07"H x 2.28"D

**NEW! HE-HDRS14
DUAL ROW LED LIGHTBAR**

▶ 15.2 INCH ▶ 24 LED

- + Length: 15.2"
- + Wattage: 84W
- + Raw lumens: 8000lm
- + Current consumption @ 13.8V: 5.58A



15.16"W x 3.07"H x 2.28"D

**NEW! HE-HDRS22
DUAL ROW LED LIGHTBAR**

▶ 23.2 INCH ▶ 40 LED

- + Length: 23.2"
- + Wattage: 132W
- + Raw lumens: 12320lm
- + Current consumption @ 13.8V: 9.58A



23.19"W x 3.07"H x 2.28"D

INPUT VOLTAGE: 10-30V DC • **COLOR TEMPERATURE:** 6000K • **HOUSING MATERIAL:** DIE-CAST ALUMINUM • **LENS MATERIAL:** POLYCARBONATE
MEMBRANE: MILITARY BREATHER • **HARDWARE:** ALUMINUM • **ELECTRONICS:** INTEGRATED-EPOXY ENCAPSULATED • **IP RATING:** IP67
BEAM PATTERN: COMBO – FLOOD 90° AND SPOT 8° • **OPERATING TEMPERATURE:** -40°F TO +140°F • **PROTECTION:** REVERSE POLARITY

COMMON FEATURES

RGB LIGHTBARS



HE-CBRGB RGB CONTROL BOX

★ IP68 ★
CERTIFIED



▶ 8 OUTPUT

- + Control box for RGB lights
- + Water-resistant control box
- + Control box can be mounted in the engine compartment
- + Required for RGB functionality on all Infinite Series lights (sold separately)



7.5"W x 4.8"H

HE-INFIN8 STRAIGHT INFINITE LED LIGHTBAR



▶ 8 INCH ▶ 12 LED

- + Wattage: 18W
- + Raw lumens: 2280lm
- + Lux @ 10M: 235
- + Current consumption @ 13.8V: 1.3A
- + IP rating: IP67
- + Hole dimensions: Bracket turned in: 7.25" / brackets turned out: 9.5"



21.5"W x 4.8"H

HE-INFIN22 STRAIGHT INFINITE DUAL ROW LED LIGHTBAR



▶ 22 INCH ▶ 40 LED

- + Wattage: 60W
- + Raw Lumens: 7600lm
- + Lux @ 10M: 1150
- + Current consumption @ 13.8V: 4.34A
- + IP rating: IP67
- + Hole dimensions: Bracket turned in: 21.25" / brackets turned out: 23.5"



29.5"W x 4.8"H

HE-INFIN30 STRAIGHT INFINITE DUAL ROW LED LIGHTBAR



▶ 30 INCH ▶ 56 LED

- + Wattage: 84W
- + Raw Lumens: 10640lm
- + Lux @ 10M: 1426
- + Current consumption @ 13.8V: 6.1A
- + IP rating: IP67
- + Hole dimensions: Bracket turned in: 29.25" / brackets turned out: 31.50"



39.5"W x 4.8"H

HE-INFIN40 STRAIGHT INFINITE DUAL ROW LED LIGHTBAR



▶ 40 INCH ▶ 76 LED

- + Wattage: 114W
- + Raw Lumens: 14440lm
- + Lux @ 10M: 1780
- + Current consumption @ 13.8V: 9.5A
- + IP rating: IP67
- + Hole dimensions: Bracket turned in: 39.25" / Brackets turned out: 41.50"
- + Height of lightbar: 4.8"
- + Depth of lightbar: 3.50"

COMMON FEATURES

INPUT VOLTAGE: 10-30V DC • COLOR TEMPERATURE: 6000K • HOUSING MATERIAL: DIE-CAST ALUMINUM • BEAM PATTERN: SPOT 8°
MEMBRANE: MILITARY BREATHER • LENS MATERIAL: PC • MOUNTING BOLT DRILL: 0.25" • HEIGHT OF LIGHTBAR: 4.8" • DEPTH OF LIGHTBAR: 3.50"
ELECTRONICS: INTEGRATED-EPOXY ENCAPSULATED • HARDWARE: STAINLESS 316 • OPERATING TEMP: -40°F TO +140°F • PROTECTION: REVERSE POLARITY



**HE-WL1
LED LIGHT**

3.75"W x 3"H x .75"D

▶ 3.625x2 INCH ▶ 33 LED

- + Wattage: 6.6W
- + Raw lumens: 726lm
- + lux @ 10m: 17
- + Beam pattern: Flood 120°
- + Current consumption @ 13.8V: 3A
- + Lens design: Unique waffle



**HE-WL1M
LED LIGHT**

3.75" x 3" H x .75" D

▶ 3.625x2 INCH ▶ 33 LED

- + Wattage: 6.6W
- + Raw lumens: 726lm
- + lux @ 10m: 17
- + Beam pattern: Flood 120°
- + Current consumption @ 13.8V: 3A
- + Lens design: Unique waffle

Modular design allows multiple lights to be connected together to form one long light



**HE-WL2
LED LIGHT**

3.50"W x 2.50"H x 2.50"D

▶ 3.625x1.75 INCH ▶ 2 LED

- + Wattage: 10W
- + Raw lumens: 800lm
- + lux @ 10m: 28
- + Beam pattern: Flood 90°
- + Current consumption @ 13.8V: 4A



**HE-WL3
LED LIGHT**

4.75"W x 6"H x 4.50"D

▶ 4.75 INCH ▶ 9 LED

- + Wattage: 90W
- + Raw lumens: 7200lm
- + lux @ 10m: 35
- + Beam pattern: Flood 90°
- + Current consumption @ 13.8V: 4.6A

Modular design allows multiple lights to be connected together to form one long light

INPUT VOLTAGE: 10-30V DC • COLOR TEMPERATURE: 6000K • HOUSING MATERIAL: DIE-CAST ALUMINUM • COLOR: BLACK
 LENS MATERIAL: PC • MOUNTING BOLT DRILL: 0.25" • MOUNTING BRACKET: DIE-CAST ALUMINUM
 ELECTRONICS: INTEGRATED-EPOXY ENCAPSULATED • HARDWARE: STAINLESS 316 • IP RATING: IP67 • PROTECTION: REVERSE POLARITY

COMMON FEATURES

ACCESSORY LIGHTING



HE-PL1 DUAL ROW WITH MAGNETIC BASE

▶ 6x6.5 INCH ▶ 6 LED

- + Wattage: 60W
- + Raw lumens: 726lm
- + lux @ 10m: 28.5
- + Beam pattern: Flood 60°
- + Housing material: Die-cast aluminum
- + Housing color: Black
- + Lens material: PC
- + Water-resistant: IP65
- + Mounting bracket: Die-cast aluminum
- + Hardware: Stainless 316
- + Battery certificate: UL, UN38.3



9"W x 11.375"H x 2.5"D

HE-DL5 ROUND DRIVING LED LIGHTS

▶ 9 INCH ▶ 25 LED

- + Input voltage: 10-30V DC
- + Color temperature: 6000K
- + Beam pattern: Spot 26°
- + Housing material: Die-cast aluminum
- + Color: Black
- + Membrane: Gore™
- + Lens material: PC
- + Mounting bracket: Stainless steel
- + Electronics: Integrated-epoxy encapsulated
- + Hardware: Stainless 316
- + Operating temperature: -40°F to +140°F
- + Protection: Reverse polarity
- + IP rating: IP67
- + Wattage: 75W
- + Raw lumens: 6000lm
- + lux @ 10m: 940
- + Current consumption @ 13.8v: 4.4A
- + Hole dimensions: Mounting bolt drill - 0.375"

CUBE LIGHTS




HE-HCL1402PK HIGH OUTPUT CUBE LED LIGHT 2 PACK

▶ 4 INCH ▶ 15 LED

- + Wattage: 30W
- + Raw lumens: 2850lm
- + lux @ 10m: 122
- + Current consumption @ 13.8V: 2.2A
- + IP rating: IP67
- + Beam pattern: Flood 140° and Spot 15°

Heise HE-DLWH1 dual light wiring harness included




HE-ICL2PK HIGH OUTPUT CUBE RGB LED LIGHT 2 PACK

▶ 3 INCH ▶ 4 LED

- + Wattage: 13W
- + Raw lumens: 1080lm
- + lux @ 10m: 411
- + Current consumption @ 13.8V: 0.9A
- + IP rating: IP67
- + Beam pattern: Spot 5°

Heise HE-DLWH1 dual light wiring harness included




HE-HCL22PK HIGH OUTPUT CUBE LED LIGHT 2 PACK

▶ 3 INCH ▶ 4 LED

- + Wattage: 12W
- + Raw lumens: 960lm
- + lux @ 10m: 32
- + Current consumption @ 13.8V: 0.7A
- + IP rating: IP68
- + Beam pattern: Flood 90°

Heise HE-DLWH1 dual light wiring harness included



NEW! DL-CL1 HIGH OUTPUT CUBE LED LIGHT 2 PACK

▶ 4 INCH ▶ 6 LED

- + Wattage*: 36W
- + Raw lumens*: 2520lm
- + Current consumption @ 13.8V*: 2.6A
- + IP rating: IP67
- + Beam pattern: Flood 90°

**Total value for set of two lights*

INPUT VOLTAGE: 10-30V DC • COLOR TEMPERATURE: 6000K • HOUSING MATERIAL: DIE-CAST ALUMINUM • COLOR: BLACK
LENS MATERIAL: PC • MOUNTING BRACKET: STAINLESS STEEL • ELECTRONICS: INTEGRATED-EPOXY ENCAPSULATED
HARDWARE: STAINLESS 316 • OPERATING TEMP: -40°F TO +140°F • PROTECTION: REVERSE POLARITY

COMMON FEATURES

DAYTONA LIGHTS™ LIGHTBARS

NEW! DL-DR8

▶ 8 INCH ▶ 12 LED

- + Wattage: 36W
- + Raw lumens: 2160lm
- + Current consumption @ 13.8V: 2.6 A



3.4375"D x 3.0625"H (bar only)

NEW! DL-DR14

▶ 13.5 INCH ▶ 24 LED

- + Wattage: 72W
- + Raw lumens: 4320lm
- + Current consumption @ 13.8V: 5.2 A



3.4375"D x 3.0625"H (bar only)

NEW! DL-DR22

▶ 22 INCH ▶ 40 LED

- + Wattage: 120W
- + Raw lumens: 7200lm
- + Current consumption @ 13.8V: 8.7 A



3.4375"D x 3.0625"H (bar only)

NEW! DL-DR32

▶ 32 INCH ▶ 60 LED

- + Wattage: 180W
- + Raw lumens: 10800lm
- + Current consumption @ 13.8V: 13.1 A



3.4375"D x 3.0625"H (bar only)

NEW! DL-DR42

▶ 42 INCH ▶ 80 LED

- + Wattage: 240W
- + Raw lumens: 14400lm
- + Current consumption @ 13.8V: 17.4 A



3.4375"D x 3.0625"H (bar only)

NEW! DL-DR50

▶ 50 INCH ▶ 96 LED

- + Wattage: 288W
- + Raw lumens: 17280lm
- + Current consumption @ 13.8V: 20.9 A



3.4375"D x 3.0625"H (bar only)

NEW! DL-DR52

▶ 52 INCH ▶ 100 LED

- + Wattage: 300W
- + Raw lumens: 18000lm
- + Current consumption @ 13.8V: 21.8 A



3.4375"D x 3.0625"H (bar only)

COMMON FEATURES

INPUT VOLTAGE: 10-30V DC • **COLOR TEMPERATURE:** 6000K • **HOUSING MATERIAL:** DIE-CAST ALUMINUM • **COLOR:** BLACK
BEAM PATTERN: COMBO - FLOOD 90° AND SPOT 8° • **MEMBRANE:** MILITARY BREATHER • **LENS MATERIAL:** PC • **IP RATING:** IP67
ELECTRONICS: INTEGRATED-EPOXY ENCAPSULATED • **HARDWARE:** STAINLESS STEEL • **OPERATING TEMP:** -40°F TO +140°F • **PROTECTION:** REVERSE POLARITY

NEW! DL-US725

▶ **8 INCH** ▶ **6 LED**

- + Wattage: 18W
- + Raw lumens: 1080lm
- + Current consumption @ 13.8V: 1.3 A



1.75" L x 1.0625" H (bar only)

NEW! DL-US135

▶ **13.5 INCH** ▶ **12 LED**

- + Wattage: 36W
- + Raw lumens: 2160lm
- + Current consumption @ 13.8V: 2.6 A



1.75" L x 1.0625" H (bar only)

NEW! DL-US195

▶ **19.5 INCH** ▶ **18 LED**

- + Wattage: 54W
- + Raw lumens: 3240lm
- + Current consumption @ 13.8V: 3.9 A



1.75" L x 1.0625" H (bar only)

NEW! DL-US32

▶ **32 INCH** ▶ **60 LED**

- + Wattage: 90W
- + Raw lumens: 5400lm
- + Current consumption @ 13.8V: 6.5 A



1.75" L x 1.0625" H (bar only)

NEW! DL-US4425

▶ **44.25 INCH** ▶ **42 LED**

- + Wattage: 126W
- + Raw lumens: 7560lm
- + Current consumption @ 13.8V: 9.2 A



1.75" L x 1.0625" H (bar only)

NEW! DL-US5025

▶ **50.25 INCH** ▶ **48 LED**

- + Wattage: 144W
- + Raw lumens: 8640lm
- + Current Consumption @ 13.8V: 10.5 A



1.75" L x 1.0625" H (bar only)

INPUT VOLTAGE: 10-30V DC • **COLOR TEMPERATURE:** 6000K • **HOUSING MATERIAL:** DIE-CAST ALUMINUM • **BEAM PATTERN:** SPOT 8°
MEMBRANE: MILITARY BREATHER • **LENS MATERIAL:** PC • **IP RATING:** IP67 • **ELECTRONICS:** INTEGRATED-EPOXY ENCAPSULATED
HARDWARE: STAINLESS STEEL • **OPERATING TEMP:** -40°F TO +140°F • **PROTECTION:** REVERSE POLARITY

COMMON FEATURES



ROLL BAR MOUNTS



HE-RBM75 .75 INCH



HE-RBM1 1 INCH



HE-RBM125 1.25 INCH



HE-RBM150 1.5 INCH



HE-RBM175 1.75 INCH



HE-RBM2 2 INCH



HE-RBM225 2.25 INCH



HE-RBM250 2.5 INCH



HE-RBM275 2.75 INCH



HE-RBM3 3 INCH

HEISE ROLL BAR MOUNTS

► UNIVERSAL

- + Black plated aluminum to be attractive and strong
- + Rubber gasket included to protect the roll bar
- + Use with lightbars, driving and work lights

- + Allen keys included
- + Bulk parts are available
- + 2-pack

MPS-C02 3 INCH


MPS-C03 1.5 INCH

MPS-C04 2 INCH

ROLL BAR MOUNT

► UNIVERSAL

- + Multiple applications
- + Powder coated black
- + Rubber insert

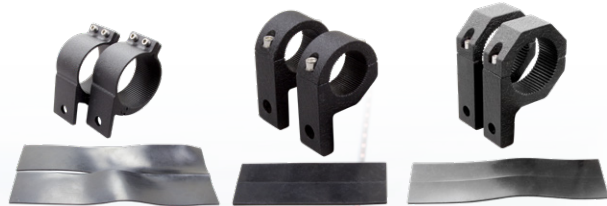



NEW! MPS-B01
UNIVERSAL LIGHTBAR BRACKET

▶ 8 INCH



NEW! MPS-B03
UNIVERSAL LIGHTBAR BRACKET

▶ 32 INCH



NEW! MPS-B06
SIDE PILLAR LIGHT BRACKET

▶ HONDA | POLARIS | YAMAHA*

- + Fits cube or round work lights
- + 2"-4" spot/work light
- + Sold as pair



NEW! MPS-B08
ROOF LIGHT BRACKET

▶ YAMAHA YXZ 1000R*

- + 40"-42" lightbar
- + Sold as pair



NEW! MPS-B10
ROLL CAGE LIGHTBAR BRACKET

▶ YAMAHA YXZ 1000R*

- + Holds 50" lightbar
- + Sold as pair

LIGHTBAR BRACKETS



NEW! MPS-B02
UNIVERSAL LIGHTBAR BRACKET

▶ 22 INCH



NEW! MPS-B05
SIDE PILLAR LIGHT BRACKET

▶ 2011-2014 POLARIS RZR 900*

- + Fits cube or round work lights
- + 2"-4" spot/work light
- + Sold as pair



NEW! MPS-B07
SIDE PILLAR LIGHT BRACKET

▶ 2016-UP* YAMAHA YXZ 1000R*

- + 2"-4" spot/work light
- + Sold as pair



NEW! MPS-B09
ROLL CAGE LIGHTBAR BRACKET

▶ HONDA | POLARIS | YAMAHA*

- + Holds 30"-32" lightbar
- + Sold as pair



NEW! MPS-B11
DUAL LIGHT POD

▶ 2014-UP* POLARIS RZR XP 1000 900 800*

- + Fits cube or round work lights
- + 2"-4" spot/work light
- + Sold as pair



SPEAKER & ACCESSORIES



NEW! MPS-SBSMP3 WATER-RESISTANT BLUETOOTH® SPEAKER

▶ UNIVERSAL

- + Blue LED back-lit control panel 3"x2", with IP66 water-resistant rating
- + Built-in FM radio tuner, with auto search and save
- + USB input to play MP3/WMA/WAV music with 1 amp device charging
- + Pair of 3" water-resistant speakers included, peak stereo output power: 2 x 20W
- + Suitable for DC 12V UTV, motorcycles and electric vehicles



MPS-35USBV DIGITAL VOLTMETER

▶ DIGITAL

- + Snap-in panel with 3.5/USB/voltmeter
- + Provides 2.1A 5-volt charging
- + Can be used with MPS-BTK
- + 3.5mm is pass through


OVERHEAD CONSOLE



MPS-RZROHC SINGLE-DIN OVERHEAD CONSOLE

▶ FITS POLARIS®

- + Mounts to Polaris® UTVs with hard top roofs
- + Made from durable ABS plastic
- + 2 speaker cutouts for 6.5" - 6.75" speakers
- + Single and Double-DIN radio templates included
- + Will accommodate: Single-DIN radios/Double-DIN radios, marine media units, Bluetooth® receivers, gauges, dome lights, switches, etc.
- + Mounting hardware included

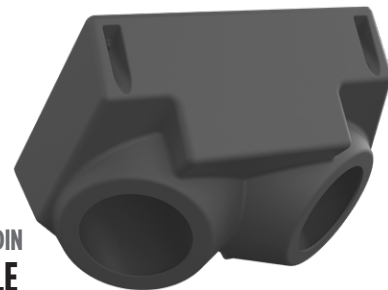

OH-UNIO2 SINGLE-DIN AND DOUBLE-DIN OVERHEAD CONSOLE

▶ UNIVERSAL

- + Made from durable ABS plastic
- + 2 speaker cutouts for 6.5" - 6.75" speakers
- + Single and Double-DIN radio templates included
- + Will accommodate: Single-DIN radios/Double-DIN radios, marine media units, Bluetooth® receivers, gauges, dome lights, switches, etc.
- + Mounting hardware included



OH-UNIO1/OH-DINO1 SINGLE-DIN OVERHEAD CONSOLE

▶ UNIVERSAL

- + Easy install
- + Automotive/marine grade ABS with UV
- + Single-DIN opening or without for customized gauge mount
- + Water-resistant
- + Accommodates one radio device and two speakers
- + Paintable for custom install
- + OH-DINO1 has Single-DIN radio cut out

Single-DIN radio opening



OH-DINO1

No radio opening



OH-UNIO1



SK-BTX9-BS
AGM (ABSORBED GLASS MAT) TECHNOLOGY
12V BATTERY

▶ **125 CRANK AMPS** ▶ **8 AMP HOURS**

- + Fits JIS battery type BTX9-BS applications
- + Will replace OE battery in Kawasaki, Suzuki and others

W 5.88"/149MM **H** 4.13"/105MM
D 3.44"/87MM **6.8LBS/3.1KG**



SK-BTX12-BS
AGM (ABSORBED GLASS MAT) TECHNOLOGY
12V BATTERY

▶ **180 CRANK AMPS** ▶ **10 AMP HOURS**

- + Fits JIS battery type BTX12-BS applications
- + Will replace OE battery in Honda, Suzuki, Aprilia and others

W 5.88"/149MM **H** 5.13"/130MM
D 3.5"/89MM **9LBS/4.1KG**



SK-BTX14-BS
AGM (ABSORBED GLASS MAT) TECHNOLOGY
12V BATTERY

▶ **230 CRANK AMPS** ▶ **12 AMP HOURS**

- + Fits JIS battery type BTX14-BS applications
- + Will replace OE battery in BMW, Honda, Kawasaki and others

W 5.88"/149MM **H** 5.75"/146MM
D 3.44"/87MM **10.4LBS/4.7KG**



SK-BTX20L-BS
AGM (ABSORBED GLASS MAT) TECHNOLOGY
12V BATTERY

▶ **310 CRANK AMPS** ▶ **18 AMP HOURS**

- + Fits JIS battery type BTX20L-BS applications
- + Will replace OE battery in Buell, Harley, Honda, Triumph and others

W 6.88"/175MM **H** 6.13"/156MM
D 3.44"/87MM **15.2LBS/6.9KG**



SK-BTX30L
AGM (ABSORBED GLASS MAT) TECHNOLOGY
12V BATTERY

▶ **420 CRANK AMPS** ▶ **30 AMP HOURS**

- + Fits JIS battery type BTX30L-BS applications
- + Will replace OE battery in Harley, Artic Cat, Polaris and others

W 6.56"/167MM **H** 5.88"/175MM
D 5.16"/131MM **22.9LBS/10.4KG**

ONE TOUGH BATTERY

Shuriken® offers batteries for powersports, motorcycle, ATV, marine and RV applications. These batteries are designed to fit all of the most popular applications based on today's BCI and JIS fitment standards. Perfect for replacing factory batteries in most powersports applications.

The Power Cells are extremely resistant to excessive heat and strong vibration. With super-low ESR and closely packed pure lead plates, each power cell packs a punch. Shuriken® Power Cells are designed to deliver the constant voltage needed for optimum performance. These batteries all use absorbed glass mat (AGM) technology and are fully charged, ready to use direct from the factory. They are non-spillable and maintenance free. Because of the AGM design, they can be discharged and recharged hundreds of times with a one-year replacement warranty.

COMMON FEATURES

FACTORY ACTIVATED READY FOR USE

SAFETY



★ IP67 ★
CERTIFIED



TE-DVR-PS DUAL CHANNEL WATER-RESISTANT DVR

► UNIVERSAL

- + Two cameras included for front and rear recording with 2 mounting options: flush mount and bullet mount
- + WiFi app for playback viewing
- + Viewing angle: 150°
- + G-sensor built-in for collision detection
- + Resolution: 1920 X 1080 @ 30 FPS + Max MicroSD: 128gb (sold separately)
- + IP67 for both cameras and control box



★ IP67 ★
CERTIFIED

TE-DVR-PSEXT TE-DVR-PS REAR EXTENSION CABLE

► UNIVERSAL

- + Extension cable used for ONLY extending the rear camera on the TE-DVR-PS
- + 26' in length
- + IP67 connectors



★ IP67 ★
CERTIFIED

MOUNTING
OPTIONS

TE-SBC SMALL BULLET CAMERA

► UNIVERSAL

- + Includes flush mount fit with hole saw
- + 170° viewing angle
- + IP67 rated



TE-RBM ROLL BAR MOUNT FOR REARVIEW MIRROR

► UNIVERSAL

- + Roll bar mount for rearview mirror + Kit includes 3 rings, 1.5", 1.75" & 2" for different diameter roll bars + Unique L bracket provides a standard mirror base + Compatible with most mirrors + Durable powder coat finish for off-road applications



★ IP69 ★
CERTIFIED

MPS-WRM45 WATER-RESISTANT REARVIEW MIRROR/MONITOR

► 4.5" DIGITAL COLOR LCD

- + Replacement rearview mirror with integrated 4.5" digital color LCD screen
- + Fits roll bar mount: TE-RBM + IP69 + Water-resistant monitor
- + 2 video inputs: rearview camera input and second video input

CAMERA & ACCESSORIES



★ IP67 ★
CERTIFIED



TE-CCM HEAVY-DUTY NIGHT VISION

▶ CAMERA + MICROPHONE

- + High quality metal housing
- + Built-in microphone
- + 0 lux night vision / 18 IR LEDs
- + IP67 rated



★ IP69 ★
CERTIFIED



TE-CCS HEAVY-DUTY NIGHT VISION

▶ SIDE-VIEW CAMERA

- + High quality metal housing
- + 0 lux night vision / 18 IR LEDs
- + IP69K rated

SURFACE MOUNT • LARGE VEHICLE • NIGHT VISION • 120° VIEWING ANGLE • REAR MOUNTING • EXTENSION CABLE NOT INCLUDED

COMMON FEATURES



TE-HEX10 EXTENSION CABLE

▶ 32 FOOT ▶ HD 4-PIN DIN

- + HD extension cable for HD commercial cameras
- + 4-pin DIN connectors
- + 10m / 32.8ft



TE-HEX20 EXTENSION CABLE

▶ 65 FOOT ▶ HD 4-PIN DIN

- + HD extension cable for HD commercial cameras
- + 4-pin DIN connectors
- + 20m / 65.6ft



TE-DVR-W HD WINDOW MOUNT

▶ DASH CAM

- + 1080P HD resolution videos and photos + WiFi connects to mobile app for viewing
- + Press one button for quick photo + Can be used forward or rear facing
- + Supports up to 32gb microSD card (sold separately)
- + G-force sensor detects collisions & locks video from being overwritten
- + Plugs into standard 12v outlet



TE-7VS-4 7" VIDEO SCREEN

▶ LCD SCREEN

- + 7" Monitor with Quad Camera Input
- + 7" color LCD screen
- + Display 1 to 4 cameras simultaneously
- + Multiple display layouts
- + 4-Pin DIN camera input connectors
- + Compatible with TE-WTR wireless camera kit
- + Includes remote control
- + Built-in speaker for audio from camera

TRAILER LED LIGHTS



NEW! HE-TR6001 OVAL TRAILER LED LIGHT

▶ 6 INCH ▶ 14 LED

- + 14 red LEDs: stop and turn taillight functions
- + Certification: FMVSS S2 T2 16 / 16/ R
- + Current consumption @ 12V DC: 0.6A



NEW! HE-TR6002 OVAL TRAILER LED LIGHT

▶ 6 INCH ▶ 14 LED

- + 14 amber LEDs: turn functions
- + Certification: FMVSS S2 T2 16 / 16/ R
- + Current consumption @ 12V DC: 0.6A



NEW! HE-TR6001 OVAL TRAILER LED LIGHT

▶ 6 INCH ▶ 14 LED

- + 14 white LEDs: backup function
- + Certification: FMVSS S2 T2 16 / 16/ R
- + Current consumption @ 12V DC: 0.6A



NEW! HE-TR4001 ROUND TRAILER LED LIGHT

▶ 4 INCH ▶ 14 LED

- + 14 red LEDs: stop and turn taillight functions
- + Certification: FMVSS S2 T2 16 / 16/ R
- + Current consumption @ 12V DC: 0.38A



NEW! HE-TR4002 ROUND TRAILER LED LIGHT

▶ 4 INCH ▶ 14 LED

- + 14 amber LEDs: turn functions
- + Certification: FMVSS S2 T2 16 / 16/ R
- + Current consumption @ 12V DC: 0.38A



NEW! HE-TR4003 ROUND TRAILER LED LIGHT

▶ 4 INCH ▶ 14 LED

- + 14 white LEDs: backup function
- + Certification: FMVSS S2 T2 16 / 16/ R
- + Current consumption @ 12V DC: 0.38A

COMMON FEATURES

CONNECTOR: PL-3 • HOUSING: ABS • LENS: PMMA • GROMMET: 6" RUBBER • SEALED: SONICALLY, WEATHER-RESISTANT



NEW! HE-TRWH03 PL-3 MALE RIGHT ANGLE CONNECTOR

▶ 10 PIECES

- + Bulk 10-pack of PL-3 connectors
- + 3-pin male
- + Use with HE-TR60xx and HE-TR40xx

TRAILER WIRING


IBTH4P 4 WAY 18GA

IBTH5P 5 WAY 18GA

TRAILER WIRING PLUGS

▶ 5 PIECES ▶ ALL COPPER

- + Connectors allow the basic hookup of the three lighting functions (running, turn and brake lights) plus one pin is provided for a ground wire (IBTH4P)
- + One pin is available to provide support for another function (IBTH5P)

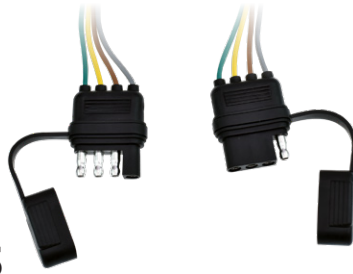


IBTH8P72
ALL COPPER

TRAILER HARNESS

▶ 12GA, 16GA, 8 PIN 72" ▶ 5 PIECES

- For custom harness applications
- + 12GA = Red, White, Black
- + 16GA = Yellow, Brown, Green, Blue, Grey

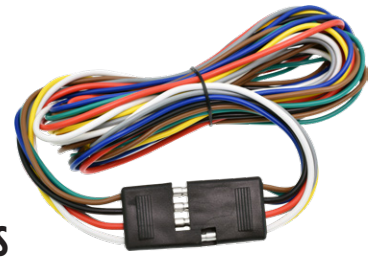

TRAILER WIRE

3-CONDUCTOR TRAILER WIRE

TWBGY14100 14GA BROWN/GREEN/YELLOW

TWBGY16100 16GA BROWN/GREEN/YELLOW

TWBGY18100 18GA BROWN/GREEN/YELLOW

4-CONDUCTOR TRAILER WIRE

TWBGYW14100 14GA BROWN/GREEN/YELLOW/WHITE

TWBGYW16100 16GA BROWN/GREEN/YELLOW/WHITE

TWBGYW18100 18GA BROWN/GREEN/YELLOW/WHITE

2-CONDUCTOR TRAILER WIRE

TWBKRD14100 14GA BLACK/RED

TWBKRD16100 16GA BLACK/RED

TWBKRD18100 18GA BLACK/RED

▶ 100 FOOT SPL ▶ ALL COPPER

- + Wire recommended for RV, boats and utility trailers



BULK

US GPT TRAILER WIRE COLORS

US18500R RED

US18500BL BLUE

US18500BR BROWN

US18500GR GREEN

US18500OR ORANGE

US18500PL PURPLE

US18500WT WHITE

US18500YL YELLOW

▶ 500 FOOT ▶ 18GA

- + GPT is designed for electrical usage in fleet vehicles
- + PVC coated high temp rated



ALL COPPER

JACKETED PRIMARY WIRE

2-CONDUCTOR

JPWBW8100 8GA BLACK/WHITE

JPWBW10100 10GA BLACK/WHITE

JPWBW12100 12GA BLACK/WHITE

JPWBW14100 14GA BLACK/WHITE

JPWBW16100 16GA BLACK/WHITE

3-CONDUCTOR

JPWBGW10100 10GA BLACK/GREEN/WHITE

JPWBGW12100 12GA BLACK/GREEN/WHITE

JPWBGW14100 14GA BLACK/GREEN/WHITE

JPWBGW16100 16GA BLACK/GREEN/WHITE

4-CONDUCTOR

JPWGRW10100 10GA BLACK/GREEN/RED/WHITE


JPWGRW12100 12GA BLACK/GREEN/RED/WHITE

JPWGRW14100 14GA BLACK/GREEN/RED/WHITE

JPWGRW16100 16GA BLACK/GREEN/RED/WHITE

▶ 100 FOOT

- + Wire recommended for auto, truck, construction and light marine
- + Heavy duty PVC outer jacket is abrasion resistant and protects against moisture, oil, acid and salt



JPW6100

ALL COPPER


JACKETED PRIMARY WIRE

▶ 100 FOOT SPL

- + 6 x 14GA
- + 4 x 14GA, 3 x 12GA




TRAILER WIRING

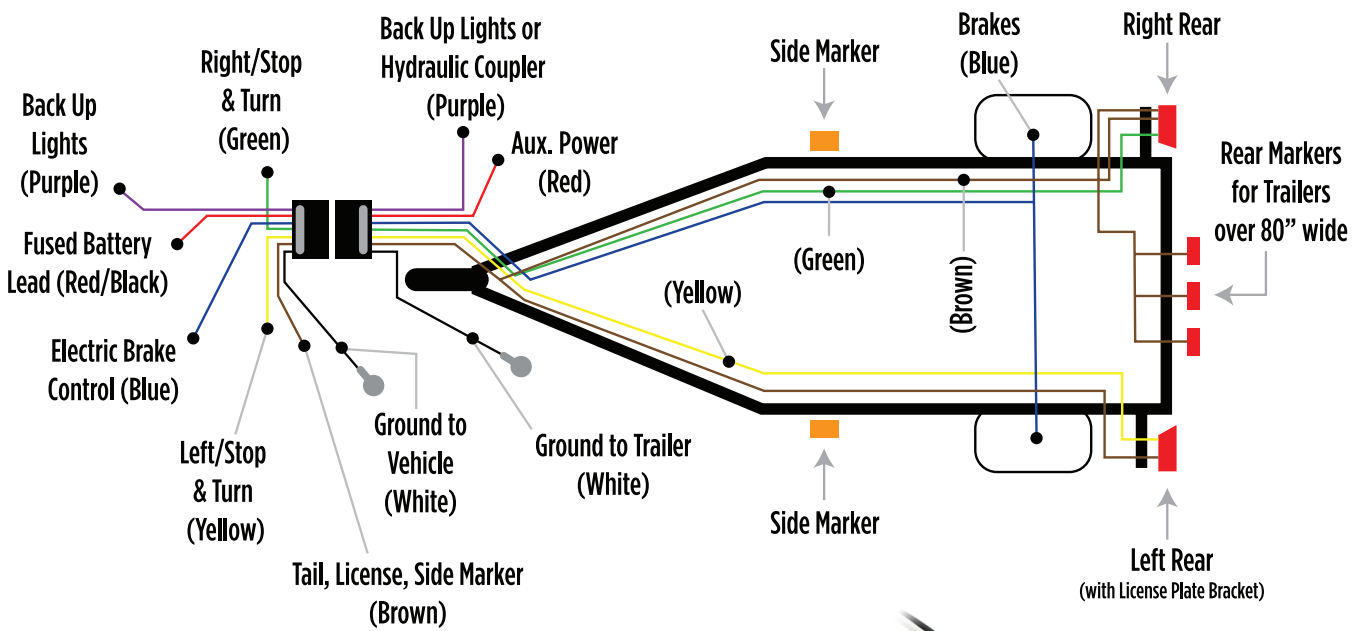

76-0200
2-WIRE CONNECTOR

▶ UNIVERSAL

+ Water-resistant

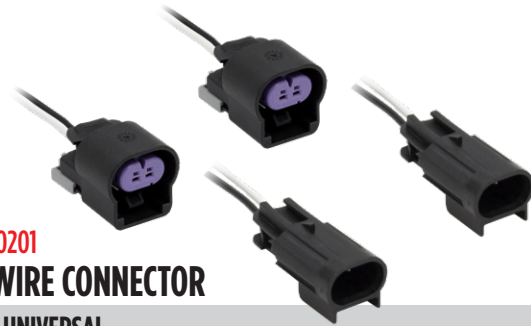

76-0201
2-WIRE CONNECTOR

▶ UNIVERSAL

+ Water-resistant



76-0300
3-WIRE CONNECTOR

▶ UNIVERSAL


+ Water-resistant



76-0600
6-WIRE CONNECTOR

▶ UNIVERSAL

+ Water-resistant

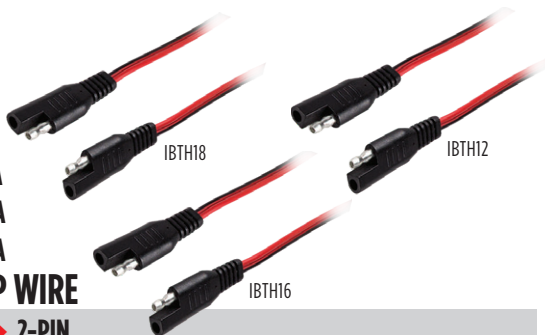

IBTH12 12GA
IBTH16 16GA
IBTH18 18GA
HOOK-UP WIRE

▶ 1 FOOT ▶ 2-PIN

+ All copper
+ Red/Black

- IBT-E01 6-PIN ROUND/4-WAY FLAT**
- IBT-E02 7-PIN ROUND/6-WAY FLAT**
- IBT-E03 7-WAY BLADE/4-WAY FLAT**
- IBT-E04 7-WAY BLADE/5-WAY FLAT**
- IBT-E05 7-WAY BLADE TO TRAILER END**
- IBT-E06 7-WAY BLADE TO VEHICLE END**
- IBT-E07 7-WAY BLADE 12V LED TESTER**
- IBT-E08 MOUNTING BRACKET**



TRAILER CONNECTORS

▶ PVC HOUSING WITH COPPER INTERNALS



IBR62
ATC FUSE HOLDER

▶ 12 GAUGE WIRE

- + Water-resistant design with mounting tab on cover
- + Great for marine, motorsports, ATV and motorcycle applications



IBR81
MINI ANL FUSE HOLDER

▶ SUPPORTS UP TO 4 GAUGE WIRE


- + Mini-ANL water-resistant fuse holder
- + Marine certified



IBR65
BLUETOOTH® AUDIO RECEIVERS

▶ FLUSH MOUNT, 1-1/8" MOUNTING HOLE REQUIRED

- + AUX input
- + Water-resistant
- + Remote turn-on comes on when streaming media
- + Independent volume and track controls

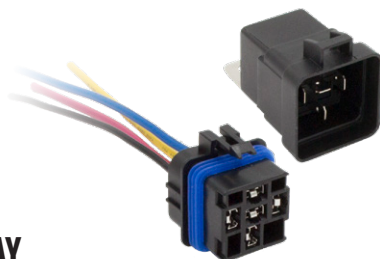

IBW-E123H
12V RELAY

▶ 5 PIN

- + 12/16GA
- + Water-resistant


INSTALLATION ACCESSORIES



IBR63
DUAL ATC FUSE HOLDER

▶ SUPPORTS UP TO 8 GAUGE WIRE

- + Mounting tab, supports up to 80 amps with two 40-amp fuses
- + Water-resistant connector
- + Can be used in marine, motorsports, ATV and motorcycle applications



IBR64
BLUETOOTH® AUDIO RECEIVERS

▶ WATER-RESISTANT DESIGN

- + Remote turn-on comes on when streaming media
- + Water-resistant
- + Upgrade existing non-bluetooth radio
- + Automatically reconnects with the last bluetooth device
- + RCA output



IBW-24VRLH
24V RELAY

▶ 5 PIN

- + 12/16GA
- + 30/40 amps
- + Water-resistant

IBRSSB16	STAINLESS, 16MM BLUE	EA
IBRSSB19	STAINLESS, 19MM BLUE	EA
IBRSSG16	STAINLESS, 16MM GREEN	EA
IBRSSG19	STAINLESS, 19MM GREEN	EA
IBRSSR16	STAINLESS, 16MM RED	EA
IBRSSR19	STAINLESS, 19MM RED	EA
IBRSSW16	STAINLESS, 16MM WHITE	EA
IBRSSW19	STAINLESS, 19MM WHITE	EA
IBRSSY16	STAINLESS, 16MM YELLOW	EA
IBRSSY19	STAINLESS, 19MM YELLOW	EA



IBRSSW16



IBRSSR16

STAINLESS LATCHING SWITCHES

▶ ROUND

- + Harness 3A
- + IP67 water-resistant

INSTALLATION ACCESSORIES

IBSP4	4-SWITCH PANEL WITH UNI SWITCHES	EA
IBSP6	6-SWITCH PANEL WITH UNI SWITCHES	EA
IBSS	2-PIN ON-OFF SWITCH NO LED	EA
IBSS2L	7-PIN WINCH SWITCH IN-OUT WITH 2 BLUE LEDS	EA
IBSS6P	6-PIN WINCH SWITCH IN-OUT WITH NO LEDS	EA
IBSSL	3-PIN ON-OFF SWITCH WITH RED LED	EA
IBSSR	3-PIN RADIO ON-OFF SWITCH WITH RED LED	EA
IBSSWB	6-PIN WINCH SWITCH IN-OUT WITH BLUE LED	EA



PANEL SWITCHES

▶ **CERTIFIED, UPGRADED SWITCHES - @24V = 10A @12V = 20A**

IBR78 USB SOCKET

▶ **PASS THROUGH FLUSH MOUNT**

- + 12V/24V with water-resistant cover
- + Direct to battery wiring & fused
- + Connection



IBR80 WATER-RESISTANT

▶ **3.5MM AUX-IN TO RCA-OUT**

- + Surface of flush mount AUX-in
- + Mounting hole: 7/8"
- + 2 meter cable



IBR79 DUAL USB MOUNT

▶ **12V MARINE**

- + Dual 2.1A 5V USB Lighter socket
- + IP65 rating
- + Water-resistant



IBR85 RED IBR86 WHITE IBR87 BLUE IBR88 GREEN IBR89 ORANGE DUAL 4.2A USB

▶ **3.0A USB 2.1A**

- + 29.2mm/1.15"



IBR92 USB & VOLTAGE ROUND

▶ **VOLTAGE MONITOR**

- + LED display
- + Water-resistant
- + Snap in extension cable
- + 1.5 meter length
- + Mounting hole: 29.2mm/1.15"



IBR93 VOLTMETER WITH CURRENT

▶ **DIGITAL VOLTAGE MONITOR**

- + Universal fit
- + Blue LED
- + Mounting hole: 28.5mm/1.10"



IBR94 IBR95 GRAPHIC DISPLAY

▶ **DIGITAL METER**

- + Graphic display
- + IBR94: 24V (15V-30V) IBR95: 12V
- + Mounting hole: 29.2mm/1.15"



IBR59 PANEL MOUNT FOR IBR56, IBR57 & IBR58 IBR60 SURFACE MOUNT FOR IBR56, IBR57 & IBR58 IBR61 UNDERDASH MOUNT FOR IBR57 & IBR58 MOUNTS

▶ **PANEL** ▶ **SURFACE** ▶ **UNDERDASH**



CLA FEMALE PLUG RETAIL PACKAGE CIGF 12V PLUG FEMALE CIGM MALE LIGHTER PLUG CIGARETTE LIGHTER PLUGS

▶ **10 AMP**

- + 12" leads



**IBK-150
TERMINAL KIT**

▶ **150 PIECE TERMINAL KIT**

+ Assorted vinyl butts, rings, spades and QD's with crimping tool



**IBK-175
TERMINAL KIT**

▶ **175 PIECE TERMINAL KIT**

+ Assorted vinyl butts, rings, spades and QD's



**IBK-175J
TERMINAL KIT**

▶ **175 PIECE TERMINAL KIT**

+ Assorted vinyl butts, rings, spades, QD's and closed end caps and IDC's



**IBK-300
TERMINAL KIT**

▶ **300 PIECE TERMINAL KIT**

+ Assorted vinyl butts, rings, spades and QD's



**IBK-HS120
SHRINK TERMINAL KIT**

▶ **HEAT SHRINK TERMINAL KIT**

+ Assorted heat shrink butts, push ons, rings and spades



**IBK-N300
NYLON TERMINAL KIT**

▶ **NYLON TERMINAL KIT**

+ Assorted nylon rings, spades, butts, male and female push-ons

HARDWARE

IBCLIP8 8AWG
IBCLIP10 10AWG
WIRE CLIPS



▶ 4 PER BAG



IBFG0 0AWG IP68 1-1/8" HOLE
IBFG4 4AWG IP68 7/8" HOLE
IBFG8 8AWG IP68 5/8" HOLE
FIREWALL GROMMETS

▶ 1 PACK

+ Includes sealing washers



FLUSH MOUNT GROMMETS

IBHPLUG1 1" BLACK 1-7/16" OD
IBHPLUG34 3/4" BLACK 1" OD
IBHPLUG78 1" BLACK 1-5/32" OD

▶ 100 PER BAG



FW188 FW316SC

FW188 #10 18-8

FW316SC #10 316

STAINLESS FLAT WASHERS

▶ 10 PER BAG



POHSC10134

NTSC1024 #10-24 18-8 S.S. HX NYLON INSERT

POHSC1034 #10 X 1-3/4 18-8 S.S. PHIL OVAL

POHSC102 #10 X 2 18-8 S.S. PHIL OVAL

POHSC834 #8 X 3/4 18-8 S.S. PH OVAL

PPHS1024114 #10 X 24 1-1/4" PHIL PAN

PPHSC141 #14 X 1 18-8 S.S. PHIL PAN

PPHSS101 #10 X 1 18-8 S.S. PH PAN

PPHSS81 #8 X 1 18-8 S.S. PH PAN

PTHSS838 #8 X 3/8 18-8 S.S. PHIL TRUSS

PPHSS838 #8 X 3/8 18-8 S.S. PHIL PAN

STAINLESS SCREWS

▶ 100 PER BAG

CSC

CAMOUFLAGE SCREW TOPS

▶ BLACK SCREW TOP ▶ 100 PER BAG

+ Includes washers



MW MINI WASHER 3/16" X 7/16"

FW 1/4" ID X 1" OD FENDER WASHER

FW14 1/4" ID X 5/8" OD FLAT WASHER

FW38 3/8" ID X 7/8" OD FLAT WASHER

IELW10 #10 INT/EXT/ LOCK WASHER

IELW10Z #10 INT/EXT LOCK WASHER ZINC

ELW8 WASHER EXTERNAL LOCK #8

ELW8P WASHER EXTERNAL LOCK #8 PLAIN

TR8 #8 TRIM RING

WASHERS AND TRIM RINGS

▶ 100 PER BAG



BH141 BUTTON, 1/4-20 X 1"

BH101 BUTTON, 10-24 X 1"

FH141 FLAT, 1/4-20 X 1"

FH101 FLAT, 10-24 X 1"

SOCKET HEAD BUTTON/FLAT

▶ 25 PER BOX

+ Includes washer and nuts, 18/8 stainless button



PWHS834

PWHS812 #8 X 1/2"

PWHS812Z #8 X 1/2" ZINC

PWHS834 #8 X 3/4"

PWHS81 #8 X 1"

PWHS83 #8 X 3"

PHILLIPS - WAFER HEAD

▶ 500 PER BOX

+ Stinger coarse



PWHS812M

PHILLIPS - WAFER HEAD

PWHS812M #8 X 1/2"

PWHS834M #8 X 3/4"

PWHS81M #8 X 1"

▶ 500 PER BOX

+ Stinger fine



IBTNKIT1

IBTNKIT1 1" PHILLIPS HEAD

IBTNKIT2 1.5" PHILLIPS HEAD

IBTNKIT3 2" PHILLIPS HEAD

IBTNKIT4 1" HEX HEAD

IBTNKIT5 1.5" HEX HEAD


IBTNKIT6 2" HEX HEAD

TEE NUTS & STAINLESS BOLTS

▶ 4 PIECES EACH

+ All tee nuts are zinc plated 1/4"-20 TPI x 5/16"

+ All Stainless bolts are 1/4"-20 TPI

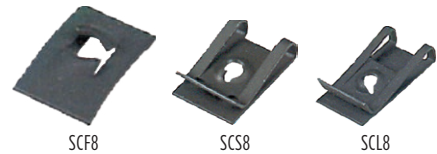

SCS8 #8 SHORT U TYPE

SCL8 #8 LONG U TYPE

SCF8 #8 FLAT

SPEED CLIPS

▶ 100 PER BOX



PPH81

PPH814 #8 X 1/4"

PPH812 #8 X 1/2"

PPH834 #8 X 3/4"

PPH81 #8 X 1"

PPH8112 #8 X 1 1/2"

PPH82 #8 X 2"

PPH83 #8 X 3"

PHILLIPS - PAN HEAD

▶ 500 PER BOX



PPHT81

PPHT812 #8 X 1/2"


PPHT834 #8 X 3/4"

PPHT81 #8 X 1"

PPHT8112 #8 X 1 1/2"

PHILLIPS - PAN HEAD TEK

▶ 500 PER BOX

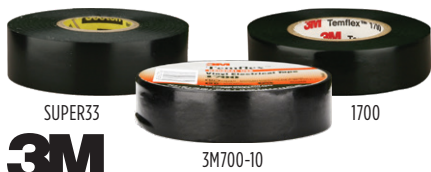

3M

**SUPER33
PREMIUM ELECTRICAL TAPE**

▶ EACH

+ 3/4" X 52' Vinyl UL and CSA rating. Highly conformable, flame retardant, super stretchy in all weather applications. Resists UV rays, abrasion, corrosion, alkalis and acids

**SUPER33-10
PREMIUM ELECTRICAL TAPE**

▶ 10 PER PACK

+ 3/4" X 52' premium grade, vinyl electrical

**1700
ECONOMY VINYL ELECTRICAL TAPE**

▶ EACH

+ 3/4" X 66', UL and CSA rating, flexible 7 mil.

**1700-10
ECONOMY VINYL ELECTRICAL TAPE**

▶ 10 PER PACK

+ 3/4" X 60', UL and CSA rating, flexible 7 mil.

**3M700-10
HIGH QUALITY VINYL TAPE**

▶ 10 PER PACK

+ UL listed standard insulating tape. Rated up to 600 volts. Resistant to abrasion, moisture, alkalis, acids, copper corrosion and varying weather conditions

**3METECW
ECONOMY VINYL ELECTRICAL TAPE**

▶ 10 PER PACK


+ White, 3/4" X 60'



**IBTT1 1" X 36 YDS
IBTT2 1/2" X 36 YDS
TEMPLATE TAPE**

▶ EACH ▶ WHITE

+ 2-sided, extremely aggressive tack for placing templates together with no sliding.



**3MDS20
ACRYLIC FOAM TAPE**

▶ EACH

+ 1/2" X 20 yds., .030", thick gray acrylic foam tape with proven performance acrylic adhesive and a red release liner.

**3MDS22
DOUBLE COATED FOAM TAPE**

▶ EACH

+ 7/8" X 20 yds., .030", thick gray acrylic foam tape with proven performance adhesive and a red release liner.

**3M4016
DOUBLE COATED URETHANE FOAM TAPE**


▶ EACH

+ Off-white, 1" X 36 yds. 1/16", high shear strength, durable on interior mounting applications, clean appearance. Use for bonding, attaching or mounting.

**3M4056
DOUBLE COATED URETHANE FOAM TAPE**

▶ EACH

+ Black, 1" X 36 yds. 1/16", high shear strength, durable on interior mounting applications, clean appearance. Use for bonding or attaching.



**P34000
DOUBLE STICK TAPE 1/4" X 50'**

▶ EACH

+ High-Strength - Allows repositioning for molding alignment

**P40519
DOUBLE STICK TAPE 1/2" X 50'**

▶ EACH

+ High-Strength - Allows repositioning for molding alignment

**P40519
DOUBLE STICK TAPE 1/2" X 50'**

▶ EACH


+ High-Strength - Allows repositioning for molding alignment

**P12220
MOLDING TAPE 1" X 50' .045"**

▶ EACH

+ High-Strength acrylic

TAPE



**3MBDT BLACK CLOTH DUCT TAPE, 2" X 60 YDS
3MSDT SILVER CLOTH DUCT TAPE, 2" X 60 YDS
DUCT TAPE**

▶ EACH



**TAPE2 MASKING TAPE, 2" X 60 YDS
TAPE34 MASKING TAPE, 3/4" X 60 YDS
3M233+ PREM. PAINTERS TAPE, 1" X 60 YDS
3M233+2 PREM. PAINTERS TAPE, 2" X 60 YDS
PAINTERS & MASKING TAPE**

▶ EACH



TAPE



IB50530

PROTECTION PAINT TAPE

▶ EACH ▶ 14" X 220 YARDS

tesa® Bodyguard® 50530 PV3 is the best protection solution for freshly painted car bodies. Applied after the painting process, tesa® Bodyguard® 50530 PV3 provides reliable protection for painted surfaces susceptible to damage. Due to the good UV-resistance and perfect paint compatibility, tesa® Bodyguard® 50530 PV3 is the most reliable way to protect cars during the transportation process.

- + Reliable protection
- + Secure adhesion during transport
- + Cost savings as polishing or repair after demasking is eliminated
- + Paint protection during outdoor storage up to 12 months
- + Easy to apply and remove
- + Easy disposal - both the film and the adhesive system are environmentally friendly



IB54118

WIRE HARNESS MOUNTING TAPE

▶ 1000 PIECES ▶ 2" X 4"

+ Cable mounting: For quick and secure fixation of flat and round cables with excellent damping properties. The product is also perfectly suitable for BSR applications



IB951618 3/8" X 82.5'

IB51618 3/4" X 82.5'

STANDARD INTERIOR HARNESS TAPE

▶ 16/SLV

Universal tape for wire harness bundling in the passenger compartment. It combines important features - such as noise damping, abrasion resistance and bundling strength - while keeping harnesses flexible supporting an easy harness assembly process at the OEM. Optimized for manual application. As PV10 solvent free available.

- + Flexible and smooth
- + Tear resistant
- + Stable unwind force



IB951618



IB51618



IB51136

INTERIOR PROTECTION TAPE

▶ EACH ▶ 9.5" X 72 YARDS

tesa® 51136 is a self-adhesive polyethylene tape with an acrylic adhesive for masking large areas of plastic parts during professional painting processes. The color of the tape provides a good contrast to dark surfaces making for easier and faster positioning. Furthermore, tesa® 51136 is an interior protection tape for slightly structured surfaces. tesa® 51136 PV2 is a higher adhesion version for rough surfaces and carpets.

- + Masking during painting applications
- + Protection of various surfaces against dirt and damage



IB4965

TRANSPARENT DOUBLE SIDED TAPE

▶ EACH ▶ 12MIL X 80'

Double-sided tape with high shear and temperature resistance. tesa® 4965 is a flagship product with the tesa® portfolio! This product is comprised of a polyester backing coated on both side with a transparent modified acrylic adhesive.

- + Reliable bonding, even to low surface energy substrates
- + Very high bonding strength immediate right after assembly
- + Applicable for most the demanding applications those including heavy stress, high temperatures or critical substrates



IB62934

DOUBLE SIDED PE-FOAM MOUNTING TAPE

▶ EACH ▶ 1" X 50 METERS

tesa® 62934 is a double-sided PE-foam tape for constructive mounting applications. It consists of a highly conformable PE-foam backing and a tackified acrylic adhesive.

- + Versatile adhesive for high immediate adhesion on numerous substrates
- + High ultimate adhesion level for a secure bonding performance
- + UV, water and age resistant



12508-19

HARNESS WRAP

▶ EACH

EXTERIOR

52879-19

19MM X 25M

8/SLV

52879-9

9MM X 25M

16/SLV

- High abrasion protection
- High-temperature resistance, up to 302 degrees
- Mainly used on exterior parts of the vehicle, including door panels, bumpers and engine bay



12508-9

INTERIOR

12508-19

19MM X 25M

8/SLV

12508-9

9MM X 25M

16/SLV

- Spiral interior harnessing for visible serviceability of wire colors as they are bundled
- Universal tape for wire harness wrapping in the interior compartment
- Noise dampening with abrasion resistance
- Bundling strength while keeping harnesses flexible



IB51608

PREMIUM INTERIOR HARNESS TAPE

▶ 8/SLV ▶ 3/4" X 82.5'

tesa® 51608 is the universal tape for wire harness bundling in the passenger compartment. It combines important features as noise dampening, abrasion resistance, and bundling strength while keeping harnesses flexible supporting an easy harness assembly process at the OEM. tesa® 51608 a PET fleece wire harness tape with a rubber based adhesive that is optimized for manual application.

- + Flexible and smooth
- + Age-resistant
- + Tear resistant
- + Strong adhesion
- + Stable unwind force
- + Hand-tearable



IB51026 3/8" X 82.5'

IB51036 3/4" X 82.5'

EXTERIOR HARNESSING TAPE

▶ 16/SLV

For wrapping exterior harnesses. This tape is a PET cloth wire harness tape with an acrylic based adhesive.

- + High temperature resistance 150°C/3000h
- + High abrasion resistance

MAXI-CURE1 1 OZ.
MAXI-CURE2 2 OZ.
INSTANT CURE GLUE



▶ **MAXI-CURE™**

MAXI-CURE™ bonds fiberglass, hardwood, metal and rubber better than any other hobby adhesive. For gluing to the inside, cloth textured surface of fiberglass, scrape the area to be bonded with a razor blade or coarse sandpaper before using MAXI-CURE™ or any other adhesive. It also is best for bonding the tires for R/C cars.

IC-2000
INSTANT CURE GLUE



▶ **1 OZ.**

IC-2000™ is a rubber-toughened cyanoacrylate that forms superior shock resistant bonds on non-porous surfaces. The black colored CA has added flexibility for the bonding of metals, fiberglass, rubber, carbon fiber and other materials.

INSTAC
INSTANT SET ACCELERATOR



▶ **2 OZ.**

Accelerator for quick curing of cyanoacrylates results in fast drying times and strong bonds between materials and surfaces of all kinds.

SPRGLDPLUS
INSTANT CURE GLUE



▶ **GAP FILLING GLUE ▶ 10 OZ.**

- + Non-frosting
- + Odorless

PT-50 5 OZ.
PT-15 2 OZ.
KICKER CA GLUE ACCELERATOR



▶ **ZIP KICKER**

Accelerates Super Glue cure time. Best working accelerator for ZAP and all other super glues you'll find! Sets in just a few seconds.

INSTA-FLE
INSTANT CURE GLUE



▶ **1 OZ.**

INSTA-FLEXTM™ flexible thin CA is ideal for many applications, including the installation of CA hinges. When cured INSTA-FLEXTM™ does not turn brittle and remains clear, even if accelerated with INSTA-SET™. It has superior shock resistance. INSTA-FLEXTM™ has also proven to be superior when bonding using anodized aluminum.

IC-GEL
INSTANT CURE GLUE



▶ **0.7 OZ.**

IC-GEL™ is a cyanoacrylate paste that is extremely thick which comes in an applicator tube like toothpaste. It has the same bonding and curing time characteristics as MAXI-CURE™; IC-GEL™, however, can be applied to a vertical surface and will stay in place. IC-GEL™ is excellent putty for plastic models. It will fill any void and can be formed to many shapes. Applying Insta-Set allows IC-GEL™ to be sanded or filed to final shape in less than 20 seconds.

INSTAUN
UN-CURE™



▶ **1 OZ.**

Debonder will soften cured CA. If parts are bonded incorrectly or your fingers are stuck together, a few drops of UN-CURE™ will dissolve the CA in about a minute. Apply on bonded skin and roll apart fingers. Once unstuck, use acetone to clean off softened CA, then wash off with soap and water.

QUICK-CURE
QUICK-CURE



▶ **9 OZ.**

Epoxy cures to a slightly flexible consistency. This lack of brittleness allows it to form a lasting bond in areas subjected to high vibration or stress. QUIK-CURE™ shouldn't be used in areas that are subject to long-term immersion in water; however, it works fine for the internal structure of wood framed boats. QUIK-CURE™ is our only epoxy on which you can apply polyester resins. It can be mixed with microballoons to form a quick setting putty. Items bonded with QUIK-CURE™ can be handled after 15 minutes. Full strength is reached in 1 hour.

INSTA-FLEX+
INSTANT CURE GLUE



▶ **1 OZ.**

INSTA-FLEX+™ clear rubber toughened has similar Qualities to our black IC-2000™ but can be used in applications where you do not want the adhesive to be seen. The carbon components of IC-2000™ that gives the CA its black color also contributes to its unsurpassed strength. When esthetic's are important and a flexible bond is required, INSTA-FLEX+™ is your best choice. It forms superior bonds to soft urethane and vinyl plastics.



YORKER

- INSTGL2 2 OZ. EACH**
- INSTGL4 4 OZ. EACH**
- INSTGL8 8 OZ. EACH**
- YORKER2 CA CAPS FOR ALL .5 OZ., 1 OZ. AND 2 OZ. 12 PACK**
- YORKER TOP FOR INSTGL8 EACH**

INSTANT CURE GLUE

▶ **HIGHER VISCOSITY**

A higher viscosity CA for loose fitting joints in which the adhesive must bridge gaps. Normally, the thicker CA is applied to one surface and then the parts are held tightly together for about 5 to 15 seconds.



PRO4000A



HMAHS

HMGS

PRO4000A
ELECTRIC GLUE GUN

▶ **EACH**

- HMG5 BLACK HOT MELT STICK 10"**
- HMGSC CLEAR HOT MELT STICK 10"**
- HMAHS AMBER HIGH STRENGTH STICK**

ELECTRIC GLUE STICKS

▶ **8 PER BAG**

ADHESIVE



BV34HK



BV34LP

BV1	HOOK/LOOP 1" X 36"	1 YD
BV1RL	HOOK/LOOP 1" X 5 YDS ROLL	5 YDS
BV1HK	1" X 25 YDS HOOK	25 YDS
BV1LP	1" X 25 YDS LOOP	25 YDS
BV21	2" X 1 YD HOOK/LOOP	1 YD
BV2HK	2" X 25 YDS HOOK	25 YDS
BV2LP	2" X 25 YDS LOOP	25 YDS
BV34HK	3/4" X 25 YDS HOOK	25 YDS
BV34LP	3/4" X 25 YDS LOOP	25 YDS

HOOK AND LOOP

▶ BLACK



3M08993



3M08663 3M08664

3MSCLR	CLEAR SILICONE SEALANT	3 OZ.
3MSBLK	BLACK SILICONE SEALANT	3 OZ.
3M08663	SUPER SILICON CLEAR	10.3 OZ.
3M08664	SUPER SILICON BLACK	10.3 OZ.
3M08993	CAULKING GUN	EACH

▶ SILICONE PRODUCTS

WOODGLUG	GAL
WOODGLUQ	QT
WOODGLUP	PT

▶ CARPENTER'S WOOD GLUE



IBAWIPE ALCOHOL WIPES

▶ 50 PACKETS

99.9% alcohol wipes



3MBVPK



TB3571

3MBVL-50	3M LOOP 1" X 50 YDS
3MBVH-50	3M HOOK 1" X 50 YDS
3MBVPK	3M HOOK/LOOP DISPLAY BOX
	1" X 4.9 YDS

3MDLYD	3M DUAL LOCK 1 YD
TB3571	3M HOOK/LOOP 1" X 10'

HOOK AND LOOP

▶ BLACK



3M04240



3M04247

DURAMIX

3M04240

SEMI-RIGID PLASTIC REPAIR

▶ 6.25 OZ.

Urethane plastic repair material for repairing damaged bumpers and re-building tabs. Can also be used to bond many dissimilar materials such as plastic, fiberglass and metal. Used for backside reinforcement repair on a variety of plastic.

3M04247

SUPER FAST PLASTIC REPAIR

▶ 6.25 OZ.

A two-component adhesive that has a very fast gel and cure time. The two parts consist of a base side and an accelerator side. The two parts are always mixed together. Used for rebuilding tabs and fixing broken eyelets. Has excellent wide gap filling capabilities. Will not run or sag.



3M08571



3M08193

3M08571	APPLICATOR	EACH
3M08193	DURAMIX NOZZLE	6/PK



3MWW

WINDOW-WELD RIBBON SEALER

▶ EACH ▶ 1/4IN X 15 FT

+ 1/4" x 15' butel dum dum



3M77

SUPER 77 SPRAY ADHESIVE

▶ 16.75 OZ.

High tack, high coverage and fast drying for permanently attaching foils, carpeting, lightweight foams, paper, cardboard, felt and cloth to painted metals, wood and hardboard



3M80

NEOPRENE CONTACT SPRAY

▶ 19 OZ.

First true contact adhesive in aerosol form. Exceptional resistance to plasticizing oils. Bonds rubber and supported vinyls better than many typical bulk neoprene contact



3M08984

3M ADHESIVE CLEANER

▶ 32 OZ.

Specially blended solvent which provides easy cleanup of most types adhesives, bugs, greases and oils, overspray, silicone, waxes and tars



3M06396

ADHESION PROMOTER

▶ 25 PACKETS

This is a liquid primer used to improve the adhesion of automotive attachment tapes to most low surface energy plastic materials as well as injection-molded body side moldings and claddings used for automotive exterior trims



3M Strip-Calk

08578 (black)
25 yds. (80 feet) 1 inch strength.
CAUTION: DO NOT USE FOR AUTOMOTIVE INTERIORS.



3MSTC

STRIP CAULK

▶ 1" STRIPS ▶ 60 STRIPS PER BOX

Soft non-hardening caulking material for use in all types of seams, joints and openings. Product is easily thumbed into place and smoothed with finger

ADHESIVE



P10310 KENT AUTOMOTIVE™ SEAL N CAULK

▶ 72 FOOT ▶ BLACK

Non-hardening, pliable caulking strips for general purpose automotive sealing and caulking

APSA



APSA ALL PURPOSE SPRAY ADHESIVE

▶ 12 OZ.

Temporary or permanent bonding, is ideal for uneven or porous surfaces and weight materials. Water-resistant, flexible, transparent and non-staining use with leather, cardboard, most plastics and cloth

APSAFF PRESSURE SENS ADHESIVE CARPET

▶ 12 OZ.

Pressure sensitive adhesive, designed for automotive carpet and cloth. Instant tack, low soak in

APSAHT CONTACT CEMENT HIGH HEAT

▶ 16 OZ.

Contact cement adhesive for high heat applications. Great for vinyl. Adjustable nozzle-web spray pattern



P50077



IB05185

P50077	DRY LUBE CLEANER	10.25 OZ.
P50079	SILICONE SPRAY	10 OZ.
IB05074	HEAVY DUTY SILICONE	7.5 OZ.
IB05101	QD ELECTRONIC CLEANER	4.5 OZ.
IB05185	DUSTER AEROSOL	8 OZ.
IB05401	GLASS/DASH MULTI CLEANER	18 OZ.
IB05105	DIELECTRIC GREASE	3.3 OZ.

▶ SPRAYS AND CLEANERS



MC918-250 MULTI-CONDUCTOR CABLE

▶ 18GA ▶ 250 FOOT ▶ EACH

- + Conductor EIA
- + Color coded
- + All copper



IBGN10-50

IBPC04R-125

IBPC04R-125	4GA	RED	EACH 125FT
IBPC08R-250	8GA	RED	EACH 250FT
IBPC10-50	1/0GA	BLUE	EACH 50FT
IBPC04-125	4GA	BLUE	EACH 125FT
IBPC08-250	8GA	BLUE	EACH 250FT
IBGN10-50	1/0GA	BLACK	EACH 50FT
IBGN04-125	4GA	BLACK	EACH 125FT
IBGN08-250	8GA	BLACK	EACH 250FT

▶ CCA VALUE LINE POWER CABLE



IBSW12-250	12GA	EACH 250FT
IBSW14-250	14GA	EACH 250FT
IBSW16-500	16GA	EACH 500FT
IBSW18-1000	18GA	EACH 1000FT

CCA VALUE LINE SPEAKER WIRE

▶ CLEAR

WIRE



SWRB12500

SW18-1000

SW12-250	12GA	CLEAR	EA/250FT
SW12-500	12GA	CLEAR	EA/500FT
SW14-500	14GA	CLEAR	EA/500FT
SW16-500	16GA	CLEAR	EA/500FT
SW18-1000	18GA	CLEAR	EA/1000FT
SWRB8100	8GA	RED/BLK PAIR	EA/100FT
SWRB10100	10GA	RED/BLK PAIR	EA/100FT
SWRB12100	12GA	RED/BLK PAIR	EA/100FT
SWRB12500	12GA	RED/BLK PAIR	EA/500FT
SWRB14100	14GA	RED/BLK PAIR	EA/100FT
SWRB14500	14GA	RED/BLK PAIR	EA/500FT
SWRB16-500	16GA	RED/BLK PAIR	EA/500FT
SWRB18500	18GA	RED/BLK PAIR	EA/500FT

▶ ALL COPPER SPEAKER WIRE




AS-SW16-100

AS-SW16-50	EACH 50FT
AS-SW16-100	EACH 100FT
AS-SW16-250	EACH 250FT
AS-SW16-500	EACH 500FT

AS COPPER SPEAKER WIRE

▶ 16GA ▶ CLEAR

INSTALLATION ACCESSORIES

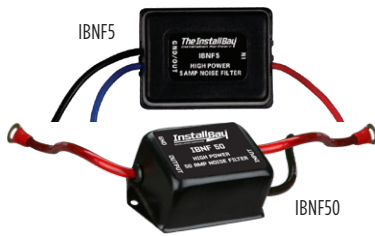

IBNF5 5 AMP **IBNF40** 40 AMP
IBNF10 10 AMP **IBNF50** 50 AMP
IBNF30 30 AMP

NOISE FILTER

▶ EACH

For filtering 12v car audio products that have induced noise from alternators and other ignition sources.



IBLOC01

2 - CHANNEL ADJUSTABLE LEVEL LINE OUTPUT CONVERTER

▶ HANDLES UP TO 40W INPUT POWER

- + Fully adjustable dual output level controls
- + Transformer design isolates ground loops

IBLOC02

2 - CHANNEL ADJUSTABLE LEVEL LINE OUTPUT CONVERTER

▶ HANDLES UP TO 80W INPUT POWER

- + Fully adjustable dual output level controls
- + Transformer design isolates ground loops
- + Wired input to 2 RCA female out

BLOC04

4 - CHANNEL ADJUSTABLE LEVEL LINE OUTPUT CONVERTER

▶ HANDLES UP TO 60W INPUT POWER+

- + Fully adjustable dual output level controls
- + Transformer design isolates ground loops
- + Wired input to 4 RCA female out



IBGLI

GROUND LOOP ISOLATOR

▶ EACH

For removing pops, clicks and engine noise when using factory amps with aftermarket radios.



L-IBVSTABL

▶ DC/DC VOLTAGE STABILIZER ▶ EACH

- + 10A 9-36v input
- + 12v 10A output
- + IP67 rating

IBVSTABL

▶ DC/DC VOLTAGE STABILIZER ▶ EACH

- + Keeps voltage constant at 12 volts
- + Provides a 2 amp output
- + Accepts voltage input from 8-40 volts



IBVRUSB125 12V TO 5V USB VOLTAGE REDUCER

IBVRGC126 12V TO 6V FOR GOLF CARTS

▶ DC/DC CONVERTERS ▶ EACH



IBLEDBLF

▶ STROBE FLASH CONTROLLER ▶ EACH

- + Safety flash controller for LED Brake Light
- + Flashes third brake light for greater visibility



IBBLF

▶ BRAKE LIGHT FLASHER ▶ EACH

- + For use with non-LED third brake lights
- + Flashes third brake light for greater visibility



PS12

10 AMP POWER SUPPLY

▶ 7 7/8" L X 1 1/2" H X 3 7/8" W

OUTPUT:

- + 12V DC voltage
- + 8.3A current rating
- + 99.6W power rating
- + 10.8-13.2V adj. range

INPUT:

- + 85-264VAC 120-370VDC range
- + 47-63Hz frequency range
- + 82% efficiency (Typ.)
- + 2.4A/110VAC 1.2A/220VAC



IBPS35

35 AMP POWER SUPPLY

▶ 10.5" D X 3.5" H X 7.2" W ▶ EACH

- + 430 watts max output
- + 5 amps max AC current @ 108vac

IBPS55

55 AMP POWER SUPPLY

▶ 10.5" D X 3.5" H X 7.2" W ▶ EACH

- + 55 amp power supply
- + 780 watts max output
- + 7 amps max AC current @ 108VAC

IBPS75

75 AMP POWER SUPPLY

▶ 10.5" D X 3.5" H X 7.2" W ▶ EACH

- + 75 amp power supply
- + 1065 watts max output
- + 12 amps max AC current @ 108VAC

IBPS100

100 AMP POWER SUPPLY

▶ 10.5" D X 3.5" H X 7.2" W ▶ EACH

- + 100 amp power supply
- + 1440 watts max output
- + 13 amps max AC current @ 108VAC

POWER SUPPLY COMMON FEATURES

- + LED light, switchable outputs between smart charging and single fixed voltage (Which can be set between 13V and 16.5V)
- + Built-in 4 stage smart charger
- + Deck mount converter
- + UI-cul approved
- + Quiet internal fan cooling
- + Overtemp protection
- + Reverse polarity protection
- + (PFC) power factor correction
- + DC output voltage 13.6V/14.4 (DC)
- + Output voltage tolerance + or - 7%
- + More efficient & clean power supply
- + Input voltage range 105-135 AC